BACK BAR EQUIPMENT

Model: BB59SNSSGDPT

Natural Refrigerant R-290 Model

59" Back Bar Display Pass-Thru Cooler with Hinged Glass Doors Shallow Depth

Stainless steel exterior, countertop, interior back and side panels with reinforced stainless steel floor.




Options and Accessories

(upcharge and lead times may apply)

| Additional epoxy coated shelves | Condensing unit on right |
|---|--------------------------|
| Stainless steel shelves | Wine rack |
| Food storage rated stainless steel interior (NSF-7) | Casters or legs |
| Riser base* (field installed) | Standard depth |
| Solid doors (consult factory) | |
| Sliding glass doors (consult factory) | |

Consult factory for other model configurations, options and accessories.

* Adding a Riser Base increases overall height 2'

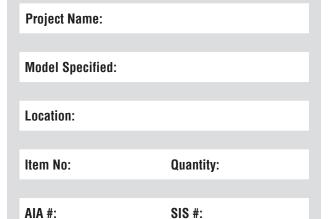

Standard Model Features

REFRIGERATION SYSTEM

Performance rated front breathing refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, hot gas condensate evaporator

Extra large, balanced evaporator coil

CABINET ARCHITECTURE

High density, non-CFC polyurethane foamed-in-place insulation

Front, rear and side venting louvered grills

Double pane, tempered low emissivity hinged glass doors

Magnetic snap in door gaskets

Cylinder keyed security lock in each door

Stainless steel reinforced threshold

MODEL FEATURES

Low profile cabinet design

Electronic controller with digital display & hi-low alarm

LED interior lighting

Off-cycle defrost

Easily accessible and serviceable slide-out condensing unit

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

| DIMENSIONAL DATA | |
|---|---------------|
| Net Capacity (cubic feet) | 15 (425 cu I) |
| Width, Overall (inches) | 59 (1499 mm) |
| Depth, Overall (inches) (including handles) | 26 ½ (667 mm) |
| Depth, Body Only (inches) (less doors) | 21 (533 mm) |
| Height, Overall (inches) | 34 ¾ (883 mm) |
| Capacity: # Barrel Kegs | 2 |
| Capacity: # Straight Wall Kegs | 2 |
| Capacity: # 1/6 Size Kegs | 8 |
| Number of Doors | 4 |
| Number of Shelves | 4 |

REFRIGERANT DATA

| Condensing Unit Size (H.P.) | 1/4 |
|-----------------------------|------|
| Capacity (BTU per hour)* | 2025 |

ELECTRICAL DATA

| Voltage (International) | 115/60/1 (220/50/1) |
|---|---------------------|
| Feed Wires (including ground) | 3 |
| Total Amps (International) | 3.7 (3.4) |
| 10 ft. Cord/Plug [attached] (International) | Yes (No) |

SHIPPING DATA

| Weight (pounds) | 415 (188 kg) |
|--------------------------|--------------|
| Height - Crated (inches) | 46 (1168 mm) |
| Width - Crated (inches) | 65 (1651 mm) |
| Depth - Crated (inches) | 42 (1067 mm) |

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator.

A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

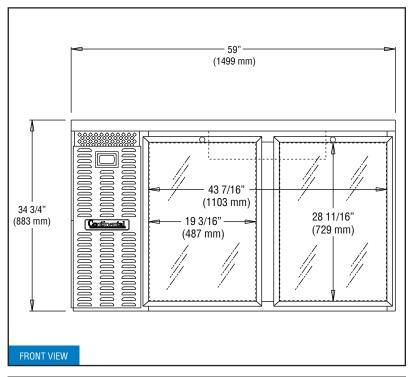

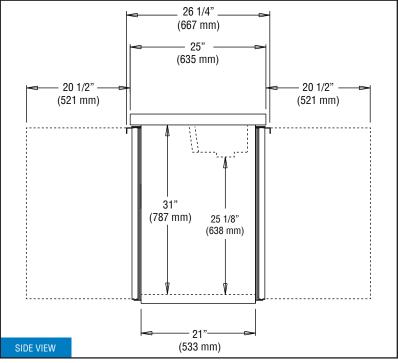

IMPORTANT NOTE: Models are completely front breathing and take in and exhaust air through the front grill. For proper operation, the area in front and back of the cabinet **must** not be obstructed in any way. A clearance of 3" on the sides is recommended.