

# HANDLE OPERATED COFFEE BREWER

## CBS-5000 Series

### CBS-52H-20

Twin 2.0 Gallon Brewer



Shown with 2.0 Gallon LUXUS® Thermal Dispensers (L40-20)

The CBS-5000 Series was designed for simplicity. The Handle Operated Series brewers save the operator time and effort by delivering quick and consistent results from your pre-programmed coffee recipe. It is the reliable choice for serving high-volumes of single batch coffee all day long.



**Handle operation — a quick start!**

Simply twist the handle to begin the brew cycle and in minutes your perfectly brewed coffee is ready to serve.



**Manual water faucet.**

Safely dispense hot water away from steam and brew basket.



**Set it and forget it.**

Program your recipe once and this brewer delivers consistent and repeatable results.

**FETCO®**  
TRUSTED | RELIABLE | QUALITY

## Water Specification

**Water Inlet**  
3/8" male flare fitting

**Minimum Flow Rate**  
1 1/4 gpm [4.71 lpm]

**Water Pressure**  
20-75 psig [138-517 kPa]


## Electrical Configuration

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] /Hour
<b>US &amp; CANADA</b>								
C53016	2 x 3.0 kW	120/208-240	1	3+G	4.6-6.1	Terminal Block	22.0-25.4	14.0-20.0 [53.0-75.7] <sup>(1)</sup>
C53026	2 x 4.0 kW	120/208-240	1	3+G	6.1-8.1	Terminal Block	29.3-33.8	20.0-26.0 [75.7-98.4] <sup>(1)</sup>
C53036 <sup>(2)</sup>	3 x 3.0 kW	120/208-240	3	4+G	7.0-9.1	Terminal Block	19.4-22.4	22.0-30.0 [83.3-113.6] <sup>(1)</sup>
C53046 <sup>(2)</sup>	3 x 4.0 kW	120/208-240	3	4+G	9.1-12.1	Terminal Block	25.6-29.6	33.0-40.0 [113.6-151.4] <sup>(1)</sup>
C53186 <sup>(2)</sup>	3 x 4.0 kW	440-480	3	3+G	10.3-12.1	Terminal Block	13.6-14.8	34.0-40.0 [128.7-151.4] <sup>(1)</sup>
<b>INTERNATIONAL</b>								
C53076 <sup>(2)</sup>	3 x 3.0 kW	220-240/380-415	3	4+G	7.8-9.1	Terminal Block	11.8-12.9	26.0-30.0 [98.4-113.6] <sup>(1)</sup>
C53086 <sup>(2)</sup>	3 x 4.0 kW	220-240/380-415	3	4+G	10.3-12.1	Terminal Block	15.7-17.1	34.0-40.0 [128.7-151.4] <sup>(1)</sup>
C53096	2 x 3.0 kW	220-240	1	2+G	5.1-6.1	Terminal Block	23.3-24.4	18.0-20.0 [68.1-75.7] <sup>(1)</sup>
C53106	2 x 4.0 kW	220-240	1	2+G	6.8-8.1	Terminal Block	30.9-33.8	24.0-26.0 [90.8-98.4] <sup>(1)</sup>

(1) Based on standard factory settings: 4.0 minute brew time; 0% prewet; 200°F water.  
(2) Requires 3 phase Electrical Power System (Z056).

## Measurements

<b>Height</b> 39 1/2" [100.3 cm]	<b>Width</b> 21" [53.3 cm]	<b>Depth</b> 16" [40.6 cm]	<b>Empty Weight</b> 87 lbs [39.5 kg]	<b>Filled Weight</b> 150 lbs [68.0 kg]	<b>Shipping Weight</b> 100 lbs [45.4 kg]	<b>Shipping Dimensions:</b> 38" x 23" x 24" [96.5 x 58.4 x 61.0 cm]
-------------------------------------	-------------------------------	-------------------------------	---	---	---	--

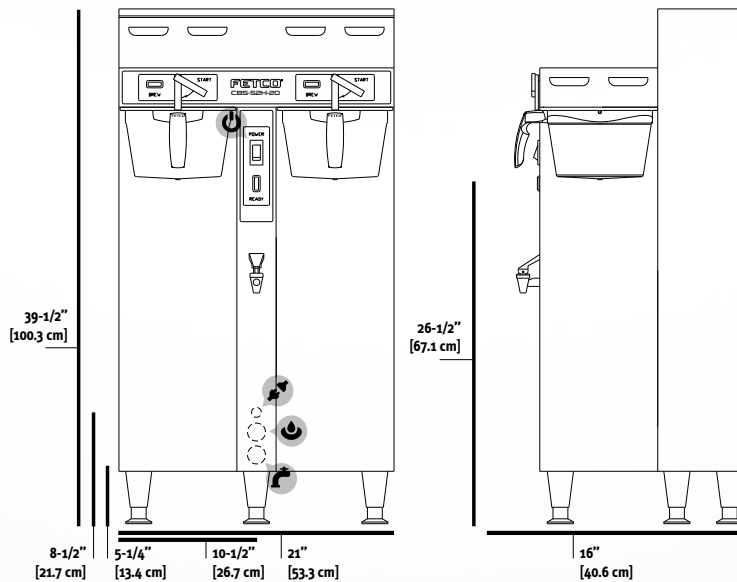

- Electrical Connector
- Tank Drain
- Water Inlet
- On / Off Switch



## Compatible Dispensers

2.0 Gallon LUXUS® Thermal Server (L4S-20)  
Must be used with S4S Serving Stations.

D453

2.0 Gallon LUXUS® Thermal Dispenser (L4D-20)

D450

## Customize Your Brewer

Single Serving Station for L4S-15/20 Server  
Twin Serving Station for L4S-15/20 Server  
Triple Serving Station for L4S-15/20 Server  
Identifier Plates, Acrylic

A150  
A151  
A152  
A069

## Cups per Hour\*

8oz. **475** 12oz. **317** 16oz. **238** 20oz. **190**

\* Approximate based on maximum power setting.

## Paper Coffee Filters

15" x 5.5" (500/Case)

F001

## Information

fetco.com

info@fetco.com

847.719.3000  
1.800.338.2699 USA  
 847.719.3001

Food Equipment Technologies Co.  
600 Rose Road  
Lake Zurich, IL 60047  
USA