



**SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR**  
2-, 4- AND 6-DOOR



PTS36 shown



JOB	
AREA	
ITEM NO.	
MODEL NO.	

PTS36	2-Door Model
PTS60	4-Door Model
PTS84	6-Door Model

NSF/ANSI Standard 7 Listed for open food storage.  
Note: Models furnished with wine temperature are listed for the storage and display of bottled and canned products only.


MODEL NUMBERS		PTS36	PTS60	PTS84
<b>NUMBER OF DOORS</b>		2	4	6
<b>EXTERIOR CABINET DIMENSIONS</b>	Length - in. (mm)	36 (914)	60 (1524)	84 (2134)
	Depth - in. (mm)	26 <sup>1</sup> / <sub>16</sub> (678)	26 <sup>1</sup> / <sub>16</sub> (678)	26 <sup>1</sup> / <sub>16</sub> (678)
	Height - in. (mm)	34 <sup>3</sup> / <sub>16</sub> (878)	34 <sup>3</sup> / <sub>16</sub> (878)	34 <sup>3</sup> / <sub>16</sub> (878)
<b>INTERIOR CABINET DIMENSIONS</b>	Length - in. (mm)	20 (508)	44 (1118)	68 (1727)
	Depth - in. (mm)	18 <sup>3</sup> / <sub>4</sub> (476)	18 <sup>3</sup> / <sub>4</sub> (476)	18 <sup>3</sup> / <sub>4</sub> (476)
	Height - in. (mm)	31 (787)	31 (787)	31 (787)
<b>INTERNAL VOLUME Net. Cu. Ft. (Litres)</b>		8.0 (227)	17.4 (493)	26.7 (756)
<b>PRODUCT CAPACITY</b>	CASE PACKED - 12 OZ. BOTTLE/CAN	182/273	371/553	581/868
	STAGGERED - 12 OZ. BOTTLE/CAN	196/292	400/592	628/932
<b>SHIPPING WEIGHT Lbs. (kg.)</b>		264 (120)	354 (161)	496 (225)
<b>ELECTRICAL SPECIFICATIONS</b>	Electrical Supply	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph
	Running Load Amps	1.8	2.5	4.2
	Electrical Connection	Cord connected	Cord connected	Cord connected
	Cord Plug Type	NEMA 5-15	NEMA 5-15	NEMA 5-15
	Cord Length	6'5"	6'5"	6'5"
	Defrost Initiation	Automatic	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle	Off cycle
	Thermostat	Digital control	Digital control	Digital control
	Lighting Type	LED	LED	LED
<b>REFRIGERATION SPECIFICATIONS</b>	Horsepower	1/6	1/5	1/4
	Refrigerant	R290	R290	R290
	Refrigerant Charge gm.	90	100	90
	Factory Temperature Setting-Refrigerator F (C)	38° (3.3°)	38° (3.3°)	38° (3.3°)
	Temperature Range-Refrigerator F (C)	33°-40° (0.5°-4.5°)	33°-40° (0.5°-4.5°)	33°-40° (0.5°-4.5°)
	Factory Temperature Setting-White Wine F (C)	50°-55° (10.0°-13.0°)	50°-55° (10.0°-13.0°)	50°-55° (10.0°-13.0°)
	Factory Temperature Setting-Red Wine F (C)	60°-65° (15.5°-18.0°)	60°-65° (15.5°-18.0°)	60°-65° (15.5°-18.0°)
	Temperature Range-Wine F (C)	50°-65° (10.0°-18.0°)	50°-65° (10.0°-18.0°)	50°-65° (10.0°-18.0°)
	Condensing Unit Location	Left or Right	Left or Right	Left or Right
	Expansion Device	Capillary tube	Capillary tube	Capillary tube
<b>PLUMBING</b>	Pull Out Condensing Unit	Yes	Yes	Yes
	Front Vented	Yes	Yes	Yes
	Floor Drain Included	Yes	Yes	Yes
	Evaporator Condensate	Automatically	Automatically	Automatically



**SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR**  
2-, 4- AND 6-DOOR

MODEL NUMBERS - PTS36, PTS60, PTS84

*Note: Open floor drain not provided on models intended for non-packaged food.*

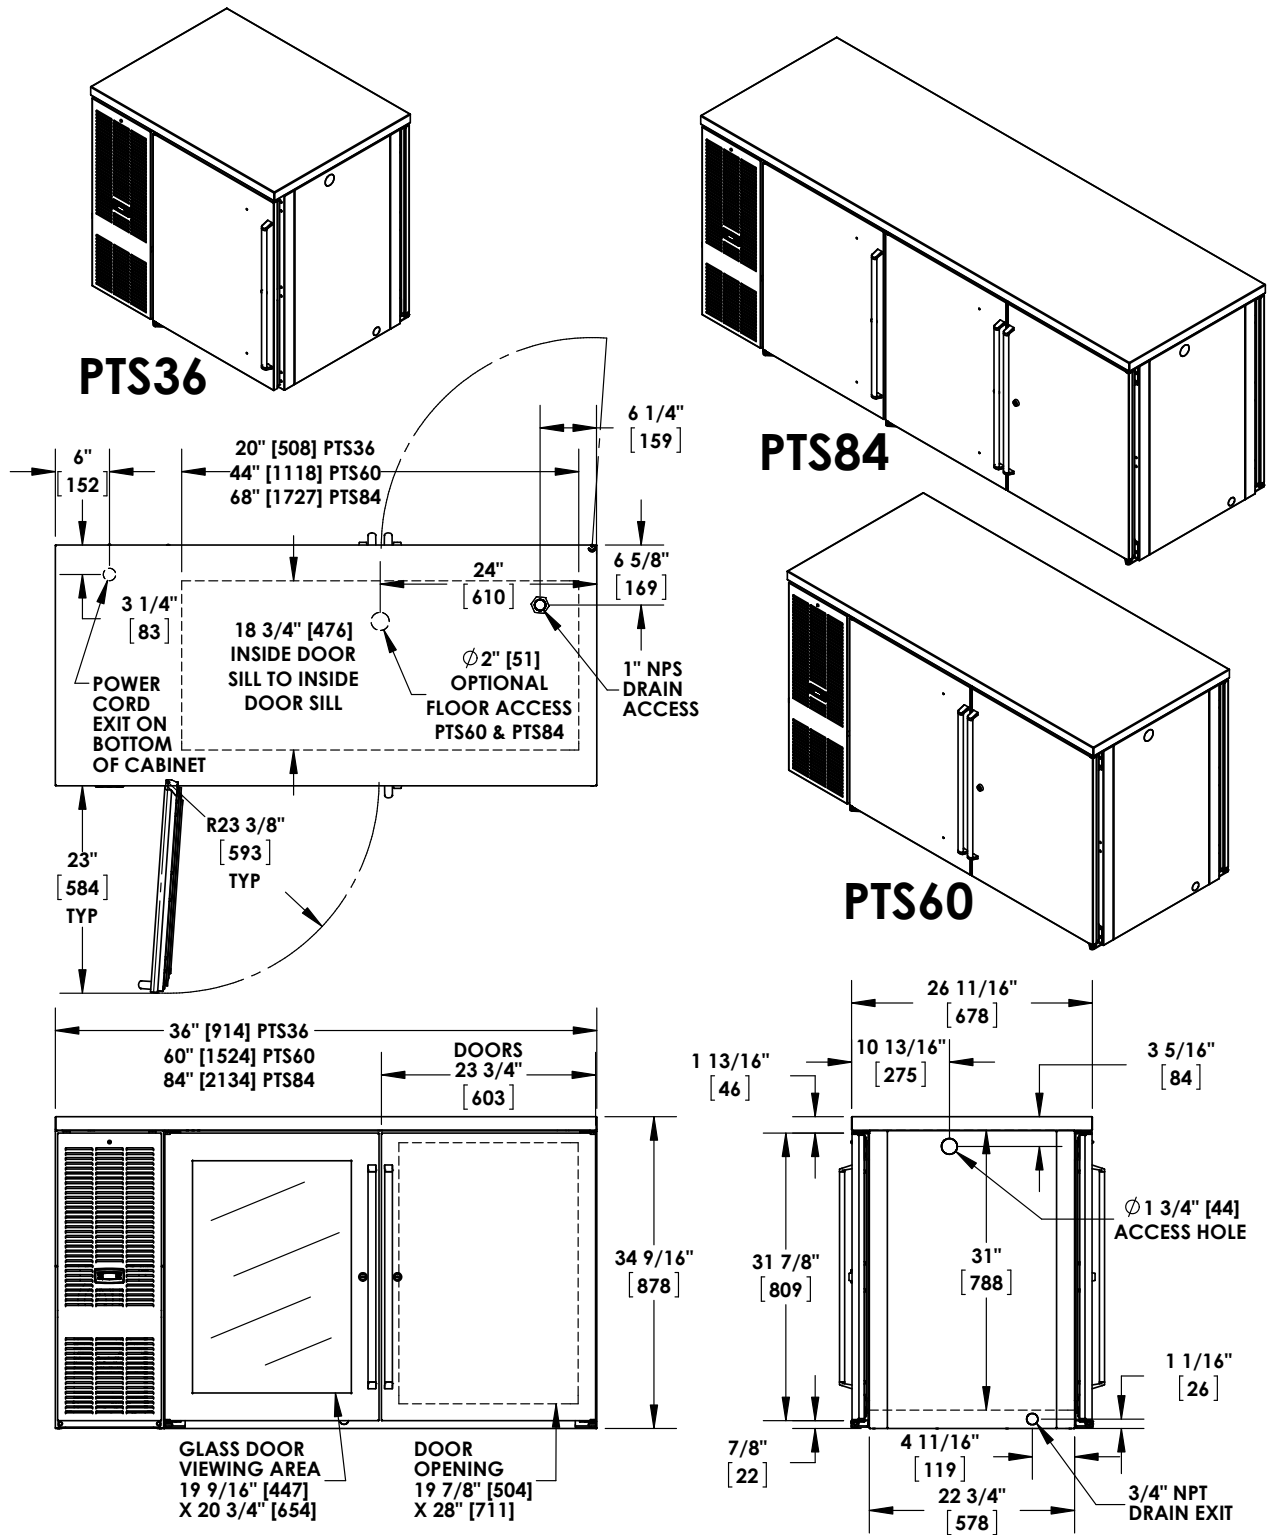

**California Prop 65 Notice:**

**WARNING:** The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Form No. Z2381  
Rev. 06.16.2022