

Project Name: _____
 Location: _____
 Item #: _____ Qty: _____
 Model: _____

MEGATOP PREP TABLES

MODEL: MXCR29MHC MXCR48MHC MXCR60MHC MXCR72MHC



MXCR29MHC



MXCR48MHC



MXCR60MHC



MXCR72MHC


Maxx Cold Mega Prep tables offer additional pan space compared to standard sandwich/salad stations. Choose from 4 models offering storage from 7, 12, 15.5 and 18 cubic feet that accommodate 12, 16, 24 and 27 pans. Constructed of stainless steel, easy grip recessed handles, LED temperature display and equipped with a 9" deep cutting board our Mega Prep tables will streamline your food prep operations.

FEATURES AND CONSTRUCTION

- Stainless steel exterior and powder coated aluminum interior construction
- Easy to grip recessed door handles
- Adjustable heavy-duty wire shelves (1 per section/door)
- Equipped with four (4) 3" swivel casters (two with brakes)
- Equipped with full set of clip-on divider bars and 4" deep plastic pans
- Equipped with 9" deep polyethylene cutting board
- Solid state digital control system
- LED temperature display
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors
- Accommodates full-size sheet pans

ELECTRIC

115V / 60Hz / 1Ph
 (230V / 50-60Hz / 1Ph is available as an option)
 6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Zero Ozone Depletion Potential



DOE 2017 Compliant

MAXX COLD WARRANTY (USA / CANADA)

Contact Maxx Cold for warranty statement at
 TechnicalServices@TheLegacyCompanies.com or 877.368.2797


NET STORAGE CAPACITY (Cu Ft & 1/6 Pans)

MXCR29MHC	7 Cu Ft (198 L) / 12 Pans
MXCR48MHC	12 Cu Ft (340 L) / 16 Pans
MXCR60MHC	15.5 Cu Ft (439 L) / 24 Pans
MXCR72MHC	18 Cu Ft (510 L) / 27 Pans

TEMPERATURE

Holding temperature 33°F to 41°F (1°C to 5°C)

- Solid-state controls and forced-air system deliver consistent, easily adjustable temperature performance

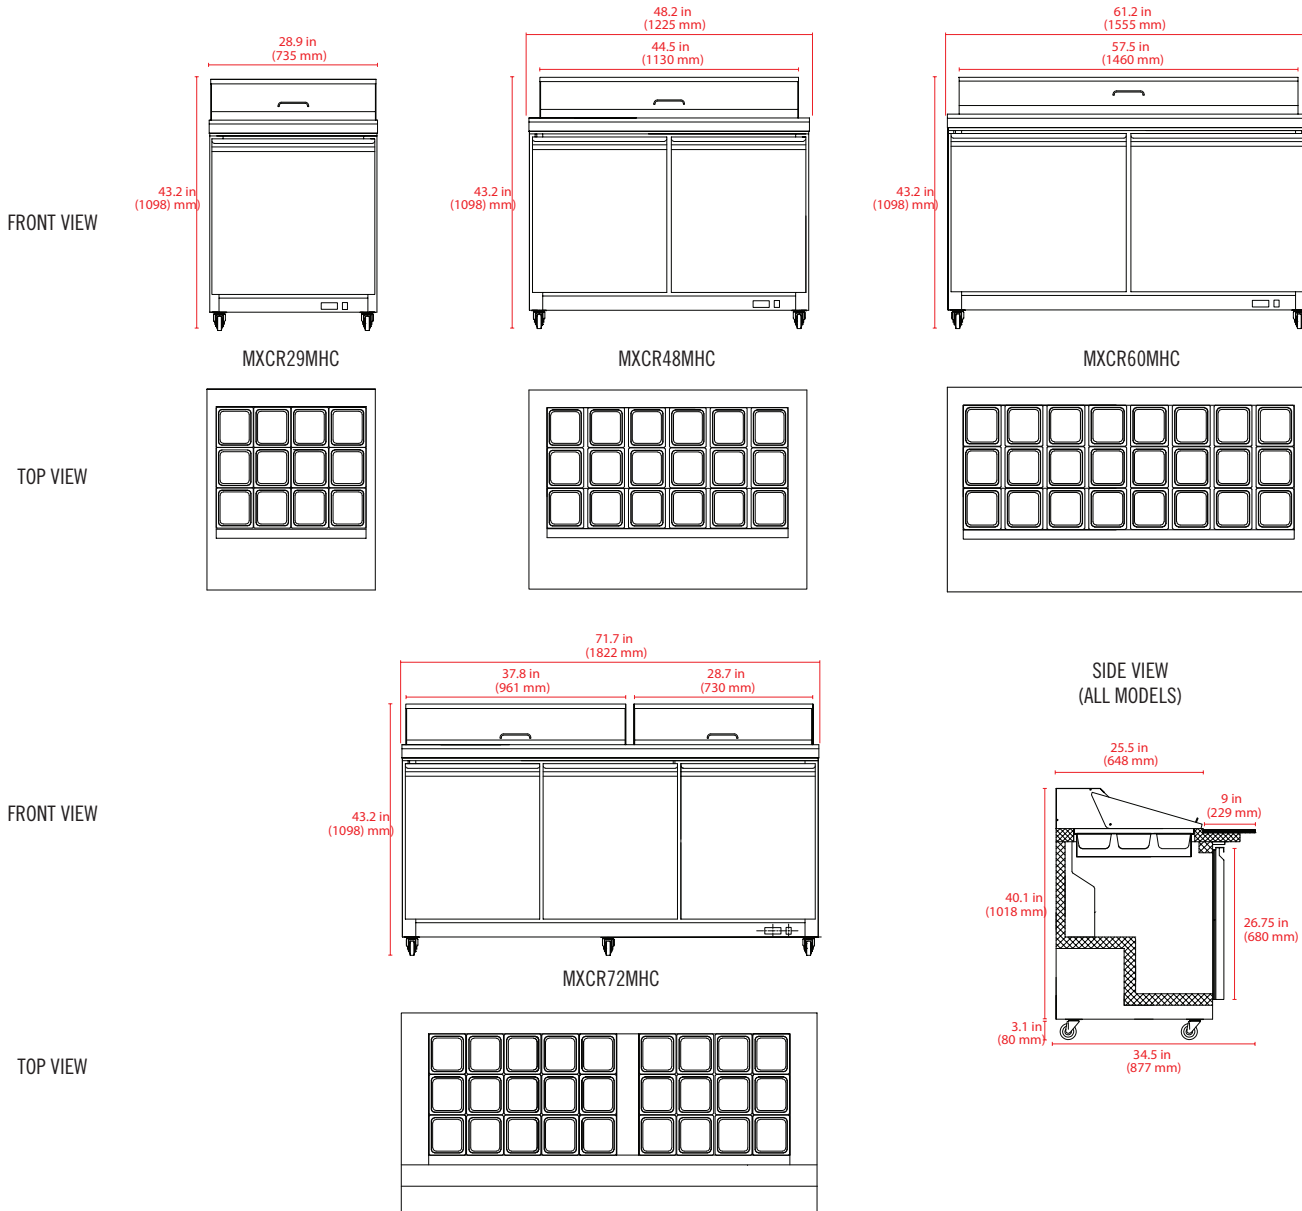

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NET CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	PANS (1/6)	ELECTRICAL
MXCR29MHC	28.9" x 34.5 x 43.2" (699 x 877 x 1098 mm)	22.9" x 18.8" x 24.5" (602 x 478 x 622 mm)	7 Cu Ft (198 L)	33°F to 41°F (1°C to 5°C)	3.0A	220 lbs (100 kg)	R290a 3.0 oz (85 g)	1 / 1	12	115V / 60Hz / 1Ph
MXCR48MHC	48.2" x 34.5 x 43.2" (1225 x 877 x 1098 mm)	43.5" x 18.8" x 24.5" (1104 x 478 x 622 mm)	12 Cu Ft (340 L)	33°F to 41°F (1°C to 5°C)	4.3A	304 lbs (140 kg)	R-290a 3.17 oz (90 g)	2 / 2	18	115V / 60Hz / 1Ph
MXCR60MHC	61.2" x 34.5 x 43.2" (1555 x 877 x 1098 mm)	56.2" x 18.8" x 24.5" (1428 x 478 x 622 mm)	15.5 Cu Ft (439 L)	33°F to 41°F (1°C to 5°C)	4.3A	352 lbs (160 kg)	R-290a 3.17 oz (90 g)	2 / 2	24	115V / 60Hz / 1Ph
MXCR72MHC	71.7" x 34.5 x 43.2" (1822 x 877 x 1098 mm)	66.9" x 18.8" x 24.5" (1700 x 478 x 622 mm)	18 Cu Ft (510 L)	33°F to 41°F (1°C to 5°C)	4.3A	430 lbs (195 kg)	R-290a 3.35 oz (95 g)	3 / 3	27	115V / 60Hz / 1Ph

INSTALLATION

- Shorter caster options are available to lower the overall height of the unit to satisfy ADA or other low profile requirements