

REACH-IN REFRIGERATORS

MODEL: MVR-23FDHC MVR-49FDHC MVR-72FDHC



MVR-23FDHC



MVR-49FDHC



MVR-72FDHC


Maxx Cold V-Series Reach-In Refrigerators store frequently accessed foodservice products within reach and at the proper storage temperature. The Reach-in Refrigerators are constructed of durable stainless steel, and include self-closing doors and an oversized refrigeration system to meet the needs of demanding applications.

FEATURES AND CONSTRUCTION

- Constructed of a durable, easy to clean stainless steel exterior and painted aluminum interior
- Self-closing, locking doors with easy to grip recessed handles
- Adjustable heavy-duty wire shelves (3 per section/door)
- Open door alert beeps when door has been open for 3 minutes
- Equipped with 4" swivel casters
- Digital control system
- LED temperature display
- Automatic defrost system
- Automatic interior lighting
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors

ELECTRIC

115V / 60Hz / 1Ph
 (230V / 50-60Hz / 1Ph is available as an option)
 8.2' (2m) NEMA 5-15P cord set included



NEMA 5-15P

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 7



Intertek

Certified to ANSI UL 471



Zero Ozone Depletion Potential



DOE 2018 Compliant

MAXX COLD WARRANTY (USA / CANADA)

1 Year Compressor Only Warranty; 6 Months Parts & Labor

For more information, contact:

TechnicalServices@TheLegacyCompanies.com or 877.368.2797

NOMINAL STORAGE CAPACITY

MVR-23FDHC..... 23 Cu Ft (651 L)


MVR-49FDHC..... 49 Cu Ft (1387 L)

MVR-72FDHC..... 72 Cu Ft (2039 L)

TEMPERATURE

Holding temperature 34°F to 41°F (1°C to 5°C)

- Efficient forced-air refrigeration system

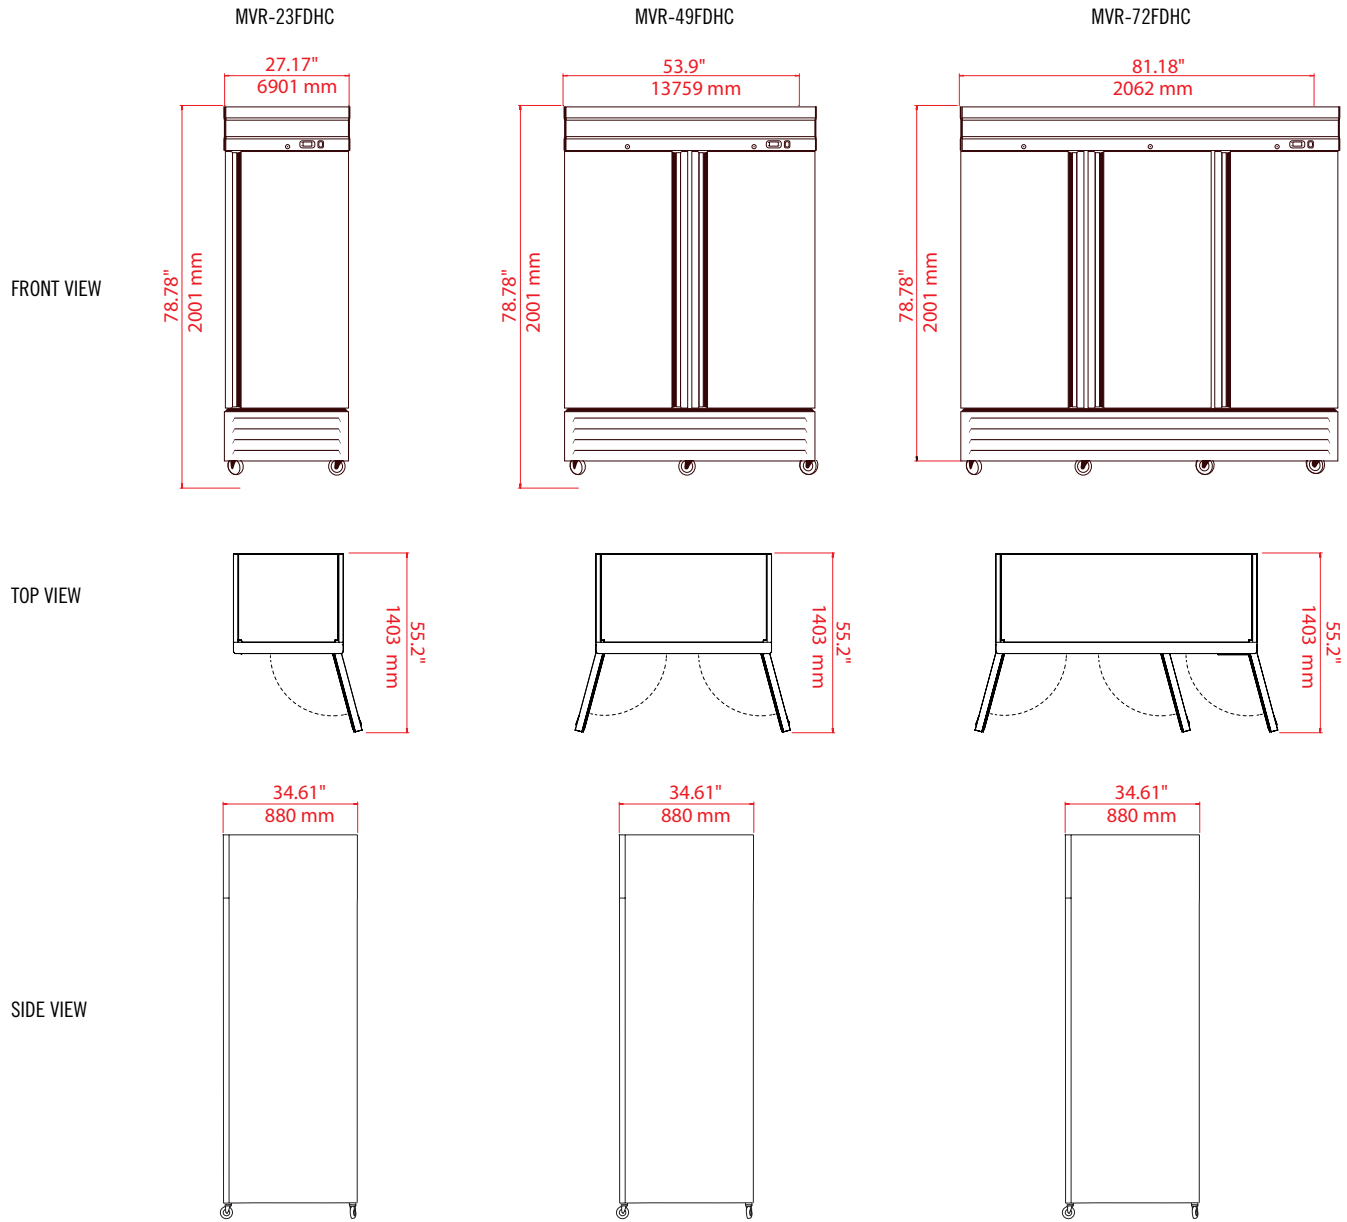

MODEL	EXTERNAL DIMENSIONS	INTERNAL DIMENSIONS	NOMINAL CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / SHELVES	ELECTRICAL
MVR-23FDHC	27.2" x 34.6" x 78.8" (691 x 879 x 2002 mm)	22.3" x 29.06" x 51.37" (566 x 738 x 1305 mm)	19 Cu Ft (538 L)	34°F to 40°F (1°C to 5°C)	2.2A	220 lbs (100 kg)	R-600A 1.76 oz (50 g)	1 / 3	115V / 60Hz / 1Ph
MVR-49FDHC	54.2" x 34.6" x 78.8" (1377 x 879 x 2002 mm)	49.3" x 29.06" x 51.37" (1252 x 738 x 1305 mm)	42 Cu Ft (1189 L)	34°F to 40°F (1°C to 5°C)	2.2A	342 lbs (155 kg)	R-290A 2.33 oz (66 g)	2 / 6	115V / 60Hz / 1Ph
MVR-72FDHC	81.2" x 34.6" x 78.8" (2062 x 879 x 2002 mm)	76.3" x 29.06" x 51.37" (1938 x 738 x 1305 mm)	65 Cu Ft (1841 L)	34°F to 40°F (1°C to 5°C)	2.2A	524 lbs (238 kg)	R-290A 3.0 oz (85 g)	3 / 9	220V / 60Hz / 1Ph

INSTALLATION

- Shorter caster options are available to lower the overall height of the unit