



Master Electric Convection Oven EasyTouch™ Screen Control

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- MCO-ES-10M
- MCO-ED-10M
- MCO-ES-20M
- MCO-ED-20M



Model MCO-ES-10M
Shown with optional casters

Standard Features

- EasyTouch™ screen design with simple on/off switch and intuitive Press and Go interface
- Master 4.3" Controller with 150°F (66°C) to 500° (260°C) temperature range
- Cook'n'Hold
- Direct spark with 100% safety shut off
- 2-speed fan control (high & low) with .6 HP fan motor
- Total of 10.4 kW loading per oven cavity
- Stainless steel front, sides, top, and legs
- 60/40 dependent door design with double pane thermal window in both doors and interior lighting
- Full Length, stainless steel positive door closure
- Patented "Safety Door System"
- Porcelain enameled oven interior with coved corners
- 24" cooking cavity height w/6 chrome plated oven racks on 13-position rack guides
- Double deck models available, suffix -20M
- Deep depth models available, prefix MCO-ED

Warranty


- 2 year limited part & 1 year labor warranty (USA & Canada only)
- 2 year limited part & labor warranty (USA Kindergarten to grade 12 schools only)
- 5 year limited door warranty, excluding window (USA & Canada only)

Options & Accessories

- Window in left hand door or Stainless steel solid door (specify) - No Charge
- Removable stainless steel drip pan
- Deck Fasteners
- Extra oven racks
- Swivel casters, (4) w/front brakes
- 4 Low profile casters, w/front brakes (double ovens only)
- Stainless steel open base with rack guides and shelf
- Direct connect vent
- Back enclosure (stainless steel)
- 460 volt, 3 phase (please specify)
- 50 cycle components
- Maximum security package available contact factory for details

Specifications

- Garland Master Full-Size Standard Depth, prefix MCO-ES or Deep Depth, prefix MCO-ED, electric convection oven.
- 10.4 kW/cavity, 0.6 HP fan motor with two speed fan control.
- EasyTouch™ screen.
- Porcelain enameled oven interior with coved corners, Six (6) oven racks and 13-position rack guides.
- Interior measures 29"(736mm) W x 24" (610mm) H x 24" (610mm) for standard depth and 29" (736mm) W x 24" (610mm) H x 28" (610mm) for deep depth.
- Stainless steel front, sides, top and legs. 60/40 dependent door design with double pane thermal window in both doors and interior lighting.
- Models with suffix 20M are double decked. Specify voltage and phase.
- UL, CUL and NSF Listed.




Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
7820
11/20



Master Electric Convection Oven EasyTouch™ Screen Control

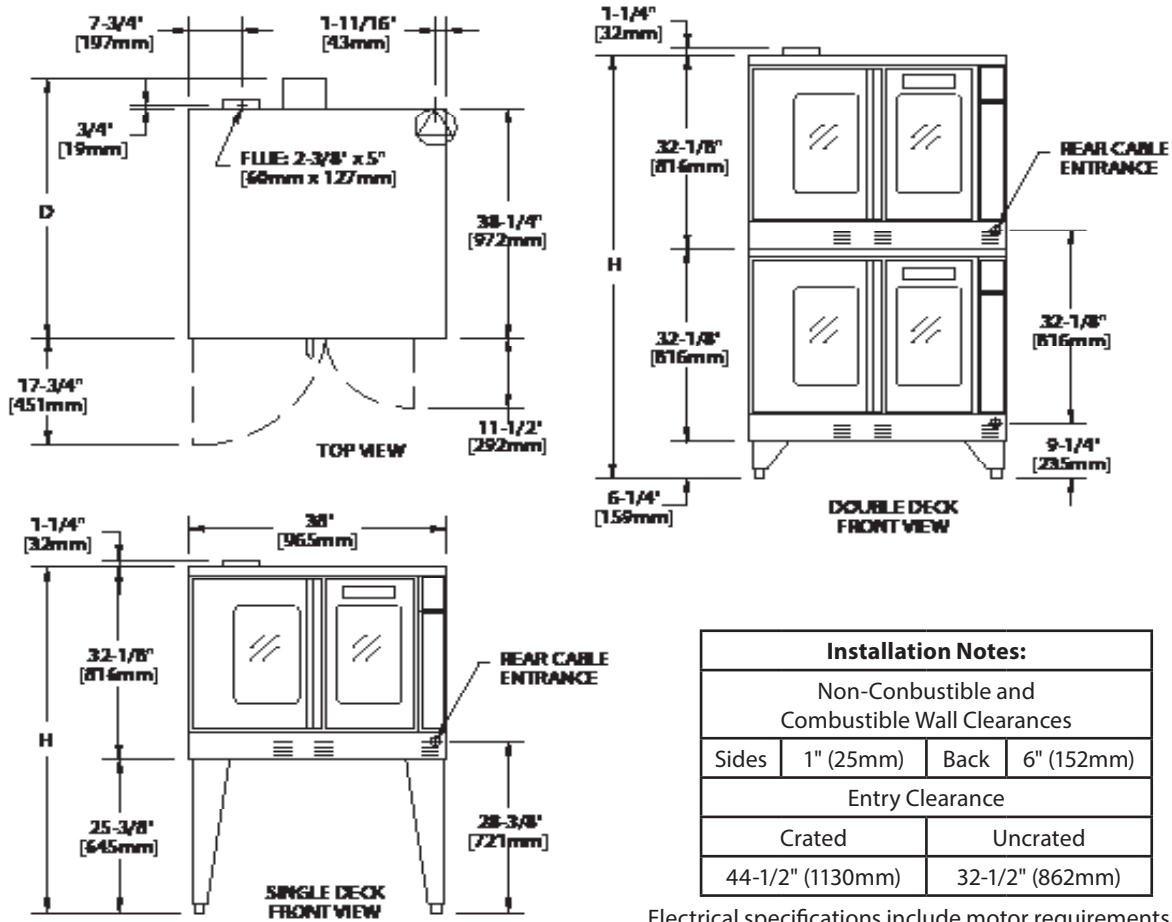

Installation Notes:			
Non-Combustible and Combustible Wall Clearances			
Sides	1" (25mm)	Back	6" (152mm)
Entry Clearance			
Crated		Uncrated	
44-1/2" (1130mm)		32-1/2" (862mm)	

Electrical specifications include motor requirements. 0.6 HP, 2 speed motor: 1670/1430 rpm, (60Hz); or 1120/930 rpm (50Hz). Please specify electrical characteristics when ordering

SINGLE-DECK MODELS	Interior Dimension (per oven)			Exterior Dimension			Ship Wt./Size	
	W:In(mm)	H:In(mm)	D:In(mm)	W:In(mm)	H:In(mm) *	D:In(mm)	Lbs./Kg	Cu Ft
Standard Depth	29(436)	24(610)	24(610)	38(965)	57-1/2(1416)	41-1/4(1048)	460/210	58.5
Deep Depth	29(436)	24(610)	28(711)	38(965)	57-1/2(1416)	44-1/2(1130)	530/240	58.5

DOUBLE-DECK MODELS	Interior Dimension (per oven)			Exterior Dimension			Ship Wt./Size	
	W:In(mm)	H:In(mm)	D:In(mm)	W:In(mm)	H:In(mm) *	D:In(mm)	Lbs./Kg	Cu Ft
Standard Depth	29(436)	24(610)	24(610)	38(965)	70-1/2(1791)	41-1/4(1048)	920/415	117
Deep Depth	29(436)	24(610)	28(711)	38(965)	70-1/2(1791)	44-1/2(1130)	1060/480	117

* Height with or without standard casters. Height with low profile casters (double deck) is 68-1/2" (1740mm).

MODELS**	Total kW	Nominal Amperes Per Line (includes 3/4 HP fan motor)													
		208v/1Ph		240V/1Ph			208V/3Ph			240V/3Ph			460V/3Ph		
		X	Y	X	Y	Z	X	Y	Z	X	Y	Z			
Standard Depth	10.4	50	43	30	30	28	26	26	24	14	14	13			
Deep Depth	10.4	50	43	30	30	28	26	26	24	14	14	13			

**NOTE: Double deck models with suffix - "20M" are provided with individual power supply connections

Welbilt reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
7820
11/20

