

## 741 SERIES SINGLE-FUNCTION TIMERS



*The next generation of timing systems is here. The 741 Series Single-Function Timers are designed to be easier to use, give you more flexibility and ensure utmost accuracy.*

Ideal for many kitchen applications, including monitoring frying, grilling and prep stations, and tracking coffee-making and employee handwashing. Quite simply, if a kitchen task needs to be timed or monitored, Prince Castle timers can help manage these tasks.

These simple-to-use timers countdown in hours and minutes, or minutes and seconds. Up and down scan buttons make each channel easy to program. Each channel is activated with a push of a button. A digital channel display shows the active channel.

LED channel indicators change colors during the timing cycle depending on the stage of the countdown: the light is green during the first 70% of the cycle, then turns yellow during the next 20% of the cycle, and finally turns red during the last 10% of the cycle. A dual tone volume alarm and flashing channel indicator alert the operator when timing is complete.


### FEATURES

- Digital channel display shows the active channel.
- New multi-colored LED channel indicators show the status of the timing cycle and provide early warning as the countdown expires.
- Lightweight ultra-slim 2.5 inch (6.4 cm) thick design and 6 foot (1.8 m) line cord allow these units to be mounted virtually anywhere.
- Each channel can be programmed independently, and all channels can be used simultaneously.
- The two-tone alarm is adjustable for either high or low sound levels.
- Includes menu labels to identify channels: Burgers, Steak, Chicken, Fish, Fries and blank stickers.
- Includes set of 3-1/2 inch (8.9 cm) mounting brackets. For increased mounting flexibility, flush mount brackets are available.
- One year warranty.
- Timers operate on any voltage worldwide.

### ORDERING INFORMATION

All timers are equipped with an I.E.C. connector. The appropriate I.E.C. cord set is also included to meet the electrical requirements for specific countries.

### CERTIFICATIONS

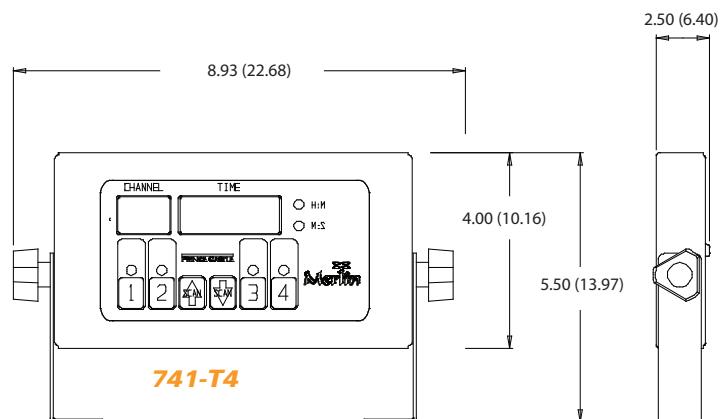

### DIMENSIONS

Model Number	Width in(cm)	Height in(cm)	Depth in(cm)	Shipping Weight lb(kg)	Shipping cu.ft (cu.m)
741-T4	8.93 (22.68)	4.00 (10.16)	2.50 (6.40)	4.00 (1.80)	.30 (.01)
741-T12	12.93 (32.84)	4.00 (10.16)	2.50 (6.40)	5.00 (2.30)	.32 (.01)

### ELECTRICAL INFORMATION

Model Number	Description	Volts	Hz	Watts	Amps
741-T4	4-Channel Single-Function Timer	100-240	50/60	10 max	.083 max
741-T12	12-Channel Single-Function Timer	100-240	50/60	10 max	.083 max

Designs and Specifications are subject to change without notice.