



**ATLAS METAL**

1135 N.W. 159th DRIVE, MIAMI, FLORIDA 33169

TEL 305.625.2451

TOLL FREE 800.762.7565

FAX 305.623.0475

WWW.ATLASFOODSERV.COM

SALES@ATLASFOODSERV.COM

Project: \_\_\_\_\_

Item No.: \_\_\_\_\_

Quantity: \_\_\_\_\_

**MODULAR UNITS INF SERIES**



**COLD FOOD UNIT**

**Solid Top with Refrigerated Base**

INFTR-4

INFTR-5

**SPECIFICATIONS**

**TOP:** Constructed of 16 gauge, type 304 stainless steel, die-formed, welded, ground and polished. The top is provided with an opening to receive the appropriately sized drop-in unit.

**BODY:** Frame construction shall be of hi-tensile stainless steel square tubing, 1-1/4" x 1-1/4". Frame sections are welded construction, ground and polished to a uniform finish. Body & panel is constructed from 18 gauge stainless steel with 1/16" thick plastic laminate Front & ends. rear aprons is constructed from 16 gauge stainless steel with 1/16" thick plastic laminate finish. Owner to specify finish. An integral locking device shall be provided to align and retain cart positioning when two or more carts are joined.

**REFRIGERATED BASE:** RB Series: Double wall constructed with a 20 gauge, type 304 stainless steel interior liner, with covered corners. Cart body forms the exterior of the base with an 18 gauge stainless steel fascia on operator's side. The unit is insulated with 1" of high density polystyrene on all sides. The interior is provided with a slide assembly to accommodate 12" x 20" pans. A 2-1/2" dial thermometer is mounted in the fascia. Doors are double wall constructed of 18 gauge, type 304 stainless steel, fully insulated with high density polyurethane and provided with edge mounted, chrome plated hinges and a slam action latch. Doors are complete with a moisture-proof gasket.

**REFRIGERATION SYSTEM:** The compressor housing is integral with the body of the unit. A fully self-contained condensing unit is provided, with a hermetically sealed compressor and a thermostat control. The system is provided with a forced air evaporator which drains into a condensate evaporator, pre-wired into the unit. The system is fully charged with CFC free refrigerant and ready to operate. Two (2 ea.) removable louvered access panels are provided.

**ELECTRICAL:** The unit will be wired for 15 amps., 120 volt, single phase operation with an on/off thermostat switch and pilot light. A 6' long, 3-wire cord and plug (NEMA 5-15P) will be provided.

**CASTERS:** The casters shall be 5" diameter, non-marking rubber tired, swivel type with ball bearings in both swivel and axle raceways, provided with grease fittings. Both casters on operator's side have toe activated brakes.

*Specifications subject to change without notice.*


**STANDARD FEATURES**

- Self-contained refrigeration system - just plug it in and turn it on
- Refrigerated base for back up storage
- Fully insulated for maximum efficiency and energy savings
- Positive self-locking device - keeps tops level and equipment in place
- Fully mobile - each unit is provided with 5" dia. swivel casters, two with brakes
- Versatile - available in a wide variety of finishes and colors
- 1-Year Parts & Labor Warranty
- UL Listed


**ACCESSORIES**

- **TS** - Tray Slide, 12" wide, S/S, solid, ribbed, fold-down
- **SH** - Work Shelf, 8" wide, S/S, fold-down
- **CB** - Work Shelf, 8" wide, hardwood maple, fold-down
- **CR** - Work Shelf, 8" wide, Richlite, fold-down
- **ES** - End Shelf, 16" wide, S/S, fold-down
- **CBE** - End Shelf, 16" wide, hardwood maple, fold-down
- **Sneeze Guards** - various styles available (see sneeze guard section of catalog)
- **RST** - Reinforced S/S Top
- **PCS** - 7 to 10 ft. Power Cord
- **CW** - Cord Wrap
- **P-CAST** - Polyurethane Casters, 2-W/Brakes
- **5YW** - 5-Year Compressor Warranty
- 18" x 26" Pan Rack, 3-1/2" O.C. (7 ea.) (available on INFTR-4 only)
- **\*220 Volt - 50 Cycle** Compressor
- **Solid SurfaceTop**


\* Units with these accessories are not currently UL listed.

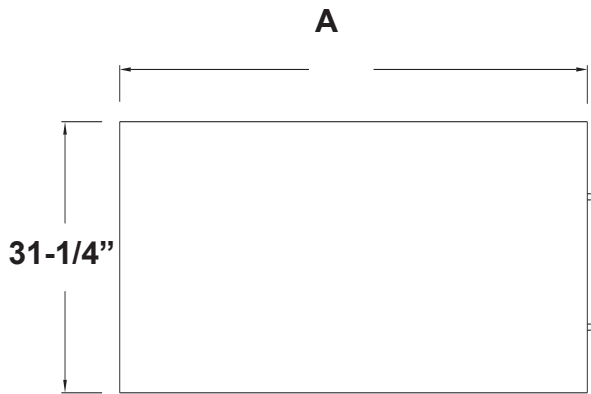

**PLAN VIEW**

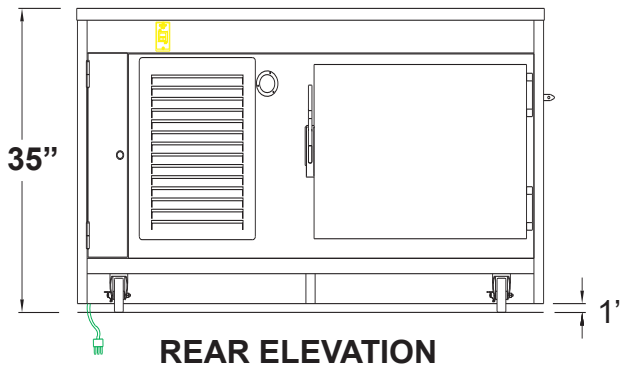

**REAR ELEVATION**

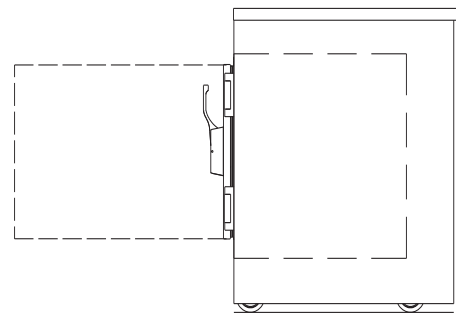

**END VIEW**

MODEL	"A"	REFRIGERATED BASE CAPACITY - 12" X 20" PANS	ELECTRICAL CHARACTERISTICS	SHIP WT. (lbs.)
INFTR-4	64" (161.9cm)	10 Pans - 1 Door - 8 cu. ft.	6.9 amps. - 120 V - 1/4 HP	546 (248kg)
INFTR-5	77-3/4" (196.8cm)	15 Pans - 2 Doors - 10 cu. ft.	6.9 amps. - 120 V - 1/4 HP	650 (295kg)