



Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

COMPACT INDOOR/OUTDOOR REFRIGERATORS

MODEL: MCR3U MCR3U-0



MCR3U



MCR3U-0


Maxx Ice Indoor/Outdoor refrigerators are ideal for residential and commercial environments. Perfect for any indoor or outdoor entertainment space, the stainless steel units can be free standing or built-in, has a field reversible door and storage capacity of up to 3 cubic ft.

FEATURES AND CONSTRUCTION

- Exterior finish is available in:
 - Black Painted Steel (MCR3U) for indoor use
 - Stainless Steel (MCR3U-0) for outdoor use
- Easy to clean, low-maintenance ABS interior
- Energy efficient LED lighting
- Field-reversible door and handle
- 4 metallic wire shelves
- Adjustable leveling feet
- Electronic control panel with LCD digital display
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Polyurethane foam insulation provides outstanding thermal regulation and energy efficiency
- Approved for residential & commercial applications

ELECTRIC

115V / 60Hz / 1Ph
(230V / 50-60Hz / 1Ph is available as an option)
6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 12



Intertek

Certified to ANSI UL 563



DOE 2018 Compliant

TEMPERATURE

Holding temperature 35°F to 40°F (1°C to 5°C)


- Digital control system maintains optimum temperature
- This unit is designed to store pre-chilled product at the ideal serving temperature and is not intended to perform as a pull down refrigerator

MAXX ICE WARRANTY (USA / CANADA)


Contact Maxx Ice for warranty statement at
TechnicalServices@TheLegacyCompanies.com or 877.368.2797




FRONT VIEW

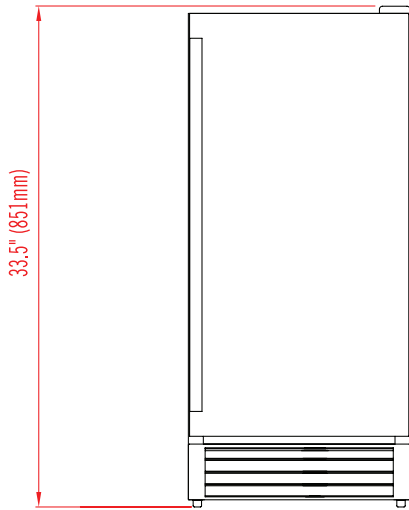

SIDE VIEW

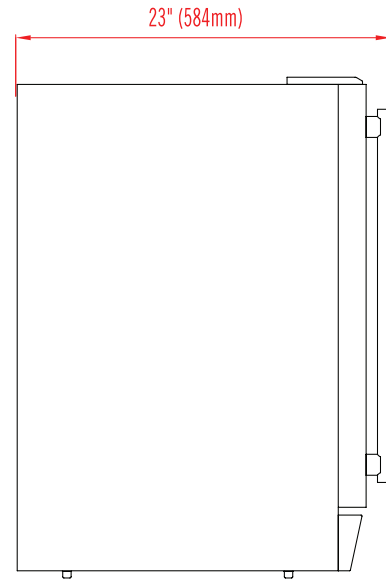

TOP VIEW

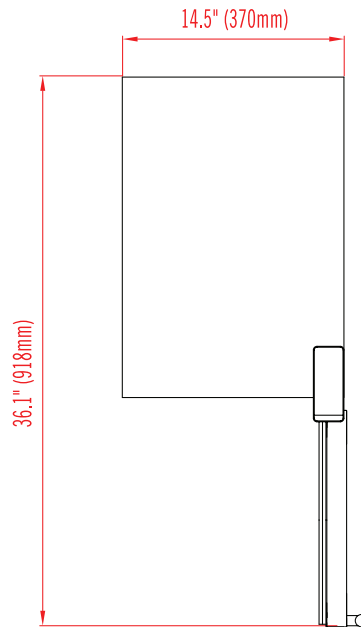

MODEL	EXTERNAL DIMENSIONS	HOLDING TEMPERATURE RANGE	AMP DRAW	DOORS / SHELVES	UNIT WEIGHT	REFRIGERANT AND CHARGE SIZE	ELECTRICAL
MCR3U	14.5" x 23" x 33.5" (368 x 584 x 851 mm)	35°F to 40°F (1°C to 5°C)	2.0A	1 / 4	77 lbs (35 kg)	R-134a 2.3 oz (65.2 g)	115V / 60Hz / 1Ph
MCR3U-0	14.5" x 23" x 33.5" (368 x 584 x 851 mm)	35°F to 40°F (1°C to 5°C)	2.0A	1 / 4	67 lb (30 kg)	R-134a 2.3 oz (65.2 g)	115V / 60Hz / 1Ph

INSTALLATION

- A minimum clearance of 1/4" on the sides, 1/2" in the rear and 1" on top is recommended to promote adequate cooling air circulation
- Minimum cutout size for undercounter installation is 15" x 33.75"