Mega-Top Refrigeration Tables with Drawers FMT D Series

FMT-27-12-D2-N FMT-48-18-D2-N FMT-60-24-D2-N FMT-72-30-D2-N FMT-48-18-D4-N FMT-60-24-D4-N FMT-72-30-D4-N FMT-72-30-D6-N

Standard Features

- Our "Next Generation" prep tables have been completely re-designed to ensure proper temperature even in 100 °F environments.
- Exclusive base design for over 30% greater interior capacity than most in it's class.
- Drawers: Heavy duty drawer slides with gentle self closing mechanism, full length recessed drawer handles; accomodates: 27" & 60" models (1) 12" x 20" x 4" deep pan per drawer / 48" x 72" models (1) 12" x 18" x 4" deep box or (1)-1/2 & (1)-1/3 pan (pans and box sold separately).
- Doors: Heavy duty stainless steel door with full length recessed door handles; interior step design for added insulation and protection of door gasket.
- With innovative and eco-friendly technology, Fagor utilizes R-290 Hydrocarbon designed to meet DOE's Energy Conservation standards with very low contribution to global warming (ODP-0) (GWP-3).
- Forced air design **underneath the pans** to keep products fresh and maintain temperature at 33° - 41 °F in food pans and cabinet interior. Split design with an aluminum divider wall between the food pans and the interior cabinet. Complies with NSF7 standards for food product safety.
- Insulated hood and lid skeeps pan temperature cold and minimizes condensation. 10" full length removable and reversible cutting board.
- Standard with full sets of-1/6 size pans, clear polycarbonate, 4" • deep.

Options & Accessories

- Flat cover in lieu of telescoping cover
- Epoxy coated shelves
- Pan dividers
- Single and double tier overshelf
- 220 Voltss / 50 cycles / 1 phase

Conforms to UL & NSF-7 standards



FMT-72-30-D2-N

Model		Doors	Drawers	Shelves	Top Pans	Capacity _{Cu. Ft.}	Amps	HP	Volts	Cabinet Dimensions W/D/H			Shipping (Wt. Cubes)	
၇ FMT-27-1: စ	2-D2-N	0	2	0	12	9.5	1.5	1/10	115	27-3/4"	36-1/8"	44-5/8"	245	36
© FMT-48-18 © FMT-48-18	8-D2-N	1	2	2	18	16.7	2.5	1/3	115	48-3/8"	36-1/8"	44-5/8"	347	36
FMT-48-1	8-D4-N	0	4	0	18	16.7	2.5	1/3	115	48-3/8"	36-1/8"	44-5/8"	367	55
о FMT-60-2	4-D2-N	1	2	2	24	20.6	2.5	1/3	115	60-3/8"	36-1/8"	44-5/8"	400	73
60 60 60 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	4-D4-N	0	4	0	24	20.6	2.5	1/3	115	60-3/8"	36-1/8"	44-5/8"	420	73
6 FMT-72-3	0-D2-N	2	2	4	30	25.4	2.5	1/3	115	72-1/2"	36-1/8"	44-5/8"	485	87
FMT-72-3	0-D4-N	1	4	2	30	25.4	2.5	1/3	115	72-1/2"	36-1/8"	44-5/8"	505	87
FMT-72-3	0-D6-N	0	6	0	30	25.4	2.5	1/3	115	72-1/2"	36-1/8"	44-5/8"	525	87
* Depth does not in	nclude 1" bump	er. ** Height does n	ot include 5" casters	(6" overall) or 6" opt	ional legs.									

13105 NW 47th Ave. Opa-Locka FL 33054 Tollfree: (866) 463 2467 Ph: (305) 779 0170 Fax: (305) 779 0173 info@fagorcommercial.com www.fagorcommercial.com





Item # __

MegaTop Refrigeration Table with Drawers FMT Series



Specifications

Construction

Heavy duty stainless steel exterior top, front and sides. Galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved corner floor. Aluminum split wall between the food pans and the interior cavity. Doors: heavy duty stainless steel exterior and interior, in-step design with hinged solid doors

and positive seal. Self closing mechanism and 120° stay open feature.

Drawers: heavy duty stainless steel with heavy duty drawer slides. Full extension drawers accommodate: 27" & 60" models (1) 12" x 20" x 4" deep pan per drawer / 48" x 72" models (1) 12" x 18" x 4" deep box or (1)-1/2 & (1)-1/3rd pan (pans and box sold separately).

Doors and Drawers: openings have a plastic breaker strips to retard condensate formation. Provided with magnetic door/drawer gaskets, removable without tools. Recessed full length handles.

Units come complete with a 2" Ecomate CFC. Free polyurethane insulation, foamed in place.

Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) R-290 refrigerant. Front breathing for built-in applications. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow. Tables are designed to maintain temperatures between 33 °F to 38 °F in the interior cabinet and 41 °F in the top rail.

Features

10" wide removable and reversible cutting board, NSF approved white polyethylene, 1/2" deep. Stainless steel insulated hood and top lid keeps pan contents colder.

Durable, long lasting and removable for easy cleaning. Comes standard with standard-1/6 size, clear polycarbonate, NSF approved 4" deep food pans and adaptor bars.

Shelving


(1) Epoxy coated shelving per door with clips. Adjustable in-1/2" increments per shelf.

Others

Unit is supplied standard with an 8' cord and plug (Nema 5-15p). Standard 5" diameter casters, front 2 with brakes.

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

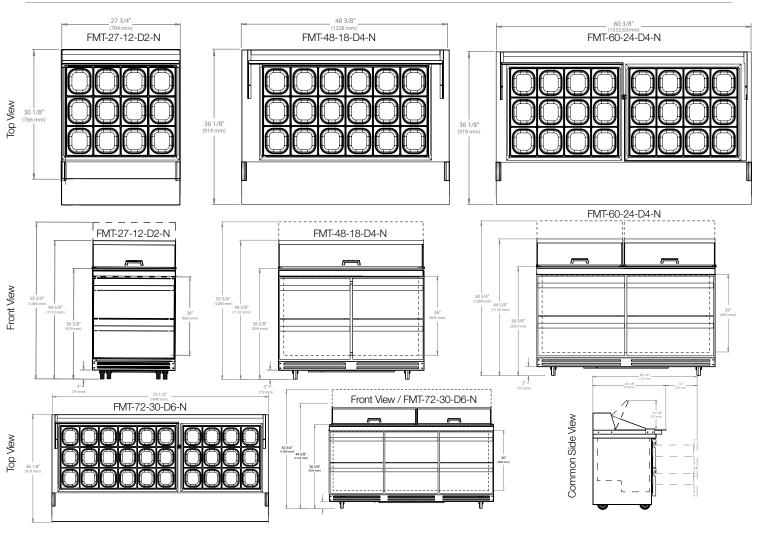

The manufacturer reserves the rights to modify materials and specifications without notice.

- 13105 NW 47th Ave. Opa-Locka FL 33054 Tollfree: (866) 463 2467 Ph: (305) 779 0170 Fax: (305) 779 0173
- IULY info@fagorcommercial.com
- www.fagorcommercial.com