



# MODELS C1300 / HC1300C

## Hot Water Dispensers

**APPLICATION:** Designed for large volume usage of steaming hot water. Up to 200°F (average) hot water per hour is provided by the system's 2/3-gallon tank. Saves time, work and water – heat only the water you use.

### FEATURES

- Foodservice grade heating element
- Swiveling gooseneck spout travels 90° to provide clearance for large vessels
- Easy-action lever with automatic shut-off for hot
- Dual cold lever (HC model) with optional filtration system
- Durable all brass faucet with polished chrome finish
- 2/3-gallon stainless steel tank construction for longer life
- Easy-to-adjust temperature control on front panel
- Mounts in standard sink opening or 1-3/8" drilled hole
- Tool-free tank connections and dry start protection for easy installation
- 1-year full-service limited warranty on parts and labor




### SPECIFICATIONS

<b>Capacity</b>	2/3-gallon tank dispenses up to 200°F (average) hot water
<b>Electrical</b>	115 Volts A.C., 1300 Watts, 11.3 amp heating element with 36" cord and grounded plug
<b>Thermostat</b>	Snap action, adjustable from 160°F to 210°F (factory pre-set at approximately 200°F)
<b>Insulation</b>	Meets U.L. 94HF-1 flammability specification
<b>Valve</b>	Instant, self-closing
<b>Recommended Supply Pressure</b>	25-80 psi
<b>Shipping Weight</b>	Approximately 11.5 lbs.

To ensure optimum performance, maximum distance between tank and base of faucet should be 14-1/2" or less.

### DIMENSIONS

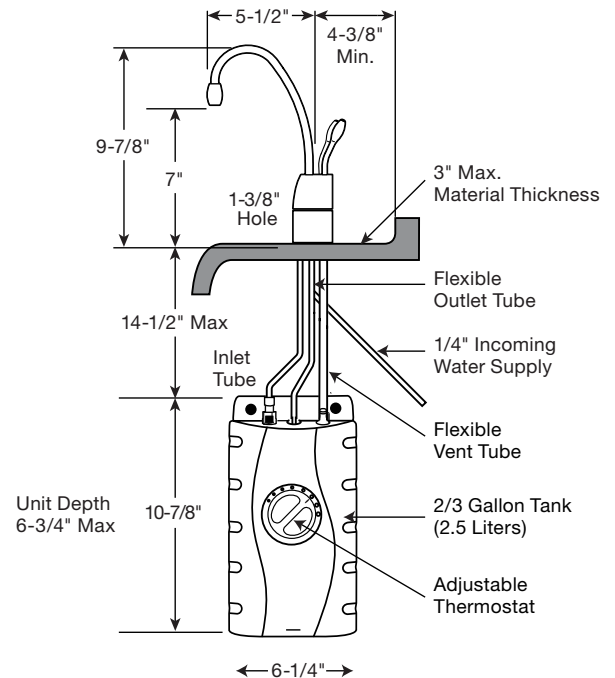

A complete collection of our product drawings is available for download at the **InSinkErator Revit/CAD Library**, which can be found at [www.insinkerator.com/foodservice](http://www.insinkerator.com/foodservice). Product information is also accessible on **The KCL CADalog**. More information is available from KCL at [www.kclcad.com](http://www.kclcad.com).



1250 International Drive  
Mount Pleasant, WI 53177  
TEL: 800-845-8345

[www.insinkerator.com/foodservice](http://www.insinkerator.com/foodservice)



InSinkErator® may make improvements and/or changes in the specification at any time, in its sole discretion, without notice or obligation and further reserves the right to change or discontinue models.