

HR15A 09/29/23 Item # 13507

WxDxH 14.8" x 25.75" x 31.5"

ADA Compliant 3





















Dimensions / Capacity	One Section HR15A
Interior Storage Capacity (CF) (AHAM)	2.54 ft ³
Overall Width x Depth (including handle)	14.8" x 25.75"
Height	31.5"
Depth with Door Open at 90°	37.25"
Adjustable Shelves	2
Shelf Dimensions (W x D)	(2) 10" x 20"
Crated Weight	115 lbs.
Crated Shipping Dimensions (LxWxH)	30.6" x 18.75" x 37"
Electrical / Refrigeration	One Section HR15A
Voltage	115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P 🐧
Voltage Range	104-127
Ambient Temp. Range	45° to 90°F
Control Setpoint Range	28° to 40°F
Amperage	0.9
Energy Consumption (kWh/day) @ASHRAE	0.54
Heat Rejection (BTU/Hr.) @NSF	145
Approx. Nominal Compres. BTU/HR (HP)	222 (1/10HP)
Refrigerant (charge amount, oz.)	R600a (0.53 oz.)

Options

Warranty

3 Year - parts and Labor on entire machine. 5 Year - Parts on Compressor Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Item #:_	
Project:	
Qty:	
AIA#:	

Features

- Stainless steel exterior front, sides and top with interior stainless steel
- UL approved for outdoor use
- Interior LED lighting
- · Field reversible door with lock
- Magnetic door gasket is easily removable for cleaning
- Stainless steel door with stay open feature
- · Environmentally friendly insulation
- Electronic controls with LED temperature display
- · Automatic time-initiated defrost
- (2) Stainless steel adjustable 1.41" shelves that slide out
- Four adjustable legs up to 1"
- 9 ft. cord and 5-15P NEMA plug


Shelf Capacity: (18) 20oz. Bottles


Front breathing. Ventilation is required from the bottom front of the appliance. Keep this area open and clear of obstructions. Adjacent cabinets and counter tops can be installed around the appliance as long as the front grille remains

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle



FRONT VIEW SIDE VIEW

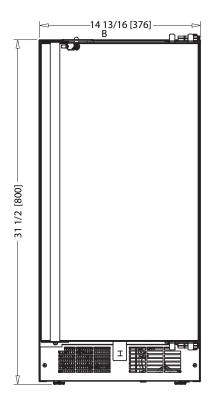

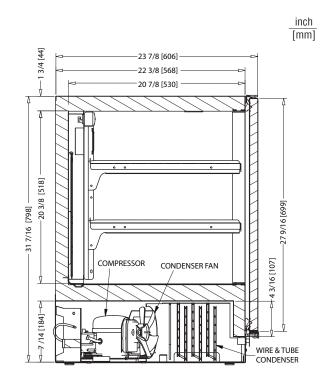

PLAN VIEW

