ICB SH-DV, Stainless 120/208-240V

32.8" x 23.4" x 11.8" (83.3cm x 59.4cm x 30.0cm)



- Sleek modernized design language, with rounded angles on the corners and trunk
- Digital readout displays in English, Spanish, or French ---for easier programming and control--- and can show either 'Standard' or Metric measurements. Digital readout also shows machine status, and targeted advertising messages can be programmed for display.
- BUNN Infusion Series technology allows for multiple recipes from one footprint --- with three brew buttons and three batch sizes
- Energy-saver mode reduces tank temperature during idle periods
- Exclusive Peak Extraction™ Sprayhead is multi-directional with a 17-hole design to ensure ultimate uniformity of extraction
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- USB programming capable
- Brew counter keeps track of how many batches are brewed
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.
- New Soft Heat® servers [sold separately] are ergonomic, lighter weight, energy efficient and now offer programmable recipe/batch based holding times and temperatures, alerting staff when freshness has expired or server is empty
- Dual voltage adaptable (Can operate at 120V/15 amp or 120/208-240V/20 amp)

Agency:

Legs: 4" Satin Nickel Legs





Specifications

Product #: 51100.0103 Faucet: Side

Water Access: Plumbed

Interface: Wireless
Finish: Stainless/Grey
Funnel: Black Plastic

Additional Features

BrewWISE

Electrical & Capacity

Volts	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120	15.0	1800	Yes	NEMA 5-20P	82	60°F (15.5°C)	1	2	60
120/208	14	2900	-	N/A	136	60°F (15.5°C)	1	3	60
120/240	17	4050	-	N/A	181	60°F (15.5°C)	1	3	60

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	
20-90	138-621	3/8" Male Flare Fitting	1.00	

For most current specifications and other info visit bunn.com.


CAD Drawings


2D	Revit	KLC
•		




BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Created on: 01/23/2019



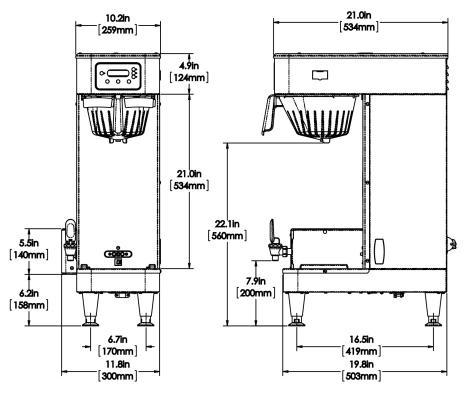



Unit				Shipping				
	Width Height Depth		Width	Height	Depth Weight		Volume	
English	11.8 in.	32.8 in.	23.4 in.	29.0 in.	29.0 in.	16.0 in.	47.500 lbs	7.787 ft ³
Metric	30.0 cm	83.3 cm	59.4 cm	73.7 cm	73.7 cm	40.6 cm	21.546 kgs	0.221 m³



Related Products & Accessories: ICB SH-DV, Stainless 120/208-240V(51100.0103)



FILTERS, GOURMET 500 500/1 50/CL

Product #: 20138.1000



1SH STAND, 120V INF SERIES

Product #: 27825.0200



2SH STAND, 120V INF SERIES

Product #: 27875.0200





WATER FILTER, EQHP-10

Product #: 39000.0004



KIT, DRIP TRAY INF TWIN SH

Product #: 53452.0000





Serving & Holding Options: ICB SH-DV, Stainless 120/208-240V(51100.0103)



