



# SERVING STATIONS

## SERVING LINE BREATH GUARD BENT MODELS RSB-DTSSFF

Designer series bent-corner breath guard: Double-tier, Single-sided, Non-adjustable front. Designed for full-service applications (bottom tier), self-service (top tier)

**SHORT FORM SPEC:** Randell designer series breath guard with bent corners. Double-tier, single sided, non-adjustable design for full service. Framework is constructed of 1" diameter stainless steel tubing with #4 "satin" finish. All glass panels shall be tempered with 1" radius corners and polished edges. Front and top panels utilize 3/8" thickness, end panels utilize 1/4" thickness. Provided with 3" x 1.25" surface mount flanges.

**AVAILABLE MODELS:**

- RSB-DTSSFF-24
- RSB-DTSSFF-30
- RSB-DTSSFF-36
- RSB-DTSSFF-48
- RSB-DTSSFF-60
- RSB-DTSSFF-72
- RSB-DTSSFF-86

**NSF LISTED FINISH:**

- Stainless steel #4 finish
- Other finishes available (contact factory)

**GLASS:**

- Standard side glass is 1/4" tempered
- Standard top and front glass is 3/8" tempered (additional leg set required after reaching 66" maximum top glass length)

**ORIGIN OF MANUFACTURE:**

Designed and manufactured in the United States.

**BREATH GUARD LENGTH GUIDE:**

Unit Length	Center Line Length	Overall Length
24"	21.25"	23.75"
30"	27.25"	29.75"
36"	33.25"	35.75"
48"	45.25"	47.75"
60"	57.25"	59.75"
72"	69.25"	71.75"
86"	83.25"	85.75"



PROJECT NAME:	
LOCATION:	
ITEM NO:	
QTY:	
MODEL NO:	
AIA NO:	
SIS NO:	
CSI SECTION:	11400





**OPTIONS/ACCESSORIES:**

- LED lighting
- Heatlamp
- Combination: LED lighting and heatlamp
- Dimension modification (Consult factory)
- Alternative tubing finish (Consult factory)

**ADDITIONAL RESOURCES:**

- [Request A Quote](#)
- [Sales Tools](#)
- [Find A Rep](#)

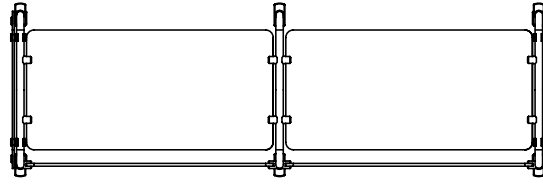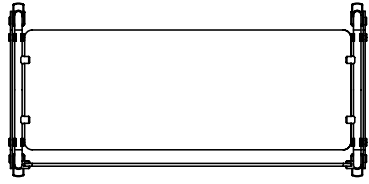

RSB-DTSSFF-48

RSB-DTSSFF-72

RSB-DTSSFF

