

COMMERCIAL

Refrigeration Equipment 3-Door Full Height Freezer 81 " Long



738246 (KCHRI81R3DF)

3-Door Full Height Freezer 81 " Long

Short Form Specification

<u>Item No.</u>

3 full door freezer with exterior top, back, and bottom panels in galvanized steel, exterior side panels in 430 stainless steel; interior back, side, top and bottom panels in 304 stainless steel. Control with cabinet temperature display. Self-closing and on-site reversible door feature with lock and key.

R290 gas in the refrigeration circuit.

- ETL Safety and Sanitation certifications.
- 3/5 Years warranty.

ITEM #
MODEL #
NAME #
SIS #
AIA #

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Bottom mounted cooling unit slides out for easy access and cleaning.

Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Sustainability

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Interior LED light to save energy and for best internal visibility.

Optional Accessories


- 1 ADJUSTABLE FOOT PNC 206445
- Shelf for 54" and 81" (left/right) PNC 880591 Reach-In (Solid Door)
- Middle Shelf for 81" Reach-Ins PNC 880592
- Shelf clips (4-pack) PNC 880611
- Sheet Pan Rack Fits KCHRI Models PNC 880622 🗅

APPROVAL:





Refrigeration Equipment 3-Door Full Height Freezer 81 " Long

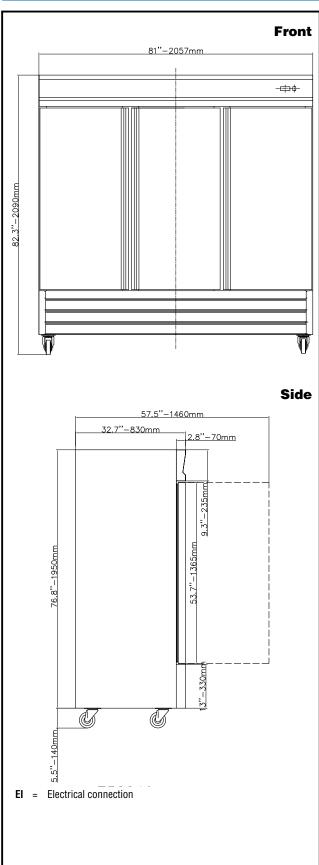

.

125/250 NEMA-L14-20P

Æb

Intertek

(E)|

Intertek

Electric

Electric	
Supply voltage: 738246 (KCHRI81R3DF) Electrical power, max: Plug type:	115 V/1 ph/60 Hz 1 kW USA NEMA L14-20P
Capacity:	
Gross capacity:	72 cu.feet
Key Information:	
Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Number and type of doors: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Number and type of grids (included): Type of external material: Type of internal material: Warranty: Approvals	1 Left+2 Right 81 " (2057 mm) 32 11/16" (830 mm) 82 1/4" (2090 mm) 3 Full 27 1/2" / (698.5 mm) 50 3/16" / (1275.08 mm) 76 3/8" / (1940.56 mm) 84 5/8" (2150 mm) 809 lbs (367 kg) 139.55 ft ³ (3.95 m ³) 9 - Coated Steel Stainless Steel 304 AISI 3 / 5 years ETL C&USETL SANITATION
Refrigeration Data	
Compressor power: Operating temperature min.: Operating temperature max.: Condenser type: Defrost type:	1 ½ hp -10.01 °F 0 °F Fin & tube Auto Defrost
Sustainability	
Current consumption: Refrigerant type: GWP Index: Refrigerant weight:	9 Amps R290 3 150 g

Refrigeration Equipment 3-Door Full Height Freezer 81" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.