

# WORKTOP FREEZER (0°F)

**Model: SWF32N-FB**  
Natural Refrigerant R-290 Model

**32" Worktop Freezer with Solid Door Front Breathing**

Stainless steel front, top and end panels, aluminum back and interior.



## Options and Accessories

(upcharge and lead times may apply)

Stainless steel interior	Door locks
Stainless steel back	Drawers in lieu of door (consult factory)**
Additional epoxy coated steel shelves	Special electrical requirements (consult factory)
Stainless steel shelves	
Overshelves (single or double)	

\*\*Two tier: (1) 12 x 20 x 6 pan per drawer  
or (1) 1/2 x 6 AND (2) 1/3 x 6 pans per drawer

Consult factory for other model configurations, options and accessories.



**Project Name:** \_\_\_\_\_

**Model Specified:** \_\_\_\_\_

**Location:** \_\_\_\_\_

**Item No:** \_\_\_\_\_ **Quantity:** \_\_\_\_\_

**AIA #:** \_\_\_\_\_ **SIS #:** \_\_\_\_\_

## Standard Model Features

- REFRIGERATION SYSTEM**
- Performance rated refrigeration system
  - Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>
  - Automatic, hot gas condensate evaporator
  - Non-corrosive, plasticized fin evaporator coil
  - Easily serviceable, back mounted compressor

- CABINET ARCHITECTURE**
- 2" non-CFC polyurethane foam insulation
  - Smooth, polished chrome door handle
  - Spring loaded, self closing door
  - Magnetic snap in Santoprene™ door gasket
  - Heavy duty, epoxy coated steel shelf
  - Completely enclosed, vented and removable case back
  - 3 3/4" casters

- MODEL FEATURES**
- Electronic control, automatic electric defrost
  - Field rehingeable door

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space.

**APPROVAL:** \_\_\_\_\_

# Model Specifications

## DIMENSIONAL DATA

Net Capacity (cubic feet)	9.0 (253 cu l)
Width, Overall (inches)	32 (813 mm)
Depth, Overall (inches) (including handle & bumpers)	32 3/16 (818 mm)
Height, Overall (inches) (including 3 3/4" casters)	34 (864 mm)
Shelf Area (square feet)	3.9 (0.4 sq m)
Number of Shelves	1
Number of Doors	1
Interior Depth (inches)	See Drawing
Interior Height (inches)	26 1/4 (667 mm)
Interior Width (inches)	28 (711 mm)

## REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/3
Capacity (BTU per hour)*	1800

## ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Total Amps (International)	5.6 (3.6)
Defrost Amps (International)	4.8 (2.4)
10 ft. Cord/Plug [attached] (International)	Yes (No)

## SHIPPING DATA



Weight (pounds)	234 (107 kg)
Height - Crated (inches)	42 (1067 mm)
Width - Crated (inches)	40 (1016 mm)
Depth - Crated (inches)	37 1/4 (946 mm)

\* Rating @ -15°F evaporator, 90°F ambient  
 Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
 (varies by country)

# Model Plan Views

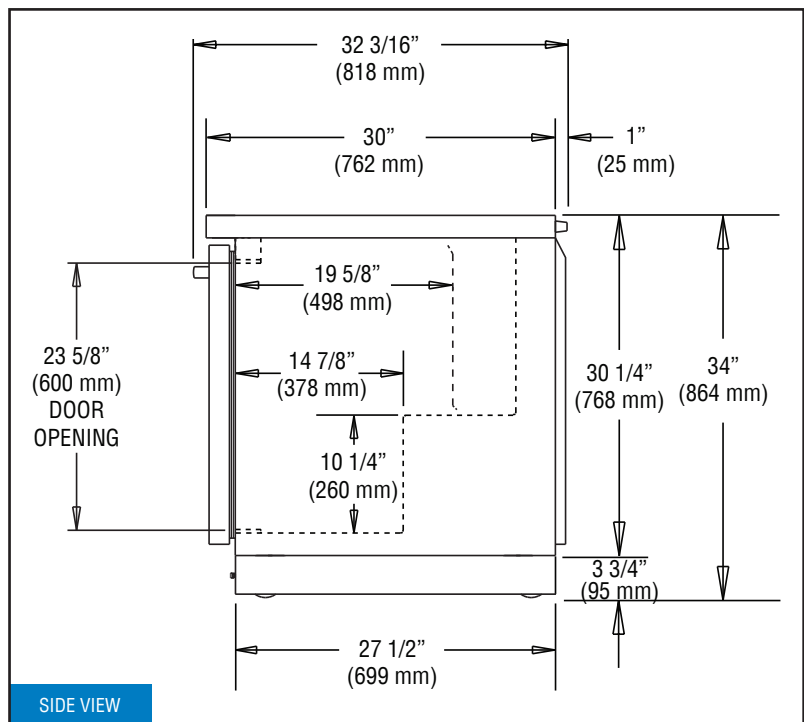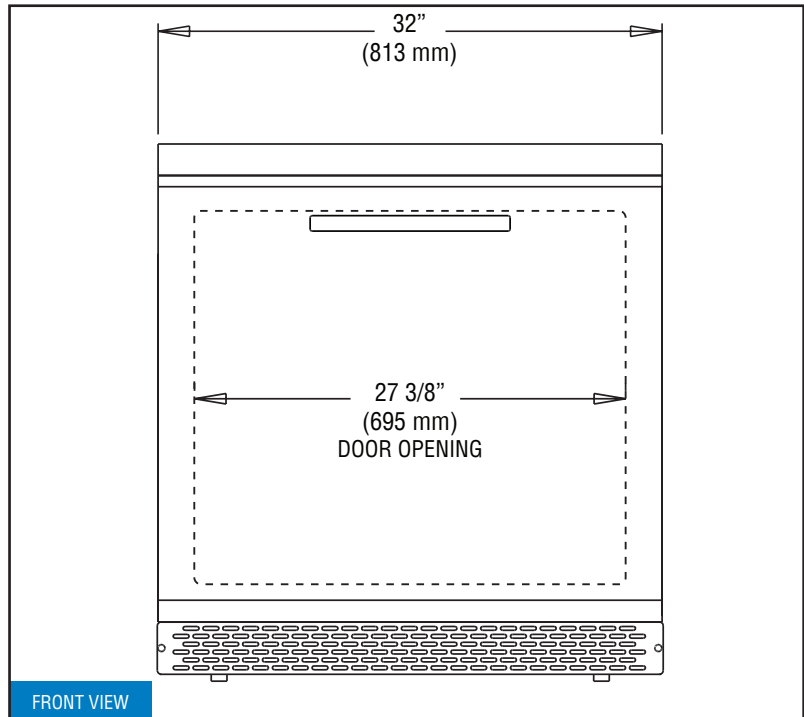

**NOTE:** For proper operation, the area under and in front of the cabinet **must** not be obstructed in any way.

**Continental**  
 Refrigerator

Toll-Free: 800-523-7138  
 Phone: 215-244-1400  
 Fax: 215-244-9579

539 Dunksferry Road  
 Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



PROUDLY  
 DESIGNED & ASSEMBLED  
 IN THE U.S.A.

Intertek

© Copyright 2021. Continental Refrigerator.  
 A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 4/3/24