

### **Your Solutions Partner**

# **Specifications**

F.O.B. Sedalia, Missouri 65301



(Shown with optional casters)

## **OPTIONS:**

- Stainless steel interior
- ☐ Stainless steel back enclosure panel
- Seismic feet
- ☐ 48" flexible disconnect, w/restraining device
- Down draft hood
- Common gas manifold
- Double stack shipped assembled
- ☐ Flue deflector
- Casters
- Extra deep oven racks
- ☐ Prison package tamper proof screws, lexan hinged cover with lockable clasp
- Extended warranty

DUKE MANUFACTURING CO. 2305 N. Broadway St. Louis, MO 63102 800.735.3853 Toll Free 314.231.5074 Fax www.dukemfg.com SS-1081 613Q-G4 Double-Deep-Gas

Approval Stamp(s):
PRODUCT INFORMATION: PROJECT:
TEM:
QUANTITY:
MODEL:
Duke Convection Ovens - "Q" Series Double Deck - Deep Depth - Gas
■ 613Q-G4 Double deck, deep depth
STANDARD FEATURES
■ 6 racks/13 rack positions
<ul><li>Porcelain interior finish</li></ul>
■ 50/50 independent stainless steel doors
<ul><li>Double pane glass both doors</li></ul>
<ul> <li>8" angular stainless steel legs/adjustable fee</li> </ul>
■ 2 Speed motor
OVEN SECTION
Stainless steel front, sides and top
<ul> <li>1 ½" insulation on bottom, sides and back</li> <li>3" insulation on top</li> </ul>

- back
- Interior lights

### **BURNER SYSTEM**

- 46,000 BTU on each oven
- High output atmospheric burner system
- Main gas shut off valve
- Built-in gas regulator

### **OVEN CONTROLS**

- ☐ "V" Basic snap action thermostat (200°-500°F), 60 minute electric dial timer with continuous sound buzzer, 2-speed fan
- ☐ "XX" Solid state digital time and temperature controls, 12-hour countdown timer, Cook and Hold feature, 2-speed fan, Pulse fan capability


Certifications








Specification subject to change



# **DUKE CONVECTION OVENS** "Q" SERIES

**DOUBLE DECK - GAS - DEEP DEPTH** 




Gas Specifications								
613Q-G4	BTU/Hour	46,000						
Regulated gas pressure required 3.5"WC natural /10" WC propane								
Combustible surface clearance - 1" side, 1" rear, 6" floor								
Gas connection								
3/4" Gas connection								

Electrical requirements: 3.5 Amps/ 115V

Standard 115V units supplied with 5' cord and plug

Specify gas type

Specify altitude over 2000 feet

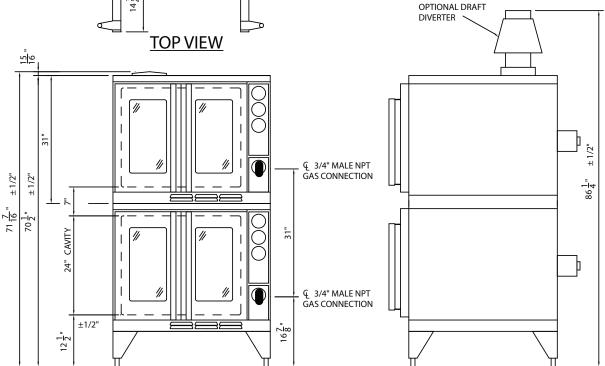

# **FRONT VIEW**

# **RIGHT SIDE VIEW**

Freight Class: 85

### **DIMENSIONS:**

Model	Height		Width		Depth		Cube ft.	Weight	
	in.	cm	in.	cm	in.	cm	crated	lbs.	kg
613Q-G4	43.5	110.5	38	96.5	70.5	179.1	76.5	1080	490.0



### **Duke Manufacturing Co.**

2305 N. Broadway St. Louis, MO 63102 Phone: 314-231-1130 Toll Free: 1-800-735-3853 Fax: 314-231-5074

www.dukemfg.com