

- **BN37R** 35-5/8"L x 26-1/4"D x 82-1/4"H
- **BN47R** 47-5/8"L x 26-1/4"D x 82-1/4"H
- **BN57R** 59-5/8"L x 26-1/4"D x 82-1/4"H

Included

- Casters (non-locking) w/ levelers
- Condensate pan
- E-Coated evaporator coil
- Hydrocarbon refrigerant (R290)
- Magnetic air filter
- One piece formed ABS plastic tub
- One year parts & labor; 5 year compressor warranty
- Rear wall spacer (removable to fit through door opening)
- Top light (LED 4000K)
- Warmest average product temperature of 40°F or less




BN47R

| Specify | Standard Features | Additional Options |
|--------------------------------|---|--|
| EXTERIOR COLOR | • Powder coated Silversan Black | • Laminate (stock/non-stock colors) • Powder coated (stock/non-stock colors) • Stainless steel |
| INTERIOR COLOR | • Powder coated Silversan Black | • Stainless steel |
| LOWER FRONT PANEL COLOR | • Powder coated Silversan Black | • Stainless steel (must choose stainless exterior) |
| REAR EXTERIOR COLOR | • Powder coated Silversan Black | • Stainless steel |
| BASE SUPPORT | • Casters (non-locking) w/ levelers | |
| END PANELS | • Full w/stainless steel mirror interior | • Cutaway w/ glass • None (synchronized defrost required) |
| VINYL GRAPHICS | • None | • Full wrap graphic set • Logo graphic only |
| COVER/CURTAIN | • None | ¹ • Night curtain, retractable, non-locking • Removable solid security cover, locking |
| PRICE TAG MOLDING | • None | • Universal price tag molding (clear w/ open top) |
| REAR DOORS | • None (solid back panel) | • Rear loading hinged doors, locking |
| SHELVING | • Metal shelves (4), non-lighted | • Metal shelves (4), lighted (LED 4000K) |
| ELECTRICAL CONNECTION | • 6' Straight blade power cord | • 6' Locking power cord ² • Breeze (Type-I) self-contained refrigeration, required with BN37R 120V |
| REFRIGERATION | • Breeze~E (Type-II) self-contained refrigeration | ³ • 6' Straight blade 120V power cord, required with BN37R 120V |
| THERMOMETER | • Spirit filled thermometer | |
| MISCELLANEOUS | | • Second year parts & labor warranty (excludes compressor) |


Option Notes: 1 - One cover/curtain type per model
2 - BN37R only
3 - BN37R only

| | | |
|--|---|----------------------------------|
| Intended Environment: Type II - Designed to operate in ambient conditions of 80°F and 55% relative humidity unless noted otherwise in system information below. | | |
| Zone | Intended Product To Be Displayed | Warmest Avg Prod Temp ° F |
| 1 | Packaged refrigerated products | 40 |

PLAN VIEW

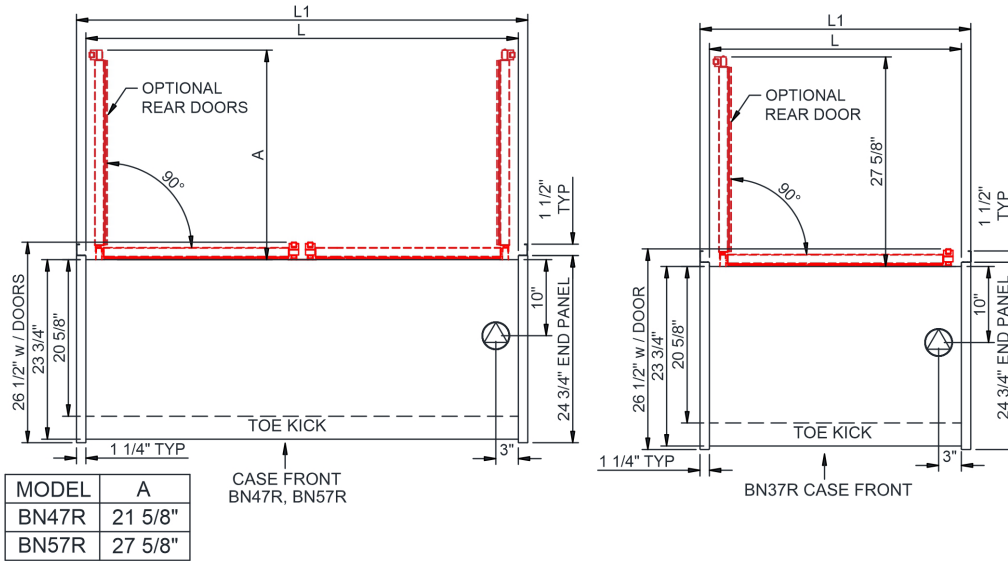

SIDE VIEW

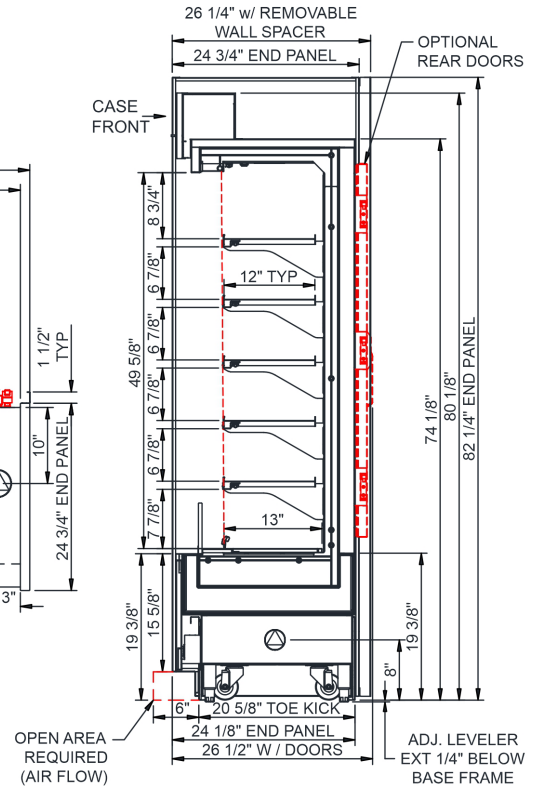

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- REFRIGERATION LINE CONNECTION.
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

| Model Technical Specifications | | | | | | | | | | | | | | | | | |
|--------------------------------|-------|-------|-----|-----------------------|------------|---------|---|-----|-------|----------|-------|-----------------|-----------|-----|-----------------|-----------------|--------|
| Model | L" | L1" | L2" | System Circuit Volts | | | | Phs | Freq | Amps *** | Watts | Wires | NEMA Plug | SST | Conv. Rack RTU# | Para. Rack RTU# | Est Wt |
| | | | | Self-Contained (R290) | Circuit #1 | 208-240 | 1 | | | | | | | | | | |
| BN37R | 33.13 | 35.63 | .00 | Self-Contained (R290) | Circuit #1 | 208-240 | 1 | 60 | 10.99 | 1,812 | 2+G | 6-15P or L6-15P | N/A | N/A | N/A | 800 | |
| | | | | Self-Contained (R290) | Circuit #1 | 110-120 | 1 | 60 | 15.14 | 1,077 | 2+G | 5-20P or L5-20P | N/A | N/A | N/A | | |
| BN47R | 45.13 | 47.63 | .00 | Self-Contained (R290) | Circuit #1 | 208-240 | 1 | 60 | 16.00 | 2,824 | 2+G | 6-20P or L6-20P | N/A | N/A | N/A | 900 | |
| BN57R | 57.13 | 59.63 | .00 | Self-Contained (R290) | Circuit #1 | 208-240 | 1 | 60 | 16.00 | 2,849 | 2+G | 6-20P or L6-20P | N/A | N/A | N/A | 1,000 | |

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models
 Accordance with AHRI Std 1200
 ETL Listed to UL 471 & UL 60335-2-89
 ETL Listed to CAN/CSA 22.2 No. 120
 ETL Sanitation to NSF/ANSI 7



Important Notes:

- Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- Levelers must be adjusted during installation to ensure unit is level and plumb.
- Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
- Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).
- End panels must be tightly joined or kept at least 6" away from any structure to prevent condensation.
- Tile floors, low ceilings, or small rooms will increase noise level.
- Compressor air intake at lower front, discharge from lower rear. Lower panels cannot be blocked. Wall spacers required for proper air flow.
- If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.