

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

## Drop-In Rinser Faucet

<b>DI-RF</b>	DI-RF7, DI-RF12, DI-RF18, DI-RF24
--------------	-----------------------------------

### Standard Features

- All stainless steel construction
- Pan includes radius interior corners for easy cleaning
- Drain is a 1/2" welded tailpiece that exits from the bottom of the unit
- Drain pan includes 1/2" flange
- Installation kit includes: 10' of clear vinyl drain tube, five - 4" Ty-wraps, and two - 1/2" plastic elbows

### Installation

- Notes:**
- Important: Unit must be installed in conformance with applicable federal, state, and local plumbing codes, including adequate backflow when required.
  - Must install backflow prevention device conforming to ANSI/ASSE 1022 or ANSI/ASSE 1024 to meet plumbing code (not included).
  - Install in-line water regulator (included).
  - A separate shut-off valve is recommended (not included).
- Instructions:**
1. Make a cut-out in work surface using cut-out dimensions (located under Specifications) for appropriate model.
  2. Make initial drain connections, especially if access to drain is limited once the unit is in place.
  3. Place unit into cut-out and finish plumbing the drain line.
  4. To establish proper sanitation operation and to comply with NSF & health codes, this unit must be sealed to the surface to which it is mounted using an NSF listed sealant. Place a bead of sealant along outer edges of the mounting flange and remove any excessive amount. Make sure there are no gaps in the sealant as the intent is to prevent liquid spillage from adjacent surfaces from passing under inaccessible portions of the equipment.

### Specifications


- Drains**
- 1/2" welded tailpiece
- Cut-out Dimensions**
- Model DI-RF7 - 6-1/4" by 6-1/4"
  - Model DI-RF12 - 6-1/4" by 11-1/4"
  - Model DI-RF18 - 6-1/4" by 17-1/4"
  - Model DI-RF24 - 6-1/4" by 23-1/4"
- Materials**
- All stainless steel
- Faucet**
- Accepts 3/8" cold water lead
  - 30 psi water pressure regulator included
  - 1.2 gallons per minute

To view cleaning and care instructions, please visit:  
[https://www.glastender.com/PDF/F-423-011\\_ss\\_clean\\_care.pdf](https://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf)

03012383  
 Rinser Faucet  
 Assembly

4004503  
 Conforms to NSF/ANSI STD 372

### Dimensional Information

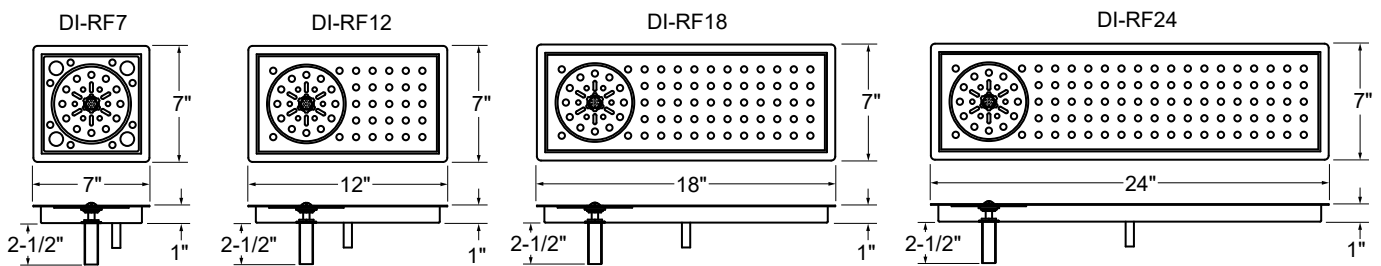

<b>Glastender, Inc.</b> • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 <a href="http://www.glastender.com">www.glastender.com</a>	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.	