DUAL-TEMPERATURE WINE DISPENSER



PRO-LINE™ WINE 59" - 8 KEG / 6 FAUCET

- Designed by wine-industry experts for performance and value.
- Two dedicated temperature zones for optimal wine dispensing.
- Two Sommelier wine fonts with 3 faucets each, drip trays included.
- Commercial grade construction built to last.



MDD58W-E-D

Black



Dual-Temperature: Built In Digital Thermostats







Listed by Edison Testing Laboratories. Conforms to UL & NSF Standards.

Tap handles not included
Tapping hardware not included

www.micromatic.com • 1 (866) 327-4159

PRO-LINE™ WINE 59" - 8 KEG

Job Number:______ Location:





Part No.	Finish	Faucets	Doors	Shipping Weight
☐ MDD58W-E-D	Black	6	2	145 kg
				318 lbs


Operating Performance

Capacity of 20 Liter Kegs	8 (4 per zone)
Cubic Feet (liters)	TBD
Holes for Wine Fonts	2
Hole Diameter	3"
Color-coded Digital Thermostats	2 (Blue LED-Whites & Red LED-Reds)
Temperature Range - Whites	42-48° F (5.5 - 8.8° C)
Temperature Range - Reds	55-65° F (12.7 - 18.3° C)
Approval	ETL Listed

Running Amps	3.0
Compressor HP	1/3
Voltage	115/60/1
Plug Type	NEMA-5-15P
Cord Length	8'
Refrigerant	R290
Charge oz	4.9
Working High/Low Pressure	300 psig / 150 psig

Exterior	18 gauge stainless steel top, 22 gauge solid doors, 24 gauge steel front, sides and back		
Interior	20 gauge stainless steel floor and walls		
Ventilation	Front ventilated		
Plumbing	Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing		
Insulation	Foamed-in-place using high density, CFC-free polyurethane; 2" top, walls and floor		
Accessories	Casters or 6" fixed legs		

Dimensions

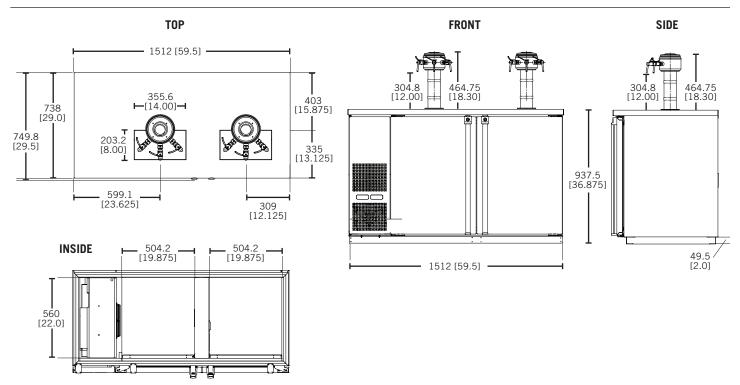



Toll-Free: 1-866-327-4159 www.micromatic.com

West

19791 Bahama St. Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844

Central

10726 North Second St. Machesney Park, IL 61115 Tel. (815) 968-7557

Southeast

2386 Simon Ct. Brooksville, FL 34604 Tel. (352) 799-6331

Northeast

4601 Saucon Creek Rd. Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466