

Cuisine Series Heavy Duty Griddle Top Range

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- C36-1R
- C36-1C
- C36-1S
- C36-1M
- C36-1-1R
- C36-1-1C
- C36-1-1S
- C36-1-1M



Model C36-1R
 Range with 36" Griddle,
 Valve or Thermostat
 Controlled

Standard Features

- Griddle top with 1" (25mm) thick steel plate.
- Hi-lo valve control (-1)
- Griddle control, with embedded thermostat sensor bulb (-1-1)
- Low to 450°F (232°C) (-1-1)
- Stainless front and sides
- Stainless steel front rail
- Stainless steel burner box
- 1 1/4" NPT front gas manifold
- Can be connected individually or in a battery
- 7" (178mm) high stainless steel stub back
- 6" (152mm) stainless steel adj. legs
- Porcelain oven interior
- R model - 4 rack positions
 C model - 3 rack positions
- R model - 1 chrome plated rack
 C model - 3 chrome plated racks
- Fully insulated oven interior
- Safety oven pilot
- Oven thermostat control: 150°-500°F (66°-260°C) (R/C)
- Range base convection oven (C) c/w NEMA 5-15P cord & plug, 1/3 hp motor, 120V 60Hz, 0.6A
- Modular unit (M) can be mounted on Polar Cuisine refrigerated base

Options & Accessories

- Grooved griddle - (full or 1/2)
- Stainless steel oven interior in lieu of porcelain oven interior - NC
- Single or double deck high shelf or back riser
- Full-height stand for modular units with legs or casters
- Stainless steel intermediate shelf for cabinet base
- Stainless steel door(s) for cabinet base units
- Stainless steel back
- Continuous plate rail, 48-72" for battery installations
- Gas shut-off valves: 3/4", 1", 1 1/4" NPT (Specify)
- Gas regulator: 3/4", 1", 1 1/4" NPT (Specify)
- Gas flex hose w/ quick disconnect: 3/4", 1", 1 1/4" (Specify)
- Rear gas connection: 3/4" NPT
- Set of (4) flanged feet (for fastening unit to the floor)
- Set of (4) 5" polyurethane non-marking swivel casters w/front brakes
- Set of (4) 6" swivel casters, w/front brakes
- Extra oven rack
- Extension for 1/9 pans

Specifications

Garland Cuisine 36" (914mm) wide Heavy Duty Range Series. Model _____ with total BTU/h rating of _____ when used with natural/propane gas. Stainless steel front and sides. 6" (152mm) legs with adjustable feet.

Ovens - One piece oven door. Porcelain oven interior with a heavy-duty, "keep-cool" door handle. Standard oven comes with a thermostat with a temperature range from 150° (low) to 500°F (66°-260°C).

Griddle Tops - 1" (25mm) thick steel plate griddle with 3" (76mm) wide grease trough. Burners rated 30,000 BTU/h each. One burner per 12" (305mm) griddle section.


NOTE: Range-based convection oven models can be located in the middle of a battery, banked back-to-back with other equipment, and can be positioned against a wall.

NOTE: Ranges supplied with casters must be installed with an approved restraining device.



Cuisine Series Heavy Duty Griddle Top Range

Cuisine Series Heavy Duty Griddle Top Range

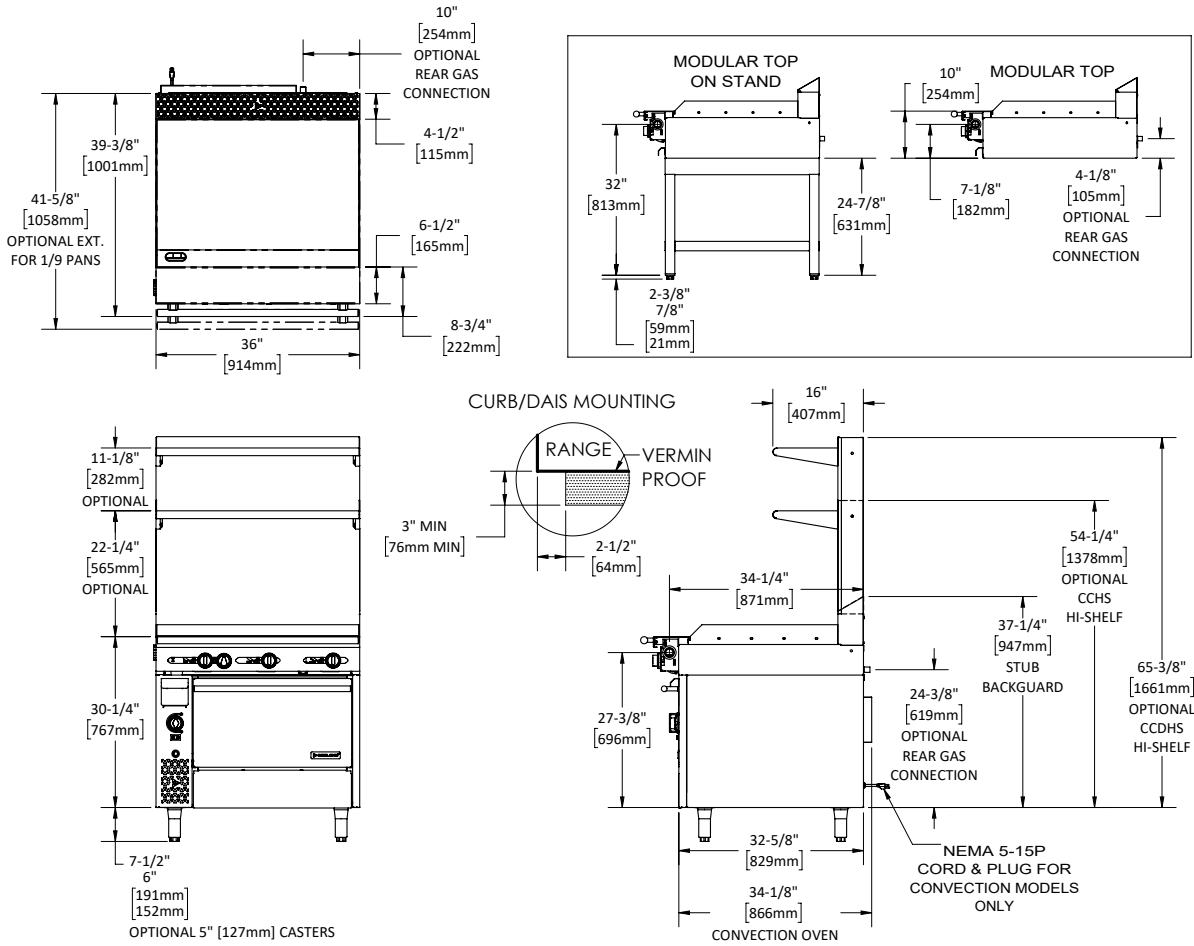

Model #	Description	Total BTU/h NAT. Gas	Total BTU/h Propane	Shipping		Individual Burner Ratings (BTU/h)			
				Cu Ft	lbs/kg	Burner	NAT.	PRO.	
C36-1R	36" Manual Valve Control Griddle Top - w/Standard oven	130,000	125,000	53	706/320	Griddle	30,000	30,000	
C36-1C*	36" Manual Valve Control Griddle Top - w/Convection oven	127,000	125,000	53	706/320	Standard Oven	40,000	35,000	
C36-1S	36" Manual Valve Control Griddle Top - w/Storage Base	90,000	90,000	53	527/239	Convection Oven	37,000	35,000	
C36-1M	36" Manual Valve Control Griddle - w/Modular Top	90,000	90,000	30	405/184	Interior Dimensions: In (mm)			
C36-1-1R	36" Thermostat Control Griddle Top w/Standard Oven	130,000	125,000	53	706/320	Product	Height	Width	Depth
C36-1-1C*	36" Thermostat Control Griddle Top w/Convection Oven	127,000	125,000	53	706/320	Standard Oven	13-1/2 (343)	26-1/4 (667)	29 (737)
C36-1-1S	36" Thermostat Control Griddle Top w/Storage Base	90,000	90,000	53	527/239	Convection Oven	13-1/2 (343)	26-1/4 (667)	25 (635)
C36-1-1M	36" Thermostat Control Griddle Top w/Modular Top	90,000	90,000	30	405/184	Cabinet Base	20-1/2 (521)	32-1/4 (819)	31 (787)
Gas Pressure							NAT.	PRO.	
Minimum Supply							7" WC	11" WC	
Manifold Operating Pressure							6" WC	10" WC	
Gas Manifold 1-1/4" NPT									
Combustible Wall Clearance									
Sides					Back				
10" (254mm)					6" (152mm)				

*120V 60Hz 0.6 A c/w NEMA 5-15P cord & plug

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
7882
01/24

