

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

SCSC-BP

Mobile Self-Contained Cold Pan Serving Counters

Models

- SCSC-36-BP Refrigerated cold pan serving counter, 26" x 21.62" cold pan size
- SCSC-50-BP Refrigerated cold pan serving counter, 39" x 21.62" cold pan size
- SCSC-60-BP Refrigerated cold pan serving counter, 52" x 21.62" cold pan size
- SCSC-74-BP Refrigerated cold pan serving counter, 65" x 21.62" cold pan size
- SCSC-96-BP Refrigerated cold pan serving counter, 78" x 21.62" cold pan size



SCSC-60-BP

Standard Features

- On/off switch mounted to exterior of unit
- 10' long cord and plug are standard
- 5" polyurethane swivel casters for easy cleaning
- Easy to use stainless steel interlock system is standard on base and tray slides
- Environmentally friendly R290 refrigerant
- Counters are standard with 7" deep refrigerated cold pan. Cold pans are fully insulated with foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane insulation
- Pans recessed 2" from top edge of counter
- Enclosed base
- Cold pans are standard with drain with valve
- Adapter bars will be furnished at no additional charge if requested on original order only. Pans are supplied by others
- 1 year parts and labor standard warranty
- Electronic temperature control

Options & Accessories

- Tray slides and work shelves
- Composite fold-down cutting boards
- Line-up interlock device
- Food shields
- Stainless steel overshelf
- Fluorescent or incandescent light fixtures*
- Open understorage with shelf
- 120V/60Hz/1Ø, 10 amp convenience outlet with breaker*
- Dry storage compartment
- Refrigerated understorage (60" unit or longer only)*
- Stainless steel trim strips
- Stainless steel end drop shelf
- Adjustable height casters
- 6" (15cm) high adjustable stainless steel legs
- Laminate exterior panels
- Inclusion of these options will alter the electrical specifications of unit

Specifications

Exterior body is constructed of 18-gauge stainless steel side panels and 14-gauge galvanized bottom. All exterior side panels are reinforced with overlapping corners and are welded in place. All body cutouts are reinforced with 14-gauge galvanized channel supports.

Exterior top is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit.


The refrigerated cold pan is 7" (18cm) deep and constructed of stainless steel to hold 4" deep pans. The cold pan is separated from the exterior top by a thermal break. Copper refrigeration tubing is attached to the sides of the cold pan and is fully insulated with foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane insulation. Cold pan is equipped with a 1" (2.5cm) I.P.S. drain with drain valve located at the

bottom of the unit. Temperatures of 33°F (1°C) to 41°F (5°C) are maintained with pans recessed 2" (5cm) at 86°F ambient room temperature. Pans rest on die-stamped coldpan. Pans by others.


Refrigeration system uses R290 refrigerant and has a self-contained 115 volt, 60 Hertz, single phase hermetically sealed condensing unit with adjustable cold pan pressure control. Unit is wired with a 3-wire, grounded, maximum 10' (3m) cord and plug. Unit has an on/off switch mounted on the exterior.

Castors: Unit is mounted on 5" (13cm) diameter swivel casters with non-marking tires and plate brakes. Overall height of caster assembly is 6.00" (15cm).







Plan View
SCSC-36-BP

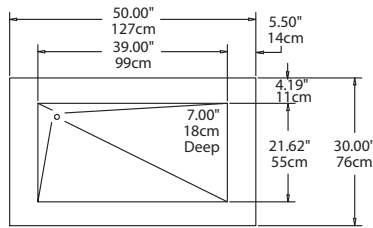


Plan View
SCSC-50-BP

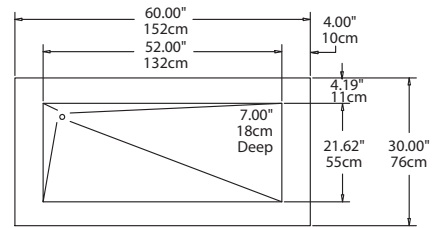


Plan View
SCSC-60-BP

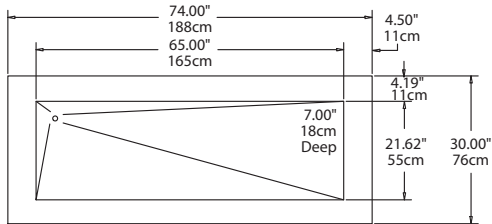


Plan View
SCSC-74-BP

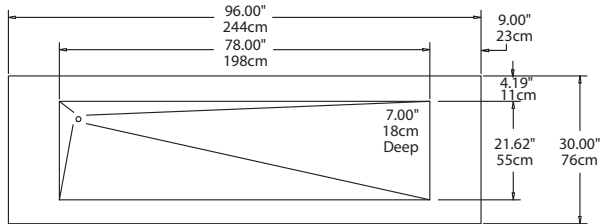

Plan View
SCSC-96-BP



Typical Elevation View
All SCSC-BP Models



Typical End View
All SCSC-BP Models

SCSC-BP

Specifications								
Model	V/Hz/Ph	Amp	H.P.	BTU Load @ 86F	BTU System Capacity @ 86F	Nema Plug	Ship Weight	"DOE kWh/d (base only)"
SCSC-36-BP	115/60/1	2.4	1/5	405	883	5-15P	350lbs/159kg	n/a
SCSC-50-BP	115/60/1	2.4	1/5	608	1020	5-15P	425lbs/193kg	n/a
SCSC-60-BP	115/60/1	3.7	1/4	810	1356	5-15P	500lbs/227kg	n/a
SCSC-74-BP	115/60/1	3.7	1/4	1013	1489	5-15P	575lbs/261kg	n/a
SCSC-96-BP	115/60/1	4.8	1/3	1215	1943	5-15P	650lbs/295kg	n/a

Welbilt reserves the right to make changes to the design or specifications without prior notice.