# BACK BAR EQUIPMENT

## Model: **BB50NSS**

Natural Refrigerant R-290 Model

# 50" Back Bar Cooler

Stainless steel exterior, countertop, interior back and side panels with reinforced stainless steel floor.



### **Options and Accessories**

| (upcharge and lead times may apply)                 |                             |  |
|---|-----------------------------|--|
| Additional epoxy coated shelves                     | Condensing unit on right    |  |
| Stainless steel shelves                             | Wine rack                   |  |
| Food storage rated stainless steel interior (NSF-7) | Casters or legs             |  |
| Riser base* (field installed)                       | Shallow depth               |  |
| Hinged glass doors (consult factory)                | Pass-thru (consult factory) |  |
| Sliding glass doors (consult factory)               |                             |  |

Consult factory for other model configurations, options and accessories.

\* Adding a Riser Base increases overall height 2"



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

| Project Name:    |           |  |
|------------------|-----------|--|
|                  |           |  |
| Model Specified: |           |  |
|                  |           |  |
| Location:        |           |  |
|                  |           |  |
| Item No:         | Quantity: |  |
|                  |           |  |
| AIA #:           | SIS #:    |  |

## **Standard Model Features**

**REFRIGERATION SYSTEM** 

Performance rated front breathing refrigeration system Natural, environmentally safe,

high efficiency R-290 refrigerant<sup>1</sup>

Automatic, hot gas condensate evaporator

Extra large, balanced evaporator coil

### **CABINET ARCHITECTURE**

High density, non-CFC polyurethane foamed-in-place insulation Front, rear and side venting louvered grills Magnetic snap in Santoprene™ door gaskets Cylinder keyed security lock in each door Stainless steel reinforced threshold

### **MODEL FEATURES**

Low profile cabinet design Electronic controller with digital display & hi-low alarm LED interior lighting Off-cycle defrost Easily accessible and serviceable slide-out condensing unit

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

## **Model Specifications**

## **Model Plan Views**

#### **DIMENSIONAL DATA**

| Net Capacity (cubic feet)                                | 16 (453 cu l)   |
|--|-----------------|
| Width, Overall (inches)                                  | 50 (1270 mm)    |
| Depth, Overall (inches)<br>(including handles & bumpers) | 29 ¾16 (741 mm) |
| Depth, Body Only (inches)<br>(less doors)                | 25 (635 mm)     |
| Height, Overall (inches)                                 | 34 ¾ (883 mm)   |
| Capacity: # Barrel Kegs                                  | 0               |
| Capacity: # Straight Wall Kegs                           | 2               |
| Capacity : # 1/6 Size Kegs                               | 8               |
| Number of Doors  | 2               |
| Number of Shelves  | 4               |
|  |                 |

#### **REFRIGERANT DATA**

| Condensing Unit Size (H.P.) | 1/4  |
|-----------------------------|------|
| Capacity (BTU per hour)*    | 1800 |

#### **ELECTRICAL DATA**

| Voltage (International)                        | 115/60/1 (220/50/1) |
|--|---------------------|
| Feed Wires (including ground)                  | 3                   |
| Total Amps (International)                     | 3.7 (3.4)           |
| 10 ft. Cord/Plug [attached]<br>(International) | Yes<br>(No)         |

#### **SHIPPING DATA**

| Weight (pounds)          | 375 (170 kg) |
|--------------------------|--------------|
| Height - Crated (inches) | 46 (1168 mm) |
| Width - Crated (inches)  | 58 (1473 mm) |
| Depth - Crated (inches)  | 42 (1067 mm) |


\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Toll-Free: 800-523-7138 Phone: 215-244-1400

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Fax: 215-244-9579






Due to our continued efforts in developing innovative products, specifications subject to change without notice.



© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc. 50" (1270 mm) (1270 mm) (34 3/4" (83 mm) (83 mm) (83 mm) (83 mm) (16 11/16" (424 mm) (729 mm) (729 mm) (10 mm) (729 mm)

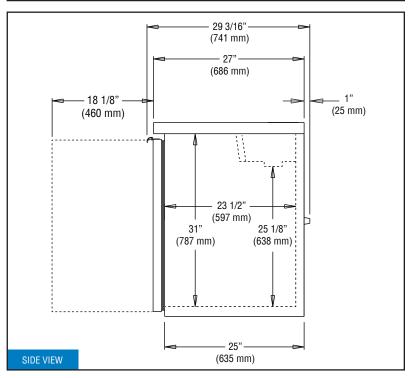

**IMPORTANT NOTE:** Models are completely front breathing and take in and exhaust air through the front grill. For proper operation, the area in front of the cabinet <u>must</u> not be obstructed in any way. A clearance of 1" on the back and 3" on the sides is recommended.