


# SURFACE MOUNT SERIES 5" X 36"

- Add European style while creating dispense excitement.
- Condition the glass before pouring invert glass, push down on sprayer for cold water rinsing.
- Robust 18 gauge stainless steel construction.
- Welded corners, finished smooth for safety and appearance.

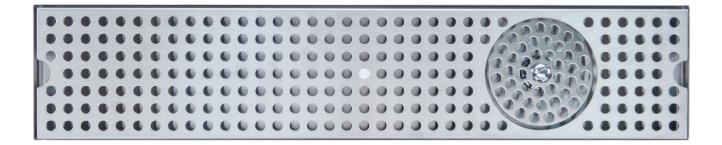

<u>DP-120D-36GR</u> Brushed Stainless Steel

NSF Certified (Rinser Only)

www.micromatic.com • 1 (866) 327-4159

5" WIDTH TRAY WITH GLASS RINSER

Job Number: Location:







## Rinser Water Inlet Installation

- · Always check local plumbing codes first.
- Install in-line water regulator set at 15 PSI from the street water supply.
- Install a shutoff on the rinser water supply.

NOTE: It is recommended a licensed plumber connect the glass rinser to the water supply line. Always use an in-line shut-off and water pressure regulator. Micro Matic shall not be held liable for damage caused by improper installation.

### **Dimensions**



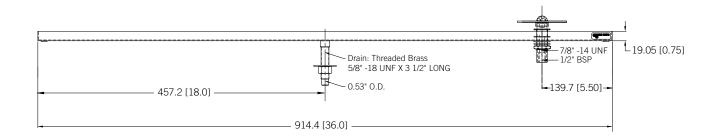



Toll-Free: 1-866-327-4159 www.micromatic.com

#### West

19791 Bahama St. Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844

#### Central

10726 North Second St. Machesney Park, IL 61115 Tel. (815) 968-7557 Fax. (815) 968-0363

#### Southeast

15111 Dispense Ln. Brooksville, FL 34604 Tel. (352) 799-6331 Fax. (352) 796-2429

#### **Northeast**

4601 Saucon Creek Rd. Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466