




METRO SUPER ERECTA EZ-ADD SHELF

How to assemble / disassemble scan here







⚠ CAUTION: WEIGHT CAPACITY	⚠ CAUTION: CONFIGURATIONS
<ul style="list-style-type: none"> Unit load rating with 3 or more Super Erecta, Super Erecta Pro or Super Adjustable standard collared shelves and one or more EZ-Add Shelf levels. STATIONARY: 2000lbs. (907kg). MOBILE: Three times the caster load rating not to exceed 900 lbs. (408kg). Unit load rating with top & bottom Super Erecta or Super Erecta Pro standard collared shelves and one or more EZ-ADD shelf levels. STATIONARY ONLY: 1000lbs. (453kg). EZ-ADD Shelf load rating: 400lbs. (181kg) static load, evenly distributed. 	<ul style="list-style-type: none"> To configure a Stationary Unit with all middle EZ-ADD shelves, you must use Super Erecta or Super Erecta Pro for the top and bottom tiers. Mobile units with posts taller than 54" must include a middle Super Erecta Shelf, Super Erecta Pro Shelf, Super Adjustable Super Erecta Shelf, or Super Erecta 3-Sided Frame. EZ-ADD Shelving has only been evaluated and is compatible with Metro and Olympic wire shelving. EZ-ADD Shelves can be used as intermediate shelves for Security Units.


Failure to follow these instructions could result in personal injury or property damage.

Double check the shelf spacing to make sure the EZ-ADD shelf will install between the shelves.

Assembly Method 1 (most common): when the shelving unit is against one or more walls and other shelving units.
 Minimum # of grooves between shelves

36" length:	14
48" length:	16
60" length:	18

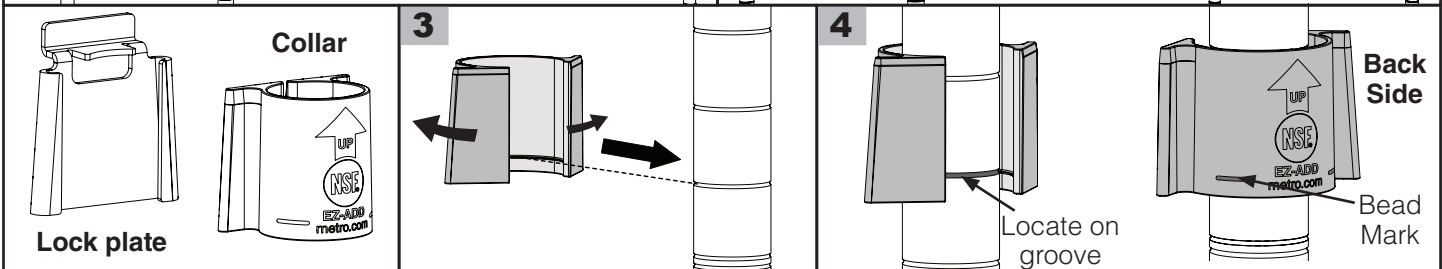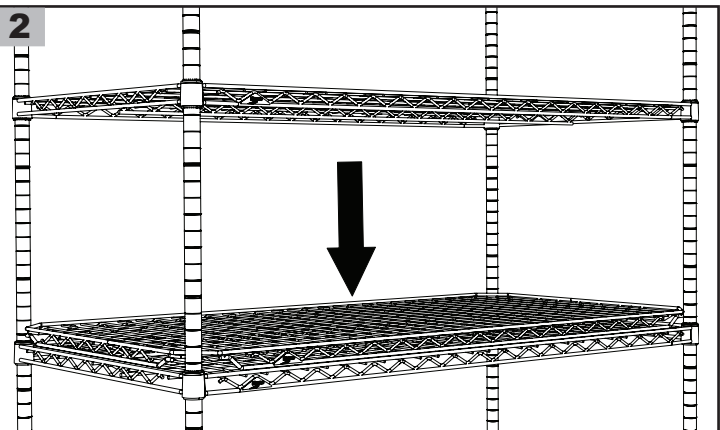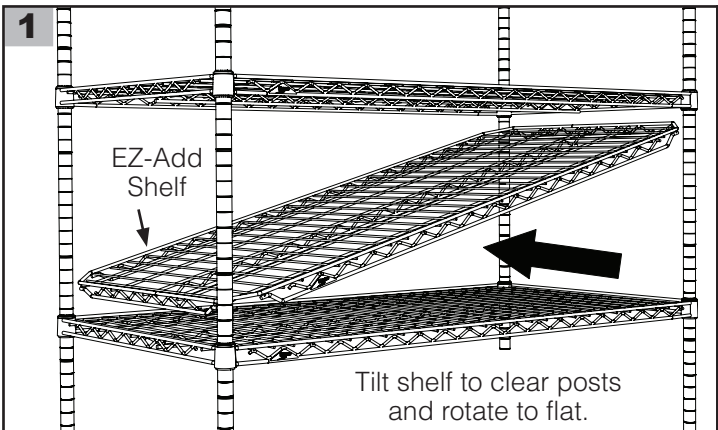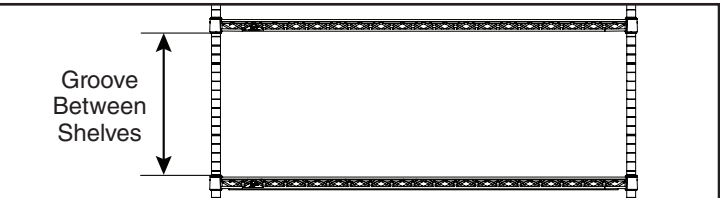

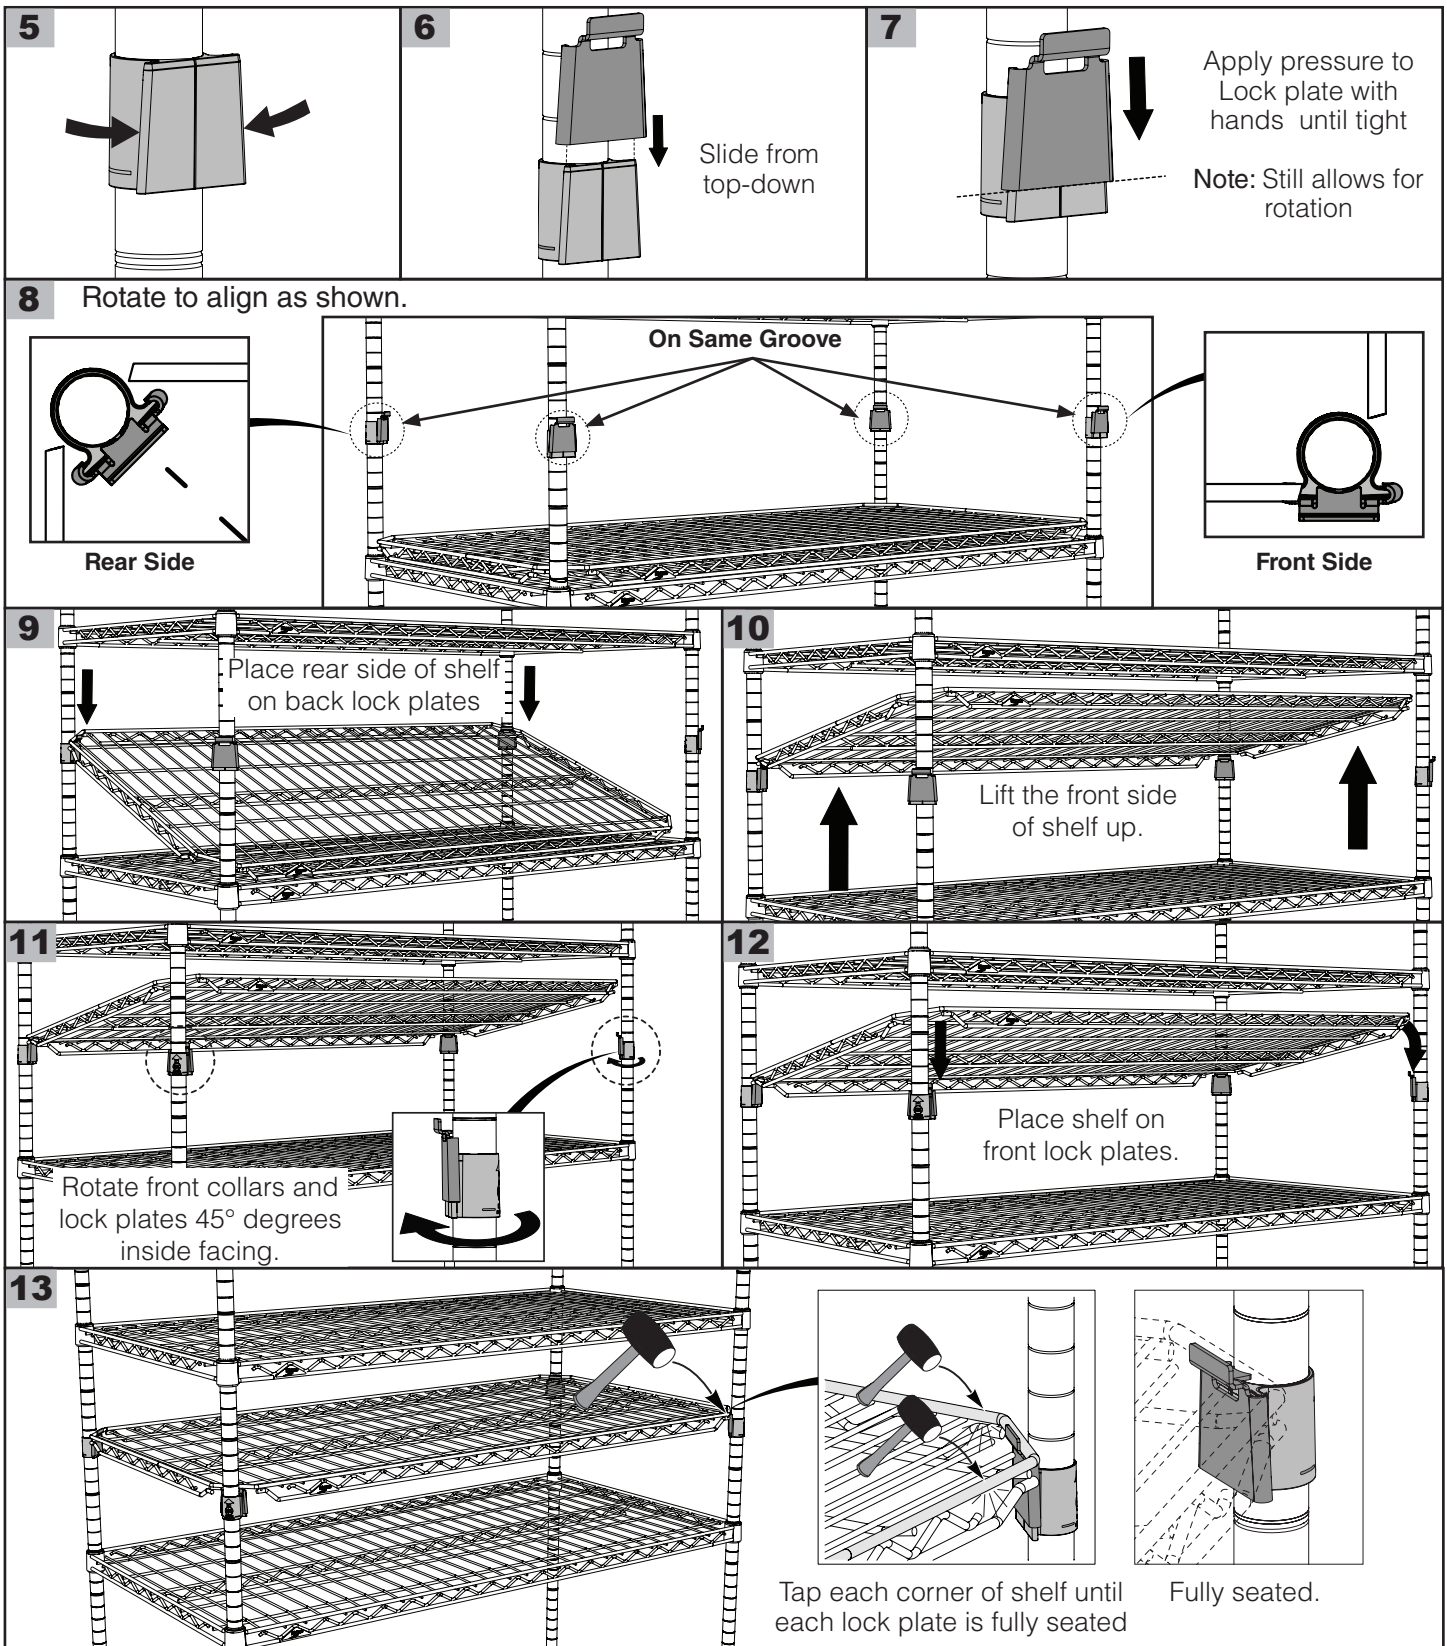

NOTE: See Video for Assembly Method 2

* Save this document for future application, load rating and/or safety reference.

© 2023 InterMetro Industries Corporation, Wilkes-Barre, PA 18705
L01-682 REV 03/23

an Ali Group Company



The Spirit of Excellence