




# 60" SHALLOW DEPTH HEAVY-DUTY

# Bistro

60" SHALLOW DEPTH HEAVY-DUTY

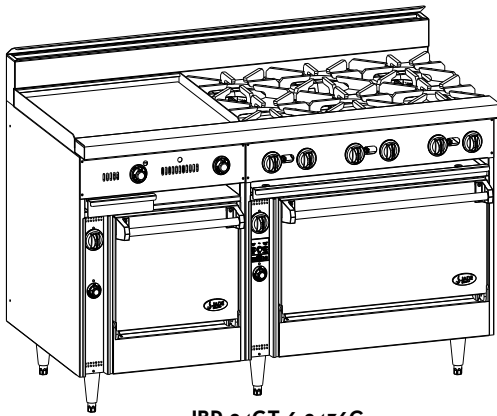

**JBR-24GT-6-2436C**  
shown with stub back

### DESCRIPTION:

To be model #JBR \_\_\_\_\_ manufactured by Jade. Open top sections are to have cast iron 30,000 BTU burners with 12" x 12" steel grate per burner. Griddles are to have polished 1" steel plate with 24,000 BTU burner every 12". Unit to be provided with (2) 3/4" gas regulators.

### SPECIFY BASE:

#### STANDARD OVEN

To have (1) or (2) conventional oven base with stainless steel lining. Oven sides and bottom to be removable without tools. Provide with one oven rack, with wires curled around main frame and chrome plated. Thermostat to adjust from 150°F to 500°F to have 30,000 BTU/hr burner per oven. Oven interior (20" W x 14" H x 24" D)(28" W x 14" H x 24" D).

#### CONVECTION OVEN

To have (1) or (2) convection oven base with 14 gauge stainless steel interior. Provide with one oven rack, with wires curled around main frame and chrome plated. Thermostat to adjust from 150°F to 500°F to have 30,000 BTU/hr burner. Provide with 1/3 HP 115/60/1 blower motor. Oven interior (19-3/4" W x 13-1/2" H x 20-1/2" D)(27-3/4" W x 13-1/2" H x 20-1/2" D).

#### CABINET BASE

To have open cabinet base constructed of 14 gauge all welded steel.

### SPECIFY TYPE OF GAS WHEN ORDERING.

### SPECIFY ALTITUDE WHEN ABOVE 2,000 FT.

MODEL NO.	DESCRIPTION	
<input type="checkbox"/> JBR-10-2436	10 OPEN BURNERS W/ 2 OVENS	
<input type="checkbox"/> JBR-10-36	10 OPEN BURNERS W/ OVEN AND CABINET BASE	
<input type="checkbox"/> JBR-10	10 OPEN BURNERS W/ CABINET BASE	
<input type="checkbox"/> JBR-24G-6-2436	24" GRIDDLE, 6 OPEN BURNERS W/ 2 OVENS	
<input type="checkbox"/> JBR-24G-6-36	24" GRIDDLE, 6 OPEN BURNERS, OVEN CABINET BASE	
<input type="checkbox"/> JBR-24G-6	24" GRIDDLE, 6 OPEN BURNERS W/CABINET BASE	
<input type="checkbox"/> JBR-36G-4-2436	36" GRIDDLE, 4 OPEN BURNERS W/ 2 OVENS	
<input type="checkbox"/> JBR-36G-4-36	36" GRIDDLE, 4 OPEN BURNERS, OVEN, CABINET BASE	
<input type="checkbox"/> JBR-36G	36" GRIDDLE, 4 OPEN BURNERS W/CABINET BASE	
<input type="checkbox"/> JBR-48G-2-2436	48" GRIDDLE, 2 OPEN BURNERS W/ 2 OVENS	
<input type="checkbox"/> JBR-48G-2-36	48" GRIDDLE, 2 OPEN BURNERS, OVEN, CABINET BASE	
<input type="checkbox"/> JBR-48G-2	48" GRIDDLE, 2 OPEN BURNERS W/CABINET BASE	
<input type="checkbox"/> JBR-6-24G-2436	6 OPEN BURNERS, 24" GRIDDLE W/ 2 OVENS	
<input type="checkbox"/> JBR-6-24G-36	6 OPEN BURNERS, 24" GRIDDLE, OVEN, CABINET BASE	
<input type="checkbox"/> JBR-6-24G	6 OPEN BURNERS, 24" GRIDDLE W/ CABINET BASE	
<input type="checkbox"/> JBR-4-36G-2436	6 OPEN BURNERS, 36" GRIDDLE W/ 2 OVENS	
<input type="checkbox"/> JBR-4-36G-36	6 OPEN BURNERS, 36" GRIDDLE, OVEN, CABINET BASE	
<input type="checkbox"/> JBR-4-36G	6 OPEN BURNERS, 36" GRIDDLE W/CABINET BASE	
<input type="checkbox"/> JBR-2-48G-2436	2 OPEN BURNERS, 48" GRIDDLE W/ 2 OVENS	
<input type="checkbox"/> JBR-2-48G-36	2 OPEN BURNERS, 48" GRIDDLE, OVEN, CABINET BASE	
<input type="checkbox"/> JBR-2-48G	2 OPEN BURNERS, 48" GRIDDLE W/ CABINET BASE	
<input type="checkbox"/> JBR-60G-2436	60" GRIDDLE W/ 2 OVENS	
<input type="checkbox"/> JBR-60G-36	60" GRIDDLE, OVEN, CABINET BASE	
<input type="checkbox"/> JBR-60G	60" GRIDDLE W/CABINET BASE	

**Note:** For all models available with a single convection oven base (add a "C" to the end of the model number, which will default to the larger oven on the right - this applies to "-36" & "-2436" models only). All models with a double convection oven base (add a "CC" to the end of the model number - this applies to "2436" models only)

**Note:** For hot top section in lieu of 2 open burners, add 1HT and delete 2 open burners from model number.

### STANDARD FEATURES

- Stainless steel front, sides, tray bed and stub back
- 14 gauge stainless steel all welded construction
- Stainless steel removable oven interior
- One chrome plated oven rack per oven (wires curled and welded around main frame with no sharp ends)
- Oven control located in cool zone
- Stainless steel gas tubing throughout
- Stainless steel pilot tips
- (2) 3/4" gas regulators
- Stainless steel stub back



WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550  
Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA





# 60" SHALLOW DEPTH HEAVY-DUTY

# Bistro

MODEL	BTUS	WIDTH	DEPTH	HEIGHT	APPX. SHP. WT.
JBR-10-2436*	360,000	60"	SEE DRAWING	SEE DRAWING	820 LBS.
JBR-10-36*	330,000	60"	SEE DRAWING	SEE DRAWING	735 LBS.
JBR-10	300,000	60"	SEE DRAWING	SEE DRAWING	655 LBS.
JBR-24G-6-2436*	288,000	60"	SEE DRAWING	SEE DRAWING	865 LBS.
JBR-24G-6-36*	258,000	60"	SEE DRAWING	SEE DRAWING	780 LBS.
JBR-24G-6	228,000	60"	SEE DRAWING	SEE DRAWING	700 LBS.
JBR-36G-4-2436	252,000	60"	SEE DRAWING	SEE DRAWING	895 LBS.
JBR-36G-4-36	222,000	60"	SEE DRAWING	SEE DRAWING	810 LBS.
JBR-36G-4	192,000	60"	SEE DRAWING	SEE DRAWING	730 LBS.
JBR-48G-2-2436	216,000	60"	SEE DRAWING	SEE DRAWING	905 LBS.
JBR-48G-2-36	186,000	60"	SEE DRAWING	SEE DRAWING	820 LBS.
JBR-48G-2	156,000	60"	SEE DRAWING	SEE DRAWING	740 LBS.
JBR-6-24G-2436*	284,000	60"	SEE DRAWING	SEE DRAWING	865 LBS.
JBR-6-24G-36	254,000	60"	SEE DRAWING	SEE DRAWING	780 LBS.
JBR-6-24G	224,000	60"	SEE DRAWING	SEE DRAWING	700 LBS.
JBR-4-36G-2436	252,000	60"	SEE DRAWING	SEE DRAWING	895 LBS.
JBR-4-36G-36	222,000	60"	SEE DRAWING	SEE DRAWING	810 LBS.
JBR-4-36G	192,000	60"	SEE DRAWING	SEE DRAWING	730 LBS.
JBR-2-48G-2436	216,000	60"	SEE DRAWING	SEE DRAWING	905 LBS.
JBR-2-48G-36	186,000	60"	SEE DRAWING	SEE DRAWING	820 LBS.
JBR-2-48G	156,000	60"	SEE DRAWING	SEE DRAWING	740 LBS.
JBR-60G-2436	180,000	60"	SEE DRAWING	SEE DRAWING	925 LBS.
JBR-60G-36	150,000	60"	SEE DRAWING	SEE DRAWING	840 LBS.
JBR-60G	120,000	60"	SEE DRAWING	SEE DRAWING	760 LBS.

#### AVAILABLE OPTIONS

- Stainless steel high shelf
- Stainless steel high riser
- Thermostatic griddle control (add T to Model #)
- Grooved griddle surface (add G to Model #)
- Casters

#### GRIDDLE

- 1" thick highly polished steel plate
- One 24,000 BTU burner ever 12"

#### OPEN BURNERS

- 30,000 BTU easy-clean cast iron open burner
- 12" x 12" lift-off steel grates

#### ACCESSORIES

- 6" Casters, front two locking (5" diameter wheel)
- 36" flex hose with quick disconnect & restraining device
- 48" flex hose with quick disconnect & restraining device
- Additional oven rack (one supplied per oven)

#### ELECTRIC CONVECTION OVEN ONLY:

- Power Supply: 115/60/1 - 6 foot cord with 3 prong plug
- Total maximum amps 4.0/oven
- Electronic Spark Ignitor: activated by power switch, ignites standing pilot
- Fan Switch: three positions, on for normal operation, on for quick cool down, off.

#### NOTE: SPECIFY TYPE OF GAS WHEN ORDERING.

#### UTILITY INFORMATION:

- (2) 3/4" Connections - see drawing for location

- Required operating pressure:  
Natural Gas 5" W.C. minimum  
Propane Gas 10" W.C. minimum  
14" W.C. maximum

**Note:** This unit must be connected with the gas appliance regulator supplied.

WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550  
Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA



# 60" SHALLOW DEPTH HEAVY-DUTY

*Bistro*

[ ] = MILLIMETERS

