




Bun Pans and Pan Racks

Panco®

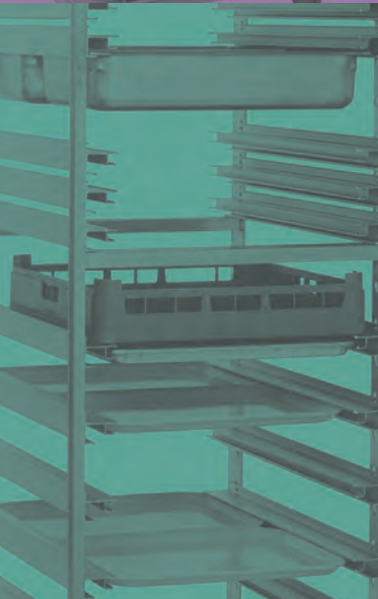

Panco® Transport Heating Cabinets



Features on all units include aluminum construction on exterior and interior, bottom-mounted control panel and heating system removable for cleaning or servicing, adjustable thermostatic temperature control with digital temperature indicator, full 270° open swing door, heavy duty 5" swivel casters (two with brake), standard removable slides, magnetic door latch, full perimeter bumper, 8' cord and plug. Units available in 31 1/2" narrow width, 32 1/2" extended width, or 39 1/2" wide width. Available in full-size height of 76 1/2", half-size heights of 30 1/2" (on extended-width units) or 39 1/2" (on narrow-width and wide-width units), and "undercounter" height of 30 1/2" (available only with extended width).



full size unit with solid door



full size unit with Tuffak® door



half size extended insulated unit with full Tuffak® door



half size unit with single solid door

Digital Display



- Easy-touch front control panel with membrane switches.
- Liquid Crystal Display (LCD) read-out.
- Digital setting of air temperature.
- Overheat caution alarm.
- Embedded LED technology.
- Upgrade software control.

Build a model number

The charts below list the design elements available for each type of cabinet. Each chart column contains two or more choices of each design element (examples: half or full size, narrow or wide width, etc.). To spell out a model number, refer to the first chart and choose the designated letters and numbers from left to right.

Example: #**HCFNSSI-RA2.25-120** indicates a full size Heated Holding Cabinet (**HCF**), narrow width (**N**), with solid door (**S**), with standard single door (**S**), insulation (**I-**), wire slides (**RA**), 2.25" slide spacing (**2.25-**), and 120-volt 20-amp electricity (**120**).

HEATED HOLDING CABINETS

For use in operations where hot food is to be stored or transported and held at hot food serving temperatures. 2000-watt heating capacity via two 1000-watt elements for heated air.

Half Height, Full Height, or Undercounter Height	Cabinet Width	Door Style	Door Type	Insulation***	Slide Type	Slide Spacing	Voltage Type
Full Height = HCF Half Height = HCH Undercounter Height = HCU	Narrow = N* Extended = E* Wide = W*	Solid = S full Tuffak® = L	Standard Single Door = S Dutch Doors = D** Pass-through Single Door = P Pass-through Dutch Doors = PD**	None = N- Insulated = I-	Wire = RA Wire Universal = RC	2.25" = 2.25-* Custom = (other #-)	120V 20amp = 120 120V 15amp = 120A 208V 15amp = 208 240V 15amp = 240

PROOFING HOLDING CABINET

Provides humidity and heat needed for yeast products (breads, rolls, etc.) to rise. 2000-watt heating capacity via two elements: one 1000-watt element for heated air, & one 1000-watt element for humidity control.

Half Height, Full Height, or Undercounter Height	Cabinet Width	Door Style	Door Type	Insulation***	Slide Type	Slide Spacing	Voltage Type
Full Height = PCF Half Height = PCH Undercounter Height = PCU	Narrow = N* Extended = E* Wide = W*	Solid = S full Tuffak® = L	Standard Single Door = S Dutch Doors = D** Pass-through Single Door = P Pass-through Dutch Doors = PD**	None = N- Insulated = I-	Wire = RA Wire Universal = RC	2.25" = 2.25-* Custom = (other #-)	120V 20amp = 120 120V 15amp = 120A 208V 15amp = 208 240V 15amp = 240

HEATING/PROOFING HOLDING CABINETS

Versatile – for heating, holding and proofing. 2000-watt heating capacity. In "Heating mode": Two 1000-watt elements for heated air. In "Proofing Mode": One 1000-watt element for heated air, and one 1000-watt element for humidity control.

Half Height, Full Height, or Undercounter Height	Cabinet Width	Door Style	Door Type	Insulation***	Slide Type	Slide Spacing	Voltage Type
Full Height = HPF Half Height = HPH Undercounter Height = HPU	Narrow = N* Extended = E* Wide = W*	Solid = S full Tuffak® = L	Standard Single Door = S Dutch Doors = D** Pass-through Single Door = P Pass-through Dutch Doors = PD**	None = N- Insulated = I-	Wire = RA Wire Universal = RC	2.25" = 2.25-* Custom = (other #-)	120V 20amp = 120 120V 15amp = 120A 208V 15amp = 208 240V 15amp = 240

* 2 1/4" standard slide spacing for Narrow- and Wide-width units (3" for Extended units). For custom slide spacing, please indicate desired slide spacing in inches ;

** Available only on Full Size units.

*** Wide-width units available in insulated only.

Panco® Open Utility Racks

18 Series Deluxe Racks — narrow opening ^{NSF}

For 18" x 26" trays. Features 5" casters, front-to-back and side-to-side crossbracing, and 1" square tubing. Aluminum models shipped knocked down. Stainless steel models are welded and shipped fully assembled.

Accessories: casters with locking brakes, rotary donut bumpers, perimeter bumper*, vertical corner bumpers, and pan stops. See pages 10 & 11.

overall dimensions width x depth x height	sliding space	pan capacity	weight	model #
ALUMINUM*				
21" x 26½" x 64¼"	5"	11	29 lbs.	OUR-1811-5
21" x 26½" x 64¼"	3"	18	36 lbs.	OUR-1818-3
21" x 26½" x 69¼"	3"	20	37 lbs.	OUR-1820-3
21" x 26½" x 69¼"	2¼"	24	42 lbs.	OUR-1824-2
STAINLESS STEEL				
20½" x 28" x 66½"	5"	11	105 lbs.	OUR-1811-5-SR
20½" x 28" x 66½"	3"	18	122 lbs.	OUR-1818-3-SR
20½" x 28" x 72½"	3"	20	127 lbs.	OUR-1820-3-SR
20½" x 28" x 66½"	2¼"	24	137 lbs.	OUR-1824-2-SR

* Factory welded assembly required for aluminum models specified with perimeter bumper. See page 11.



18 series rack

OPTIONAL CART COVERS FOR 18 SERIES DELUXE RACKS

Fire, mildew, and rot resistant. Easy to clean, waterproof, and feature dual zippers. Available in white PVC laminate or transparent. White laminate features a clear window on one narrow side.

width x depth x height	fits units	WHITE	TRANSPARENT
		model #	model #
24" x 30" x 61½"	OUR-1811-5	P2RCW-3	P2RC-3
	OUR-1818-3		
	OUR-1824-3		
24" x 30" x 69"	OUR-1820-3	P2RCW-4	P2RC-4



rack with optional transparent cart cover



rack with optional white cart cover

18 Series Working Height Racks ^{NSF}

Features include top pan guides, outrigger pan mounts, and 5" swivel casters. Aluminum models shipped knocked down. Stainless steel models assembled. Dimensions shown include caster hub. Add 2¼" to depth for caster trail.

Accessories: casters with locking brakes, rotary donut bumpers, vertical corner bumpers, and pan stops. See pages 10 & 11.

overall dimensions width x depth x height	sliding space	pan capacity**	ALUMINUM*		STAINLESS STEEL	
			weight	model #	weight	model #
22" x 28¾" x 35"	3"	9	29 lbs.	OUR-1807-3	78	OUR-1807-3-SR

* Factory assembly available for all aluminum models.

** Total pan capacity is 9 when outrigger pan mounts are used.

OPTIONAL TOPS FOR WORKING HEIGHT RACKS

description	weight	model #
maple top	30 lbs.	606376
poly top	25 lbs.	606377
stainless steel top	30 lbs.	606378



working height rack with optional maple top and pans

26 Series Racks — wide opening ^{NSF}

For 18" x 26" trays. Features include 5" casters and front-to-back/side-to-side crossbracing. Aluminum models shipped knocked down. Stainless steel models shipped assembled. Dimensions shown include caster hub. Add 2¼" to depth for caster trail.

Accessories: casters with locking brakes, rotary donut bumpers, perimeter bumper*, vertical corner bumpers, and pan stops. See pages 10 & 11.

overall dimensions width x depth x height	sliding space	pan capacity	weight	model #
ALUMINUM*				
28½" x 19" x 69"	5"	12	37 lbs.	OUR-2611-5
28½" x 20" x 66¾"	3"	18	43 lbs.	OUR-2618-3
28½" x 20" x 72"	3"	20	53 lbs.	OUR-2620-3
28½" x 20" x 66¾"	2¼"	24	56 lbs.	OUR-2624-2
STAINLESS STEEL				
28½" x 20" x 66¾"	5"	11	112 lbs.	OUR-2611-5-SR
28½" x 20" x 66¾"	3"	18	129 lbs.	OUR-2618-3-SR
28½" x 20" x 72½"	3"	20	158 lbs.	OUR-2620-3-SR
28½" x 20" x 66¾"	2¼"	24	161 lbs.	OUR-2624-2-SR

* Factory welded assembly required for aluminum models specified with perimeter bumper. See page 11.



26 series rack

Panco® Open Utility Racks



all-welded rack

All-Welded Pan Racks

Heavy duty all-welded aluminum construction. Features 5" stem casters, 1" square tubing, and side-to-side crossbracing. 18 Series front-load and 26 Series side-load units available.

Accessories: casters with locking brakes, rotary donut bumpers, perimeter bumper, vertical corner bumpers, and pan stops. See pages 10 & 11.

description	overall dimensions		weight	sliding space	full size pan capacity	model #
	width x depth x height					
front load	20½" x 26" x 38"		19 lbs.	3"	10	OUR-1810-3/W*
front load	20½" x 26" x 69"		25 lbs.	5"	12	OUR-1812-5/W
front load	20½" x 26" x 69"		38 lbs.	3"	20	OUR-1820-3/W
front load	20½" x 26" x 69"		47 lbs.	2"	30	OUR-1830-2/W
side load	28½" x 20" x 72¼"		27 lbs.	5"	12	OUR-2612-5/W
side load	28½" x 19" x 69"		27 lbs.	3"	20	OUR-2620-3/W
side load	28½" x 19" x 69"		32 lbs.	2"	30	OUR-2630-2/W

* Model #OUR-1810-3/W features stainless steel top. All others features open top.



stainless steel rack

Stainless Steel Racks

For 12" x 20" pans. Stainless steel models only. 5" swivel casters. Features stainless steel channel tray slides. Shipped assembled. Dimensions shown include caster hub. Add 2¾" to depth for caster trail.

Accessories: casters with locking brakes, rotary donut bumpers, perimeter bumper, vertical corner bumpers, and pan stops. See pages 10 & 11.

description	overall dimensions		weight	sliding space	pan capacity	model #
	width x depth x height					
single width	16½" x 22¾" x 64½"		127 lbs.	3"	18	OUR-1218-3-SR
double width	31¼" x 22¾" x 64½"		250 lbs.	3"	36	OUR-1236-3-SR



combination rack

Combination Racks

For 12" x 20" pans, 18" x 26" sheet pans, or 14" x 18" trays. Aluminum models only. 5" swivel casters. Shipped assembled. Dimensions shown include caster hub. Add 2¾" to depth for caster trail.

Accessories: casters with locking brakes, rotary donut bumpers, perimeter bumper, vertical corner bumpers, and pan stops. See pages 10 & 11.

overall dimensions width x depth x height	weight	sliding space	-----pan/tray capacity-----			model #
			12" x 20" pan	18" x 26" tray	14" x 18" tray	
20½" x 29½" x 66½"	70 lbs.	5"	11	11	22	OUR-1211-5
20½" x 29½" x 66½"	75 lbs.	3"	18	18	36	OUR-1220-3



carrier rack

Carrier Racks

For 20" x 20" utensil/glass racks. 5" swivel casters. Aluminum and stainless steel models available.

Aluminum models shipped knocked down. Stainless steel models shipped assembled. Dimensions shown include caster hub. Add 2¾" to depth for caster trail.

Accessories: casters with locking brakes, rotary donut bumpers, perimeter bumper*, vertical corner bumpers, and pan stops. See pages 10 & 11.

overall dimensions width x depth x height	sliding space	pan capacity	weight	model #
ALUMINUM*				
22" x 20½" x 69"	10"	6	44 lbs.	OUR-2006-9A
22" x 20½" x 65"	7"	8	45 lbs.	OUR-2008-6A
STAINLESS STEEL				
22¾" x 22½" x 65¾"	9"	6	100 lbs.	OUR-2006-9SR
22¾" x 22½" x 64¾"	6½"	8	102 lbs.	OUR-2008-6SR

* Factory welded assembly required for aluminum models specified with perimeter bumper. See page 9.

Panco® Open Utility Racks

Double Compartment Racks

For 18" x 26" trays/pans. 5" swivel casters. Aluminum and stainless steel models available. All models shipped assembled. Dimensions shown include caster hub. Add 2 3/4" to depth for caster trail.

Accessories: casters with locking brakes, rotary donut bumpers, perimeter bumper, vertical corner bumpers, and pan stops. See pages 10 & 11.

overall dimensions width x depth x height	sliding space	pan capacity	ALUMINUM		STAINLESS STEEL	
			weight	model #	weight	model #
40" x 28" x 66 1/2"	5"	22	135 lbs.	OUR-1822-5	270 lbs.	OUR-1822-5-SR
40" x 28" x 66 1/2"	3"	36	150 lbs.	OUR-1836-3	300 lbs.	OUR-1836-3-SR
40" x 28" x 66 1/2"	2 1/4"	48	176 lbs.	OUR-1848-2	350 lbs.	OUR-1848-2-SR



double compartment rack

Four-Compartment Racks

For 10" x 14" trays or 14" x 18" trays. 5" swivel casters. Aluminum models only. Shipped assembled with center tray stop. Dimensions shown include caster hub. Add 2 3/4" to depth for caster trail.

Accessories: casters with locking brakes, rotary donut bumpers, perimeter bumper, and vertical corner bumpers. See pages 10 & 11.

overall dimensions width x depth x height	weight	sliding space	-----tray capacity-----		model #
			tray size	quantity	
40" x 30" x 69 3/4"	154 lbs.	4 1/2"	14" x 18"	52	OUR-1452-4
32" x 22" x 69 3/4"	100 lbs.	4 1/2"	10" x 14"	52	OUR-1052-4-A
34 3/4" x 24 1/2" x 68 5/8"	100 lbs.	4 1/2"	10" x 14 3/4"	52	OUR-1052-4-B



four compartment rack

Aluminum Racks with Side Panels

For 18" x 26" trays. Features include 5" swivel casters. Aluminum models only.

Model #ORO-1840 is shipped knocked down. **Accessories available for model #ORO-1840 include** casters with locking brakes, perimeter bumper, vertical corner bumpers, and pan stops. See pages 10 & 11.

Model #OR-1840 is shipped assembled, and features solid top and bottom. **Accessories available for model #OR-1840 include** casters with locking brakes, rotary donut bumpers, perimeter bumper, vertical corner bumpers, and pan stops. See pages 10 & 11.

overall dimensions width x depth x height	description	weight	sliding space	18" x 26" tray capacity	model #
20 3/4" x 28" x 70 3/4"	standard	68 lbs.	1 1/2"	40	ORO-1840
20 3/4" x 28" x 70 3/4"	heavy duty	88 lbs.	1 1/2"	40	OR-1840



heavy-duty
aluminum rack
with side panel

"Z" Type Nesting Racks

For 18" x 26" pans. All-welded aluminum construction. When not in use, these racks take up less square footage than standard racks do by "nesting" inside each other. Features 5" plate casters.

Accessories: casters with locking brakes and vertical corner bumpers. See pages 10 & 11.

overall dimensions width x depth x height	weight	sliding space	pan capacity	model #
20 1/2" x 26" x 69 1/2"	72 lbs.	3"	20	OUR-1820-3-N
20 1/2" x 26" x 69 1/2"	86 lbs.	2"	30	OUR-1830-2-N



"Z" type nesting rack

Panco® Open Utility Racks



vertical storage
oval tray rack

Vertical Storage Racks

For 23" x 28" oval trays. Features include 5" swivel casters and bottom panel sloped toward center. Single-tier and double-tier models available. Aluminum and stainless steel. All units shipped assembled. Dimensions shown include caster hub. Add 2 3/4" to depth for caster trail.

Accessories: casters with locking brakes, rotary donut bumpers, and vertical corner bumpers. See pages 10 & 11.

overall dimensions width x depth x height	tray capacity	ALUMINUM		STAINLESS STEEL	
		weight	model #	weight	model #
26 1/4" x 31 1/4" x 38 1/2"	40	60 lbs.	OTS-128-A	100 lbs.	OTS-128-SR
26 1/4" x 31 1/4" x 66"	80	110 lbs.	OTS-228-A*	150 lbs.	OTS-228-SR*

*Double-tier models



horizontal storage
oval tray rack

Horizontal Storage Racks

For 23" x 28" oval trays. All-welded aluminum models only.

Accessories: casters with locking brakes, rotary donut bumpers, perimeter bumper, vertical corner bumpers, and pan stops. See pages 10 & 11.

overall dimensions width x depth x height	weight	sliding space	tray capacity	model #
30" x 26 3/4" x 69"	28 lbs.	6"	10	OTR-2810-A/W
27" x 29 1/2" x 72 1/2"	35 lbs.	3"	20	OTR-2820-A/W

Multiple Purpose Racks

Adjustable universal slides accommodate almost any popular size tray or pan (see chart). 5" swivel casters. Slides adjustable in increments of 2 1/2". Channel base. Aluminum models only. Shipped assembled.

Accessories: casters with locking brakes, pan stops, and extra universal angle slides. See pages 10 & 11.

overall dimensions width x depth x height	weight	universal slides supplied	model #
25 5/8" x 28" x 69 1/2"	71 lbs.	10 sets	MPR-10
25 5/8" x 28" x 69 1/2"	81 lbs.	12 sets	MPR-12

PAN/TRAY SIZES FOR MULTIPLE PURPOSE RACKS

width x depth x height	width x depth x height	width x depth x height
10 7/8" x 19 3/4" x 2 1/4"	12" x 18" x 6"	18" x 26" x 1"
10 7/8" x 19 3/4" x 3 1/2"	14" x 18"	18" x 26" x 2 3/8"
11 7/8" x 20" x 6 1/2"	15" x 20"	18" x 26" x 3 1/2"
12" x 20" x 2 1/2"	20" x 20"	18" x 26" x 4"
12" x 20" x 4"	22 1/2" x 20 1/2" x 6 1/2"	18" x 26"
12" x 20" x 6"	20" x 22" x 1 1/4"	18" x 13" x 1"
12" x 18" x 2 1/2"	20" x 22" x 2 1/4"	18" x 13" x 4"
12" x 18" x 4"	20" x 22" x 3 1/2"	



multi-purpose
rack

Panco® Open Utility Racks

Universal Angle Racks

Features include adjustable universal slides, solid top, solid bottom, and 5" swivel casters. Each set of universal slides holds two 12" x 20" pans, plus one 18" x 26" sheet pan, one 15" x 20" tray or one 20" x 20" rack. Aluminum and stainless steel models available. Shipped assembled.

Accessories: casters with locking brakes, perimeter bumper, pan stops, and extra universal angle slides. See pages 10 & 11.

overall dimensions width x depth x height	sliding space	number of slides	ALUMINUM		STAINLESS STEEL*	
			weight	model #	weight	model #
23" x 26" x 64 ³ / ₄ "	2 ¹ / ₂ "	11	127 lbs.	UAR-64-A	140 lbs.	UAR-64-SR
23" x 26" x 69 ³ / ₄ "	2 ¹ / ₂ "	13	135 lbs.	UAR-70-A	147 lbs.	UAR-70-SR

*All stainless steel units are supplied with standard extruded aluminum universal slides.



universal
angle rack

Roll-In Refrigerator Racks

Models UARR employ universal slides. Units fit specifications of most major refrigerator manufacturers, including Hobart, Traulsen, and Victory. Features dolly frame with recessed plate casters. Aluminum and stainless steel models available. Shipped assembled.

Accessories: casters with locking brakes and pan stops. See pages 10 & 11.

overall dimensions width x depth x height	weight	sliding space	tray sizes	tray capacity	model #
ALUMINUM					
20 ¹ / ₂ " x 26" x 64"	62 lbs.	2 ¹ / ₂ "	18" x 26"	24	OURR-1824-2-A
20 ¹ / ₂ " x 26" x 64"	52 lbs.	3"	18" x 26"	18	OURR-1818-3-A
20 ¹ / ₂ " x 26" x 64"	42 lbs.	5"	18" x 26"	11	OURR-1811-5-A
23" x 26" x 64"	62 lbs.	3"	12" x 20"	36*	OURR-2036-3-A
23 ¹ / ₂ " x 26" x 64"	110 lbs.	2 ¹ / ₂ "	UAS**	**	UARR-64-A
STAINLESS STEEL					
20 ¹ / ₂ " x 26" x 63 ³ / ₄ "	187 lbs.	2 ¹ / ₂ "	18" x 26"	24	OURR-1824-2-SR
20 ¹ / ₂ " x 26" x 63 ³ / ₄ "	151 lbs.	3"	18" x 26"	18	OURR-1818-3-SR
20 ¹ / ₂ " x 26" x 63 ³ / ₄ "	121 lbs.	5"	18" x 26"	11	OURR-1811-5-SR
23" x 26" x 64"	154 lbs.	3"	12" x 20"	36*	OURR-2036-3-SR
23 ¹ / ₂ " x 26" x 64 ³ / ₄ "	160 lbs.	2 ¹ / ₂ "	UAS**	**	UARR-64-SR***

* Two 12" x 20" trays per set of tray slides.

** 11 Universal Angle Slides come with "UARR" models. Each set holds two 12" x 20" pans, one 18" x 26" tray, plus one 15" x 20" tray or one 20" x 20" rack.

*** Stainless steel model UARR-64-SR supplied with standard extruded aluminum universal slides.



roll-in
refrigerated rack

Platter Racks

All racks are all welded aluminum construction. Rack slides are designed to hold either 10¹/₂" or 12¹/₂" plastic platters. Features 5" casters.

Accessories: casters with locking brakes, perimeter bumper, vertical corner bumpers, and pan stops.

See pages 10 & 11.

overall dimensions width x depth x height	weight	sliding space	platter size	platter capacity	model #
13 ³ / ₈ " x 30" x 38 ³ / ₄ "	18 lbs.	6"	10 ¹ / ₂ "	5	OPL-10-5A
13 ³ / ₈ " x 30" x 38 ³ / ₄ "	18 lbs.	5"	10 ¹ / ₂ "	6	OPL-10-6A
13 ³ / ₈ " x 30" x 69 ¹ / ₄ "	26 lbs.	6"	10 ¹ / ₂ "	10	OPL-10-10A
13 ³ / ₈ " x 30" x 69 ¹ / ₄ "	27 lbs.	5"	10 ¹ / ₂ "	12	OPL-10-12A
15 ¹ / ₈ " x 30" x 38 ³ / ₄ "	19 lbs.	6"	12 ¹ / ₂ "	5	OPL-12-5A
15 ¹ / ₈ " x 30" x 38 ³ / ₄ "	17 lbs.	5"	12 ¹ / ₂ "	6	OPL-12-6A
15 ¹ / ₈ " x 30" x 69 ¹ / ₄ "	28 lbs.	6"	12 ¹ / ₂ "	10	OPL-12-10A
15 ¹ / ₈ " x 30" x 69 ¹ / ₄ "	25 lbs.	5"	12 ¹ / ₂ "	12	OPL-12-12A

WHITE DISPLAY PANS FOR PLATTER RACKS


width x depth x height	model #
18" x 26" x 1 ¹ / ₈ "	DP1826-W
9" x 26" x 1 ¹ / ₈ "	DP926-W
12" x 18" x 1 ¹ / ₈ "	DP1218-W

PLATTERS FOR PLATTER RACKS

width x depth x height	model #
12 ¹ / ₂ " x 24" x ³ / ₄ "	PL1224
12 ¹ / ₂ " x 30" x ³ / ₄ "	PL1230
10 ¹ / ₂ " x 30" x ³ / ₄ "	PL1030



platter rack



display pan



platter

Panco® Open Utility Racks



full size can rack

Can Racks

Racks constructed of high strength extruded aluminum sections. All welded construction. Full size units feature open top. Half size units come with aluminum tops (suffix "A") or 1/2"-thick poly tops (suffix "AP"). All mobile units feature heavy duty 4" plate casters.

Accessories: casters with locking brakes, perimeter bumper, and vertical corner bumpers. See pages 10 & 11.

description	overall dimensions width x depth x height	weight	sliding space	# of tiers high	can capacity		model #
					#10	#5	
full size, stationary	25" x 35" x 71"	63 lbs.	7 1/2"	9	162	216	FCR-10-9A
full size, mobile	25" x 35" x 77 1/4"	63 lbs.	7 1/2"	9	162	216	OCR-10-9A
half size, mobile	25" x 35" x 35"	39 lbs.	7 1/2"	3	54	72	OCR-10-3A
half size, mobile	25" x 35" x 41"	36 lbs.	7 1/2"	4	72	96	OCR-10-4A
half size, mobile	25 1/2" x 35 1/2" x 32 3/4"	51 lbs.	7 1/2"	3	54	72	OCR-10-3AP
half size, mobile	25 1/2" x 35 1/2" x 40 1/4"	54 lbs.	7 1/2"	4	72	96	OCR-10-4AP



oven rack

Oven Racks


Aluminum. Features heavy duty welded construction, 4" oven plate casters, 1" square tubing, and side-to-side crossbracing.

Accessories: oven plate casters and pan stop. See pages 10 & 11.

description	overall dimensions width x depth x height	weight	sliding space	pan capacity		model #
				#10	#5	
front load	20 1/2" x 26" x 69"	28 lbs.	6"	10		ORF-1810-6
front load	20 1/2" x 26" x 69"	29 lbs.	5"	12		ORF-1812-5
front load	20 1/2" x 26" x 69"	31 lbs.	4"	15		ORF-1815-4
front load	20 1/2" x 26" x 69"	33 lbs.	3"	20		ORF-1820-3
front load	20 1/2" x 26" x 69"	41 lbs.	2"	30		ORF-1830-2
side load	28 1/2" x 19" x 69"	28 lbs.	6"	10		ORS-2610-6
side load	28 1/2" x 19" x 69"	29 lbs.	5"	12		ORS-2612-5
side load	28 1/2" x 19" x 69"	31 lbs.	4"	15		ORS-2615-4
side load	28 1/2" x 19" x 69"	33 lbs.	3"	20		ORS-2620-3
side load	28 1/2" x 19" x 69"	37 lbs.	2"	30		ORS-2630-2

OPTIONAL ACCESSORIES FOR OVEN RACKS

description	model #
track pin	consult factory

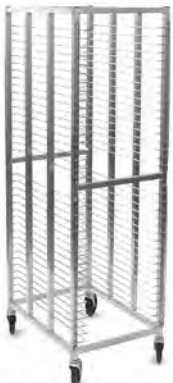

wire pan rack

Wire Pan Racks (NSF)

All aluminum square tubular construction. Front load and side load models offered. Features side-to-side crossbracing, nickel chrome-plated steel wire racks, and 5" casters.

Accessories: casters with locking brakes, rotary bumpers, perimeter bumper, vertical corner bumpers, and pan stop. See pages 10 & 11.

description	overall dimensions width x depth x height	weight	sliding space	pan capacity		model #
				#10	#5	
front load	20 1/2" x 28" x 69"	64 lbs.	1 1/2"	36		WPR-FL-36
side load	28 1/2" x 20" x 69"	64 lbs.	1 1/2"	36		WPR-SL-36



donut rack

Donut Rack (NSF)

Heavy duty, all aluminum welded construction. Features include six crossbraces, 1" square tubing, and 5" heavy duty casters.

Accessories: casters with locking brakes, rotary bumpers, perimeter bumper, vertical corner bumpers, and pan stop. See pages 10 & 11.

overall dimensions width x depth x height	weight	sliding space	23" x 23"		model #
			donut screen capacity		
26 1/4" x 24" x 69 1/4"	30 lbs.	3"	20		ODR-2320-3

Panco® Open Utility Racks

Open Lug Racks

All welded aluminum construction. Features 5" heavy duty casters.

Accessories: casters with locking brakes, rotary bumpers, perimeter bumper, vertical corner bumpers, and pan stop. See pages 10 & 11.

overall dimensions width x depth x height	weight	sliding space	lug capacity	model #
18 $\frac{3}{4}$ " x 26" x 71 $\frac{1}{4}$ "	20 lbs.	10 $\frac{1}{16}$ "	6	OLR-6A
18 $\frac{3}{4}$ " x 26" x 51 $\frac{1}{4}$ "	16 lbs.	10 $\frac{1}{16}$ "	4	OLR-4A
19" x 26" x 31 $\frac{1}{4}$ "	14 lbs.	10 $\frac{1}{16}$ "	2	OLR-2A
15 $\frac{3}{4}$ " x 26" x 20 $\frac{3}{4}$ "	12 lbs.	10 $\frac{1}{16}$ "	1	OLR-1A

NESTING LUG BIN

width x depth x height	model #
15 $\frac{3}{4}$ " x 24 $\frac{1}{2}$ " x 8 $\frac{1}{2}$ "	NL1626



open lug rack

Open Bus Box Cart

All welded aluminum construction. Features 5" heavy duty casters.

Accessories: casters with locking brakes, rotary bumpers, perimeter bumper, vertical corner bumpers, and pan stop. See pages 10 & 11.

overall dimensions width x depth x height	weight	sliding space	box capacity	model #
20 $\frac{3}{4}$ " x 19" x 40 $\frac{3}{4}$ "	16 lbs.	10 $\frac{3}{4}$ "	3	OBC-3A



open bus box cart

BUS BOX TUBS FOR OPEN BUS BOX CART

Made of high-density polyethylene.

width x length x depth	model #
21 $\frac{1}{4}$ " x 15 $\frac{3}{4}$ " x 5"	BBT-5
21 $\frac{1}{4}$ " x 15 $\frac{3}{4}$ " x 7"	BBT-7

Pizza Pan Racks

All aluminum construction. Adjustable and all-welded models available. Both models feature 5" casters.

Holds round and square pans. Adjustable model features adjustable pan opening for 10" to 16" pans.

Knock-down construction. All-welded model features solid aluminum top.

Accessories: casters with locking brakes, rotary bumpers, perimeter bumper, vertical corner bumpers, and pan stop. See pages 10 & 11.

description	overall dimensions	weight	sliding space	pan capacity	model #
	width x depth x height				
adjustable	adj. x 13 $\frac{3}{8}$ " x 34 $\frac{3}{4}$ "	26 lbs.	2"	13	OUR-PZA-12A
all-welded	22" x 20" x 33 $\frac{3}{4}$ "	36 lbs.	2"	12	OUR-PZ-12A



adjustable
pizza pan rack

Pizza Dough Box Rack

Solid aluminum top. All welded aluminum construction. Features 5" casters. Holds pizza dough boxes.

overall dimensions width x depth x height	weight	sliding space	box capacity	model #
26 $\frac{1}{2}$ " x 20 $\frac{3}{4}$ " x 33 $\frac{3}{4}$ "	27	3 $\frac{3}{4}$ "	7	OUR-DB-7A

PIZZA DOUGH BOX

Made of durable thermoplastic. Stackable design. 12 per carton.

description	width x depth x height	weight/dz.	model #
pizza dough box	18" x 26" x 3"	46 lbs.	PDB
cover	18" x 26"	14 lbs.	PDBC



pizza dough box rack

Bun Pan Dolly

Heavy duty welded, all-aluminum construction. Features 4" plate casters. Shipped assembled.

Accessories: casters with locking brakes. See page 10.

overall dimensions width x depth x height	weight	weight capacity	full size pan capacity	model #
27" x 18 $\frac{1}{2}$ " x 7"	14 lbs.	400 lbs.	60	BPD-1826-A



bun pan dolly

Panco® Open Utility Racks



glass rack dolly

Glass Rack Dolly

Heavy duty welded, all-aluminum construction. Features 4" plate casters. Shipped assembled.

Accessories: casters with locking brakes. See bottom of this page.

overall dimensions width x depth x height	weight	model #
20" x 22" x 9"	14 lbs.	GRD-2020-A



aluminum dunnage rack

Aluminum Dunnage Racks

All aluminum construction. Features 1 1/2" square tubing and plastic feet. Models with 12" height available at no extra cost. To order, replace "08" in model number with "12". Example: WDR203612-A.

overall dimensions width x length x height	weight	weight capacity	number of legs	number of lats	model #
20" x 36" x 8"	10 lbs.	1500 lbs.	4	4	WDR203608-A
20" x 48" x 8"	14 lbs.	1800 lbs.	4	4	WDR204808-A
20" x 60" x 8"	18 lbs.	2000 lbs.	4	4	WDR206008-A
24" x 36" x 8"	12 lbs.	1500 lbs.	4	5	WDR243608-A
24" x 48" x 8"	16 lbs.	1800 lbs.	4	5	WDR244808-A
24" x 60" x 8"	20 lbs.	2000 lbs.	4	5	WDR246008-A

Nesting Dunnage Racks

All aluminum construction. these racks are stackable, saving space when not in use.

overall dimensions width x length x height	weight	weight capacity	model #
18" x 24" x 12"	8 lbs.	3000 lbs.	NDR182412-A
18" x 36" x 12"	10 lbs.	3000 lbs.	NDR183612-A
18" x 48" x 12"	12 lbs.	2500 lbs.	NDR184812-A
20" x 24" x 12"	8 lbs.	3000 lbs.	NDR202412-A
20" x 36" x 12"	10 lbs.	3000 lbs.	NDR203612-A
20" x 48" x 12"	12 lbs.	2500 lbs.	NDR204812-A
24" x 24" x 12"	8 lbs.	3000 lbs.	NDR242412-A
24" x 36" x 12"	11 lbs.	3000 lbs.	NDR243612-A
24" x 48" x 12"	14 lbs.	2500 lbs.	NDR244812-A



nesting dunnage rack



pan truck

Pan Truck

Heavy duty, all aluminum construction. Features 1" square tubing, 5" casters, side supports, and rear pan strap.

Accessories: casters with locking brakes. See bottom of this page.

overall dimensions width x depth x height	weight	weight capacity	full size pan capacity	model #
21" x 27" x 33 1/2"	15 lbs.	400 lbs.	60	PT-1826-A

Panco® Rack Accessories

To order accessories, add a slash "/" onto the end of unit model number. Then add the suffix indicating corresponding option or accessory model number(s). For example, model number UAR-64-A/ADG indicates a universal angle rack with the following accessories: locking brakes ("A"), perimeter bumper ("D"), and aluminum pan stop ("G").



caster with locking brake

Casters

Sold as single packed casters.

description	accessory model #
4" hi-temp oven plate caster with built-in grease fitting	606587
4" hi-temp oven plate caster with brake	606588
4" plate caster with built-in grease fitting	606589
4" plate caster with brake	606590
5" pan truck caster	606593
5" stem caster	606594
5" stem caster with brake	606595
5" plate caster	606598
5" plate caster w/brake	606599



rotary bumper

Casters with Locking Brakes

For all units except oven racks.

description	accessory model #
set of two, 4" or 5" -diameter	A
set of four, 4" or 5" -diameter	B

Rotary Bumpers

For use with stem casters.

description	weight	accessory model #
set of four, 5" -diameter	2	C

Panco® Rack Accessories

Perimeter Bumper

For all units except oven racks, multiple purpose rack, roll-in refrigerator racks, and vertical storage oval tray racks.

Factory welded assembly is required on aluminum knocked-down units specified with perimeter bumpers.

description	weight	accessory model #
full perimeter bumper	4 lbs.	D

Pan Stops

Prevents pans and/or trays from sliding out of unit.

description	weight	accessory model #
aluminum	1 lb.	G
stainless steel	2 lbs.	H

Factory Assembly


For aluminum units that would otherwise ship knocked down.

model #
L

Vertical Corner Bumpers

For all units except working height racks.



description	weight	accessory model #
set of four, 12"	2 lbs.	F



Extra Universal Angle Slides

Per pair. Accommodates a variety of different size trays and pans.

description	weight	accessory model #
for multiple purpose rack	5 lbs.	606379
for universal angle rack	5 lbs.	606570



Panco® Aluminum Sheet Pans

Great baked goods come from great pans... and great pans comes from Panco®!

18 Gauge Aluminum Sheet Pans

Made from H-24 3003 aluminum alloy, the industry's best, proven to be harder and more durable. All aluminum pans feature a rust-resistant wire bead for rust-free durability and extended use. Packed 12 per box.

description	dimensions	SOLID	PERFORATED	GLAZED
		model #	model #	model #
half size	17 $\frac{1}{2}$ " x 12 $\frac{1}{2}$ "	SP1813-18	PP1813-18	n/a
full size	17 $\frac{1}{2}$ " x 25 $\frac{1}{2}$ "	SP1826-18	PP1826-18	SP1826-G



Heavy Duty 16 Gauge Sheet Pans

description	dimensions	model #
solid, full size	17 $\frac{1}{2}$ " x 25 $\frac{1}{2}$ "	SP1826-16

NSF Sheet Pans

All NSF pans are solid and 12 gauge construction, heavier than the standard aluminum sheet pans. Instead of a wire bead around the perimeter of the pan, the bead is open. Packed 12 per box.

description	dimensions	model #
solid, full size, NSF	17 $\frac{1}{2}$ " x 25 $\frac{1}{2}$ "	SP1826-N
solid, full size, clear anodized NSF	17 $\frac{1}{2}$ " x 25 $\frac{1}{2}$ "	SP1826-NCA

Freight prepaid on 40 dozen or more pans. All other freight collect.



Drip Racks

Designed to fit inside half size and full size Panco® sheet pans. Available in chrome (packed 12 per box) or type 304 stainless steel finish (packed 6 per box). Mat wires are crisscrossed, creating a $\frac{3}{8}$ " mesh. Integral supports hold the mat approximately $\frac{5}{8}$ " off the working surface.

description	width x length x depth	weight	chrome	stainless steel
			model #	model #
half size rack	11 $\frac{1}{8}$ " x 16 $\frac{1}{8}$ " x $\frac{3}{4}$ "	2 lbs.	DPRK1216C	DPRK1216
half size rack with ledge	11 $\frac{1}{8}$ " x 16 $\frac{1}{8}$ " x 1 $\frac{1}{4}$ "	2 lbs.	n/a	DPRK1216L
full size rack	16 $\frac{3}{8}$ " x 24 $\frac{3}{4}$ " x 1"	3 lbs.	DPRK1725C	DPRK1725





Panco® Transport Systems

A simple solution to a frustrating situation... "How can we get all this from here to there?" Panco® Transport Racks provide the most efficient way to handle the many items required in the preparation, serving and storage of your products.



Panco® Transport Racks succeed in pairing efficiency with durability. Developed in conjunction with the needs of the customer, the following features make Panco® mobile open utility racks the choice of the foodservice industry.

- Designed with the end user in mind to endure the test of time . All Panco® racks are constructed of stainless steel or high-strength extruded aluminum sections.
- Roll, glide and maneuver easily with non-marking NSF® approved swivel casters.
- Rack slides are designed to fit most popular tray sizes and are configured to accommodate a variety of products.
- Available in several widths and heights, Panco® provides the perfect size open transport rack to fit your needs.
- While all transport units can also be used as storage areas, there are workstation and refrigerator roll-in models as well.

The Eagle Advantage™ begins right here in our state of the art manufacturing facility - with 14 acres under one roof, where the most comprehensive broadline product offering in the industry takes shape. This all-inclusive design and production capability offers distinct advantages to our customers. Streamlined ordering and shipping substantially reduce freight, receiving, installation and administrative costs.

Supporting it all is a framework of highly responsive customer service representatives, the most innovative, versatile and durable equipment available on the market today, a fleet of company-owned trucks, plus amply stocked distribution centers in strategic locations nationwide - which guarantees product availability and delivery.

Together, it adds up to product excellence enhanced by measurable cost savings and value. We call it *The Eagle Advantage™* and you can profit from it.



Foodservice Division:
Phone: (800) 441-8440 • FAX: (302) 653-2065

Corporate Headquarters:
100 Industrial Boulevard • Clayton, DE
19938-8903 USA • Phone: (302) 653-3000

www.eaglegrp.com

