



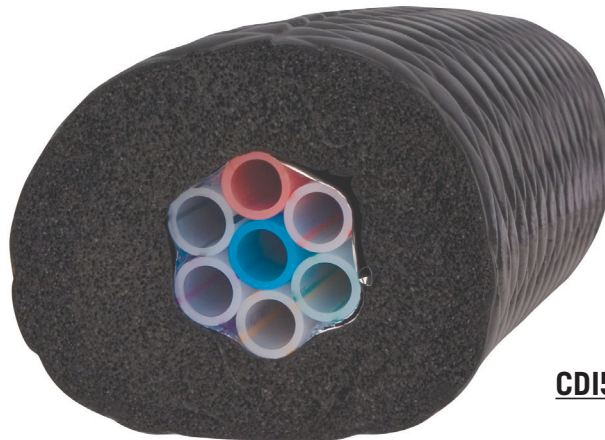

# BARRIERMASTER FLAVOURLOCK TRUNKLINE

5 PRODUCT - 3/8" I.D.

- Barriermaster Flavourlock tubing prevents gas permeation ensuring beverage quality.
- Dependable delivery of virtually all beverages from walk-in to tower.
- Black Diamond® jacket is 15% more thermally efficient than traditional tape jacket.
- Color coded lines for easy identification.

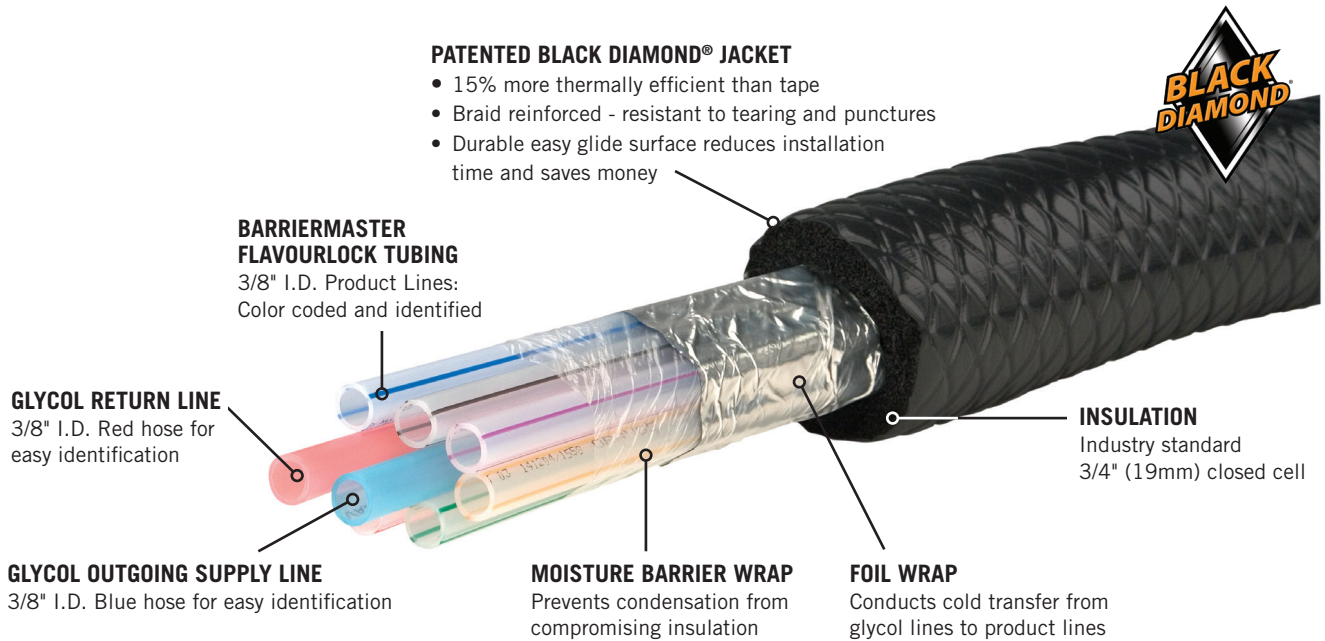

**CDI532-BF**

Standard 51 Listed  
Food Equipment Materials

[www.micromatic.com](http://www.micromatic.com) • 1 (866) 327-4159

5 PRODUCT - 3/8" I.D.


Job Number: \_\_\_\_\_ Location: \_\_\_\_\_

Part No.	Description	Shipping Weight
<input type="checkbox"/> CDI532-BF	5 Product Lines / 2 Glycol Lines	.27 kg (per 305mm) .60 lbs (per foot)

## Performance

<b>Product Lines</b>	9.5mm I.D. (3/8" I.D.) Barriermaster Flavourlock tubing
<b>Glycol Cooling Lines</b>	9.5mm I.D. x 12.7mm O.D. (3/8" I.D. x 1/2" O.D.) polyethylene tubing <b>Outgoing:</b> Blue color coded <b>Return:</b> Red color coded
<b>Moisture Barrier Wrap</b>	Food quality barrier film
<b>Cold Transfer Wrap</b>	Aluminum foil
<b>Insulation</b>	19mm (3/4") closed cell
<b>Black Diamond® Jacket</b>	15% more thermally efficient than tape. Braid reinforced, resistant to tearing.
<b>Exterior Marks</b>	Sequential foot marking, every 610mm (2 ft.)
<b>Fire Rating</b>	Class 1 - Self-extinguishing to BS3924, Class 1 when applied to insulation.
<b>Certification</b>	NSF/ANSI Standard 51 Food Equipment Materials.

## Dimensions

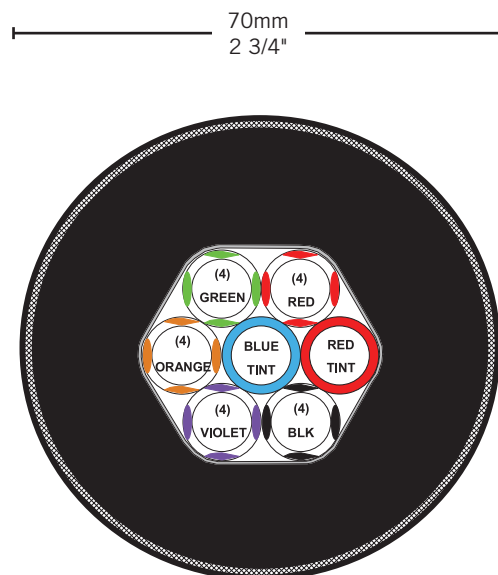

 **MICRO MATIC**  
Toll-Free: 1-866-327-4159  
[www.micromatic.com](http://www.micromatic.com)

**West**  
19791 Bahama St.  
Northridge, CA 91324  
Tel. (818) 701-9765  
Fax. (818) 701-9844

**Central**  
10726 North Second St.  
Machesney Park, IL 61115  
Tel. (815) 968-7557  
Fax. (815) 968-0363

**Southeast**  
15111 Dispense Ln.  
Brooksville, FL 34604  
Tel. (352) 799-6331  
Fax. (352) 796-2429

**Northeast**  
4601 Saucon Creek Rd.  
Center Valley, PA 18034  
Tel. (610) 625-4464  
Fax. (610) 625-4466