



ATLAS METAL

1135 N.W. 159th DRIVE, MIAMI, FLORIDA 33169

TEL 305.625.2451

TOLL FREE 800.762.7565

FAX 305.623.0475

WWW.ATLASFOODSERV.COM


SALES@ATLASFOODSERV.COM

Project: _____

Item No.: _____

Quantity: _____

SLIM-LINE SERVING EQUIPMENT

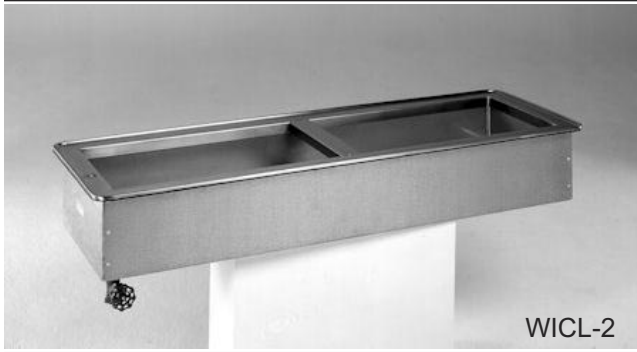

SLIM-LINE COLD PAN

Iced Cold Pan
4-5/8" Standard Depth
or 9-3/4" Full Depth

- WICL-2
- WICL-3
- WICL-4

- WICDL-2
- WICDL-3
- WICDL-4

SPECIFICATIONS

TOP: Constructed of 18 gauge, type 304 stainless steel, die stamped with a raised perimeter bead. There shall be a solid vinyl gasket under the beaded edge to form a seal to the counter top, thus preventing seepage or marring of the counter top. Embossed mounting lugs are provided along the inner surface of the top to hold a full set of removable separator channels in place.

LINER: The inner liner shall be 18 gauge, type 304 stainless steel, one piece construction, all welded, ground and polished to a uniform finish. All corners are covered with a minimum 1/4" radius. A 3/4" dia. drain with strainer, 4" PVC nipple, and valve is provided.

INSULATION: The pan is fully insulated with high density polystyrene, 1" thick on all sides, 2" thick on the bottom and enclosed with a 22 gauge galvanized steel outer case.


Specifications subject to change without notice.

STANDARD FEATURES

- Slim-line configuration - it can install in counters only 16" wide
- Fully insulated to hold ice longer
- Factory applied gasket - makes installation a snap and seals units to the counter top, thus eliminating seepage
- Can be used for ice display, standard 12" x 20" pans with the use of separator channel(s), or fractional size pans with the use of optional adapter bars
- 1-Year Parts & Labor Warranty
- NSF Certified

ACCESSORIES

- Stainless Steel adapter bars (pgs. DI-51-52)
- Stainless Steel adapter plates (pgs. DI-51-52)
- WFBL - Stainless steel perforated false bottom
- CPL - Cover Plate with handles, S/S
- RDVE - Rear Drain Valve Extension

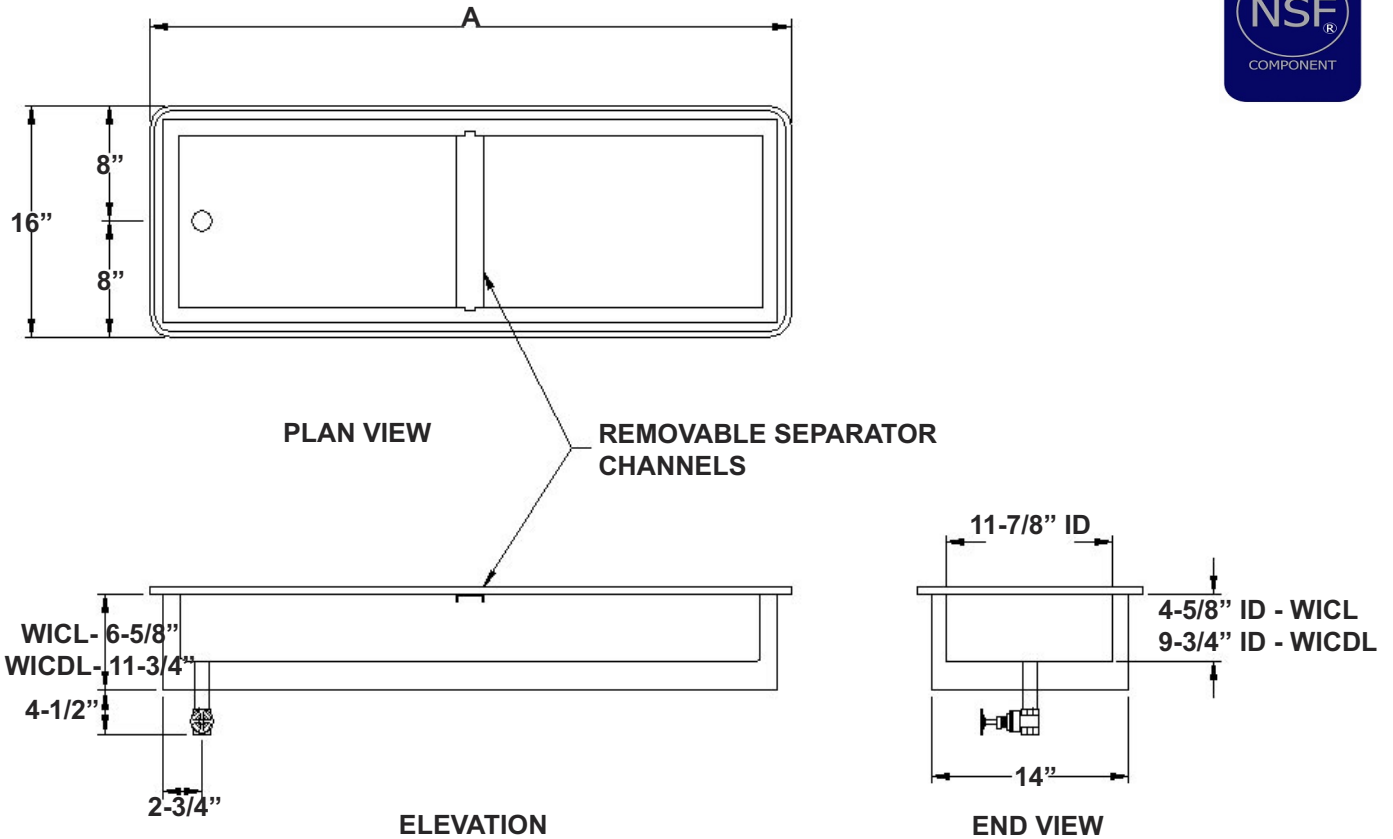

MODEL	PAN OPENING	PAN SIZE	CUT OUT REQUIRED	"A"	SHIP WT. (LBS.)
WICL-2 WICDL-2	2	11-7/8" X 41-3/4" X 4-5/8" (30.1 X 106 X 11.7cm)	14-1/4" X 44-1/4" (36.1 X 112.3cm)	46" (116.8cm)	45 (20.4kg) 48 (21.7kg)
WICL-3 WICDL-3	3	11-7/8" X 63-1/2" X 4-5/8" (30.1 X 161.2 X 11.7cm)	14-1/4" X 66" (36.1 X 167.6cm)	67-3/4" (172cm)	132 (59.8kg) 139 (63kg)
WICL-4 WICDL-4	4	11-7/8" X 85-1/4" X 4-5/8" (30.1 X 216.5 X 11.7cm)	14-1/4" X 87-3/4" (36.1 X 222.8cm)	89-1/2" (227.3cm)	150 (68kg) 158 (71.6kg)