

ROLL-IN RACK for WIRE BASKET SYSTEMS for OVEN MODEL RR-1332 and HOLDING CABINET MODEL RH-1332

FEATURES AND BENEFITS:

- Durable Roll-In-Rack designed for moving school prepackaged meals in baskets from prep area, central kitchen, commissary, or cooler into oven and then hold.
- Designed specifically for RR-1332-D Series ovens and RH-1332-D Series Roll-In cabinets.
- Fully welded stainless steel construction for rigidity and durability.
- Stainless steel angles spaced on 3" centers. Holds two 13" x 26" side-by-side baskets, 16 baskets high; (Baskets not included) for a total of 320 meals.
- Inboard heavy duty 5" swivel casters, two with swivel lock brakes. Wheel placement permits easy "in-and-out" of roll-ins.




ROR-201-SBS-1332-D



ACCESSORIES and OPTIONS (Available at extra cost):

- Wire Baskets, 13" x 26" x 2-5/8"

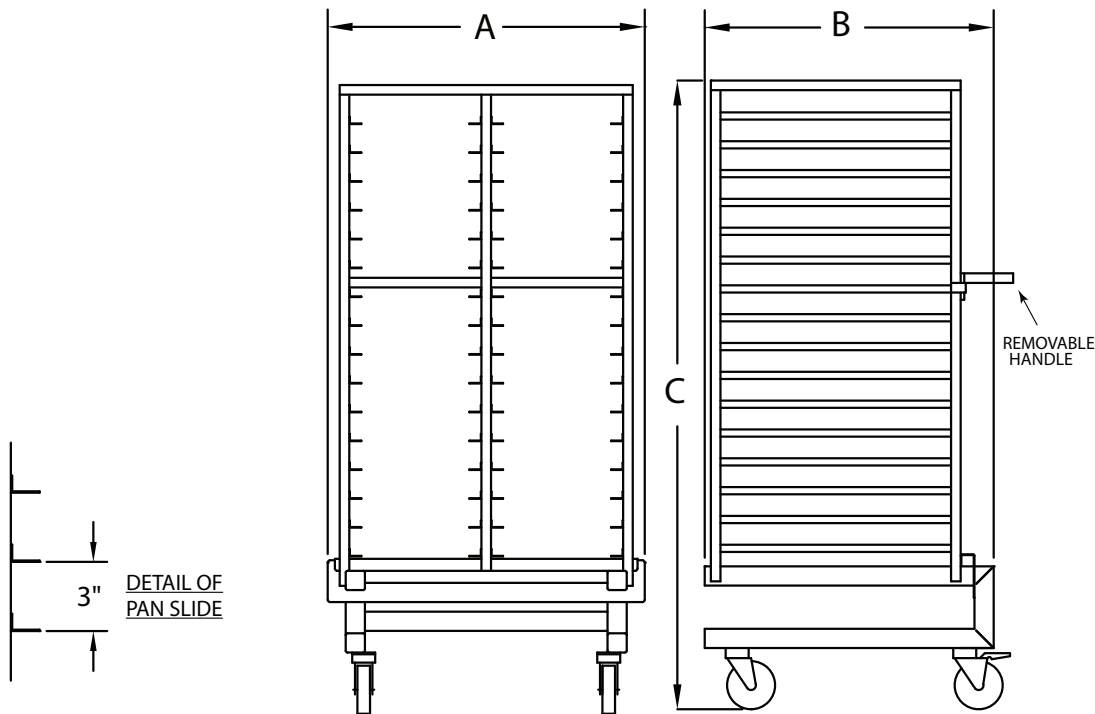

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS			WEIGHT ACT.	
	CAPACITY	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH*	DEPTH	HEIGHT		
ROR-201-SBS-1332-D	32 BASKETS	13 x 26	IN	35-5/8	30-1/4	65-1/2	13-5/8	26	49-1/2	LBS	131
		330 x 660	MM	905	768	1663	346	660	1257	KG	59

ALL CONSTRUCTION IS WELDED AND FINISHED STAINLESS STEEL.

*INSIDE WIDTH DIMENSION IS FOR ONE SIDE.

ROLL-IN RACK:

- Posts, top frame, handle: 1" square tubing, .065 thick, welded together.
- Dolly bottom: 2" square, 14 ga. tubing, welded.
- Angles (16 sets): Formed, 16 ga., welded on 3" centers.
- 5" dia. swivel, modulus tires, 1-1/4" wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Two casters equipped with swivel lock brakes.
- Capacity: 2 baskets side-by-side, 16 baskets high, 32 baskets total, 320 meals total.
- Total weight capacity for retherm: Maximum unit loading equals 150 lbs. equally distributed among 32 baskets at 4.66 lbs./basket, per Annex B in NSF Standard 4 "Performance Test Methods for Rethermalization Equipment".
- NOTE: BASKETS NOT INCLUDED.

SHORT FORM SPECIFICATIONS

Cres Cor Roll-In Rack Model ROR-201-SBS-1332-D. Specifically designed for wire basket use only with RR-1332-D Series Ovens and RH-1332-D Series Roll-In Hot Cabinets. Extruded and welded stainless steel construction. Holds (32) side-by-side baskets, on 3" angles. Inboard 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45° to +180°F. 2-Year Parts / 1-Year Labor warranty. Lifetime guarantee against rust & corrosion. Provide the following accessories:

_____ .