

| Project:  | AIA# |
|-----------|------|
| Item:     |      |
| Location: | SIS# |
| Approved: |      |

# CHEF BASE FREEZER

WTFCS72HC Four Drawer Chef Base Hydrocarbon Series

MODEL: WTFCS72HC



7 Year Parts/Labor Warranty 7 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Stainless steel front, sides, drawers and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Top has full marine edge to prevent spills from dripping over sides
- Full electronic control
- Top weight capacity 1500 lbs
- One-piece, snap-in magnetic drawer gasket
- 12-Gauge stainless steel drawer slides with Delrin® rollers rated at 275 lbs
- · Lifetime warranty on all drawers and slides
- Heavy duty, fire-proof, insulated 16 gauge top
- No heat shield required (must adhere to proper clearance per owners manual)
- Accommodates 6" deep full size food service pans (not included)
- · Self-closing drawer feature
- Compressor available on left or right, specify at time of unit order
- 3" Casters, 2 with brakes standard

## **OPTIONS & ACCESSORIES**

- Stainless steel back
- Stainless steel interior
- Additional pan supports
- 6" Adjustable legs, 6" seismic legs
- 6" Casters
- Gasket guards
- Flat top overhang (up to 6" overhang on each side)
- Remote option\*
   (refrigerant must be specified at time of order, see note on back on page)

### **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Non-electric defrost with hot gas condensate evaporation
- Freezer capable of maintaining product temperature of -10°F






3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




| MODEL                                | WTFCS72HC            |  |
|--------------------------------------|----------------------|--|
| EXTERNAL DIMENSIONAL DATA            |                      |  |
| Width Overall                        | 72"                  |  |
| Depth Overall (with handle & bumper) | 34 ¾"                |  |
| Height Overall (with casters)        | 24 ¾"                |  |
| No. of Drawers / Pans                | 4 / 8 Full size      |  |
| Depth with Drawers Extended          | 57 ¾"                |  |
| Drawer Openings                      | (4) 27 3/8" x 6 1/2" |  |
| INTERNAL DIMENSIONAL DATA            |                      |  |
| NET Capacity (cubic ft.)             | 12.30                |  |
| Internal Width Overall (in)          | 58"                  |  |
| Internal Depth Overall (in)          | 22 ¾"                |  |
| Internal Height Overall (in)         | 16 ¾"                |  |
| ELECTRICAL DATA                      |                      |  |
| Full Load Amperes                    | 5.0                  |  |
| REFRIGERATION DATA                   |                      |  |
| Horsepower                           | 1/2                  |  |
| Capacity (BTU/Hr)                    | 1725                 |  |
| Heat Rejection (BTU/Hr)              | 2588                 |  |
| Charge (lbs/grams/ounces)            | 0.287 / 130 / 4.59   |  |
| WEIGHT DATA                          |                      |  |
| Gross Weight - Crated                | 575 lbs              |  |
| Height - Crated                      | 27"                  |  |
| Width - Crated                       | 78"                  |  |
| Depth - Crated                       | 38"                  |  |

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4\*. Metric dimensions (MM).



# **Chef Base Freezer Model: WTFCS72HC**

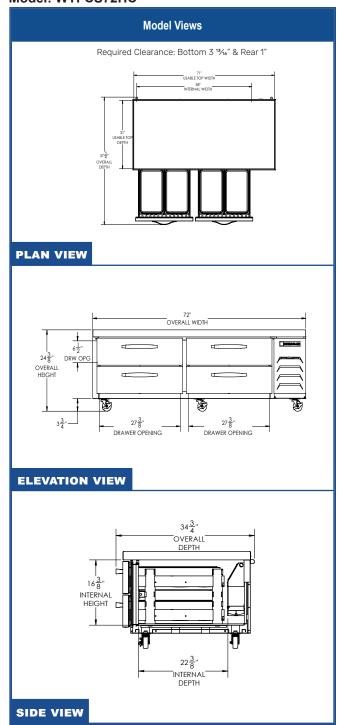



#### **ELECTRICAL CONNECTION**



115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.

