



SELF-CONTAINED BACK BAR REFRIGERATOR
2- and 4-Door, Sliding



eco friendly
 R290 Hydrocarbon Refrigerant



SDBS108 shown

JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS	
SDBS60	2-Door Model
SDBS108	4-Door Model

NSF/ANSI Standard 7 Listed for open food storage.
 Note: Models furnished with wine temperature are listed for the storage and display of bottled and canned products only.

KEY PRODUCT FEATURES AND BENEFITS

- Self-closing sliding glass doors available in two or four door models
- Sliding glass door can be propped open for easy stocking
- Stainless steel interior & top standard on all Perlick Back Bar refrigeration for long life durability and easy to clean hygienic storage
- 2" foamed-in-place eco-friendly insulation provides energy savings with zero ozone depletion
- NSF/ANSI Standard 7 Listed for open food, beverage, and garnish storage
- End wall compressor & evaporator design increases storage capacity by 14% compared to top mounted designs
- All sliding door models come with black framed glass doors
- Drawers not available on sliding door models

Quick Features:

- Choose compressor mounted on left or right side of cabinet to match your space
- NSF Rated digital controller allows for easy and precise temperature changes
- Choose between three temperature ranges
 - Refrigerator (34°F-42°F) Factory set to 38°F
 - White Wine (40°F-65°F) Factory set to 45°F
 - Red Wine (40°F-65°F) Factory set to 60°F
- Choose between 6000K white LED lighting or cool blue display lighting
- Choose between flat shelving and wine racks for each compartment
- 1 Year Parts and Labor Warranty, 5 Year Compressor Warranty
- Made in USA



SELF-CONTAINED BACK BAR REFRIGERATOR
2- and 4-Door, Sliding

MODEL NUMBERS - SDBS60, SDBS108

MODEL NUMBERS		SDBS60	SDBS108
NUMBER OF DOORS		2	4
EXTERIOR CABINET DIMENSIONS	Length - in. (mm)	60 (1524)	108 (2743)
	Depth - in. (mm)	24¾ (629)	24¾ (629)
	Height - in. (mm)	34¾ (878)	34¾ (878)
INTERIOR CABINET DIMENSIONS	Length - in. (mm)	44 (1118)	92 (2337)
	Depth - in. (mm)	18¾ (476)	18¾ (476)
	Height - in. (mm)	28½ (724)	28½ (724)
INTERNAL VOLUME Net. Cu. Ft. (Litres)		14.8 (419)	30.9 (875)
PRODUCT CAPACITY	CASE PACKED - 12 OZ. BOTTLE/CAN	353/553	753/1183
	STAGGERED - 12 OZ. BOTTLE/CAN	381/592	815/1272
SHIPPING WEIGHT Lbs. (kg.)		380 (172)	630 (286)
ELECTRICAL SPECIFICATIONS	Electrical Supply	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph
	Running Load Amps	2.5	4.2
	Electrical Connection	Cord connected	Cord connected
	Cord Plug Type	NEMA 5-15	NEMA 5-15
	Cord Length	6'5"	6'5"
	Defrost Initiation	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle
	Thermostat	Digital control	Digital control
	Lighting Type	LED	LED
REFRIGERATION SPECIFICATIONS	Horsepower	1/5	1/4
	Refrigerant	R290	R290
	Refrigerant Charge gm.	100	90
	Heat Rejection at 75F BTU/hr	1900	2300
	Factory Temperature Setting - Refrigerator F (C)	38° (3.3°)	38° (3.3°)
	Temperature Range - Refrigerator F (C)	33°-40° (0.5°-4.5°)	33°-40° (0.5°-4.5°)
	Factory Temperature Setting - White Wine F (C)	50°-55° (10.0°-13.0°)	50°-55° (10.0°-13.0°)
	Factory Temperature Setting - Red Wine F (C)	60°-65° (15.5°-18.0°)	60°-65° (15.5°-18.0°)
	Temperature Range - Wine F (C)	50°-65° (10.0°-18.0°)	50°-65° (10.0°-18.0°)
	Condensing Unit Location	Left or Right	Left or Right
	Expansion Device	Capillary tube	Capillary tube
	Pull-Out Condensing Unit	Yes	Yes
	Front Vented	Yes	Yes
PLUMBING	Floor Drain Included	Yes	Yes
	Evaporator Condensate	Automatically	Automatically


Wine Temperature refrigerators do not carry NSF Rating for open food storage.

Wine Temperature units are NSF certified for non-potentially hazardous bottled and canned beverage storage.



SELF-CONTAINED BACK BAR REFRIGERATOR
2- and 4-Door, Sliding

Note: Open floor drain not provided on models intended for non-packaged food.

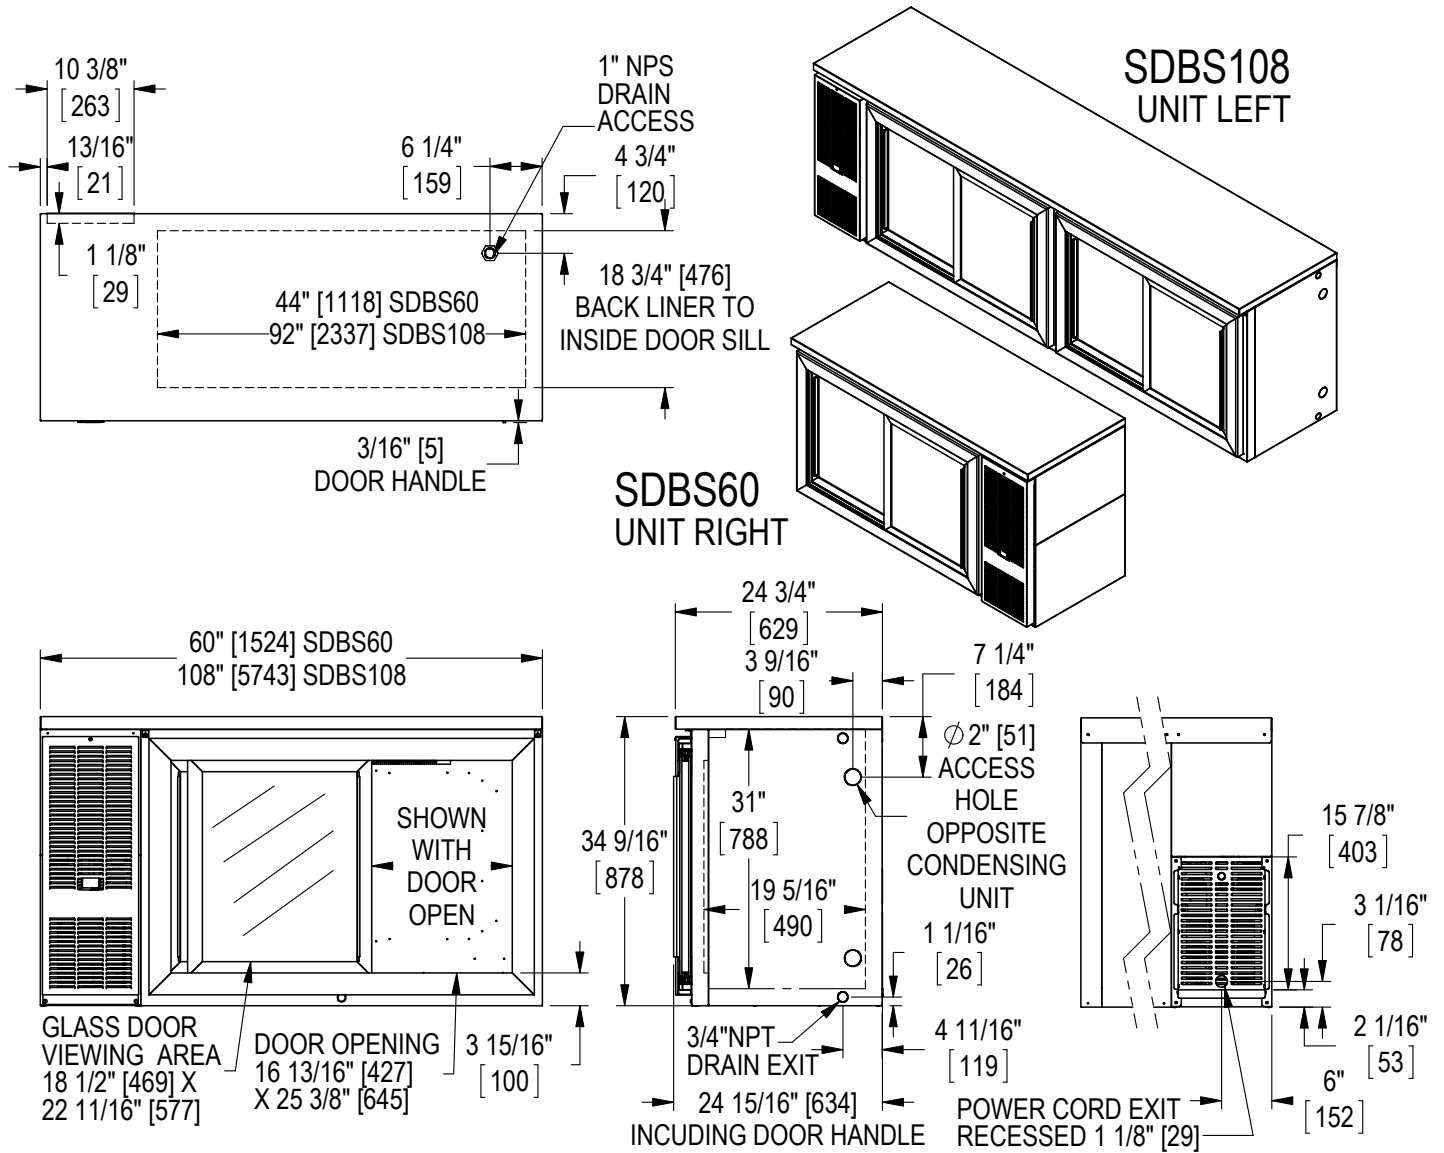

California Prop 65 Notice:

WARNING: The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Form No. 95178
Rev. 06.16.2022