



ADVENTYS

INDUCTION

GRIDDLES

INDUCTION GRIDDLES FOR PROFESSIONALS

High energy efficiency (90%)

- Stainless steel casing
- Counter-top or drop-in
- Precise and hygienic capacitive touch controls
- Superior airflow and cooling fans permit all day use
- 12 temperature settings (122°F - 536°F)
- Fast preheat time: 2 minutes to 400°F
- Easy-to-clean with ice cubes and scraper
- Lower operating temperature due to energy efficiency and heat concentration
- Drain and grease container (Counter-top units only)
- With drain only (drop-in models only)
- Removable grease filter cleans air intake

ORYX

BGIC 3000, 3600

208/240 V



- Counter-top, single zone
- Stainless steel casing with multi-layer grill surface
- Capacitive touch controls with 4 digits display
- 3 preset settings
- Control panel: on/off + (+/-)

KUDU

GLP 6000

208/240 V



- Counter top, two zones
- Stainless steel casing with multi-layer grill surface
- Capacitive touch controls with 4 digits display
- One piece griddle plate with integral back and sides splashes
- Control panel: on/off + (+/-)

GAZELLE

DGIC 3000, 3600

208/240 V




- Drop-in, single zone
- Stainless steel casing with multi-layer grill surface
- Capacitive touch controls with 4 digits display
- 3 preset settings
- Control panel: on/off + (+/-)




100 NIAN TIC AVENUE; SUITE 104 PROVIDENCE, RI 02907
 TEL: (401)273-3300 FAX: (401) 273-3328 E-mail: sales@equipex.com
 www.equipex.com




Induction Griddles

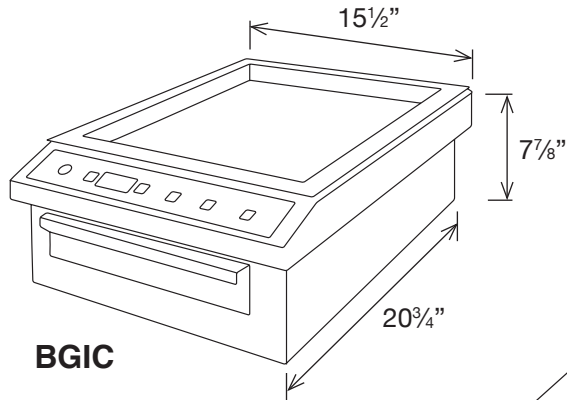

BGIC

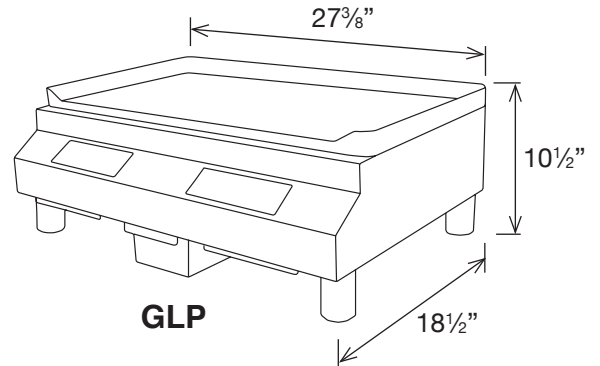

GLP

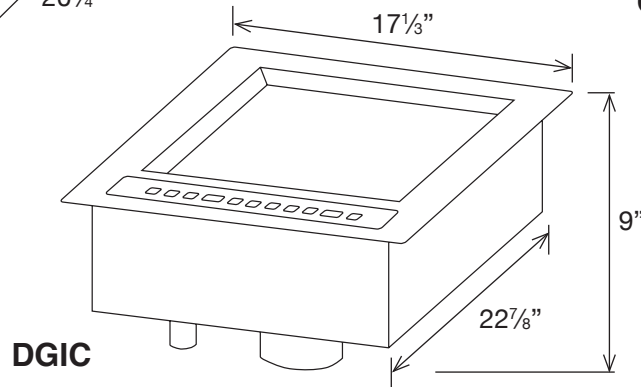

DGIC

SPECIFICATIONS

MODEL	ELECTRICAL	EXTERIOR DIMENSIONS	WORK SURFACE DIMENSIONS	SHIPPING WEIGHT	NEMA PLUG
BGIC 3000	208/240V, 1PH 3.0KW, 12/14 Amps	15 1/2"W x 20 3/4"D x 7 7/8"H	11 3/4"W x 14 3/4"D	63 lbs	6 - 20P
BGIC 3600	208/240V, 1PH 3.6KW, 15/17 Amps	15 1/2"W x 20 3/4"D x 7 7/8"H	11 3/4"W x 14 3/4"D	63 lbs	L6-30P
DGIC 3000	208/240V, 1PH 3.0KW, 12/14 Amps	17 1/3"W x 22 7/8"D x 9"H	11 3/4"W x 14 3/4"D	63 lbs	6 - 20P
DGIC 3600	208/240V, 1PH 3.6KW, 15/17 Amps	17 1/3"W x 22 7/8"D x 9"H	11 3/4"W x 14 3/4"D	63 lbs	L6 - 30P
GLP 6000	208/240V, 1PH 6.0KW, 25/29 Amps	27 3/8"W x 18 1/2"D x 10 1/2"H	25"W x 12 1/2"D	110 lbs	6 - 50P

MODEL	CUT OUT SIZE DROP-IN
DGIC 3000/3600	16 1/4"W x 21 3/4"D

WARRANTY: Limited two-year parts and labor