

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

SIDE MOUNT UNDERCOUNTER REFRIGERATOR

UCR119AHC Solid Door Refrigerator Hydrocarbon Series MODEL: UCR119AHC





 Stainless steel front, sides, top, doors and grille (galvanized steel back & bottom)

7 Year Parts/Labor Warranty

- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- Interior thermometer is standard
- Self-closing doors with 120° stay-open feature
- Magnetic gasket attached to each door for positive seal
- 6" Casters, two (2) with brakes standard
- Eight (8) epoxy-coated steel wire shelves
- Field-reversible doors

OPTIONS & ACCESSORIES

- · Stainless steel back
- Stainless steel interior
- Additional shelves
- Shelf clips
- · Right or left hinged door
- Door locks
- · Wire shelf divider
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- · Low profile casters
- Roller kit
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F








MODEL	UCR119AHC	
EXTERNAL DIMENSIONAL DATA		
Width Overall	118 ½"	
Depth Overall with Handle & Bumper	34 ¾"	
Height Overall with 6" Casters	34 ½"	
Number of Doors	4	
Depth with Door Open 90°	57 ½ "	
Door Opening	21 %" x 23 %"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	40.12	
Internal Width Overall (in)	115"	
Internal Depth Overall (in)	26"	
Internal Height Overall (in)	25"	
Number of Shelves	8	
ELECTRICAL DATA		
Full Load Amperes	5.0	
REFRIGERATION DATA		
Horsepower	1/3	
Capacity (BTU/Hr)	2629	
Heat Rejection (BTU/Hr)	3943.5	
Charge (lbs/grams/ounces)	0.3086 / 140 / 4.94	
SHIPPING DATA		
Gross Weight - Crated	590 lbs	
Height - Crated	39"	
Width - Crated	122"	
Depth - Crated	35"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Undercounter Refrigerator - Side Mount Model: UCR119AHC

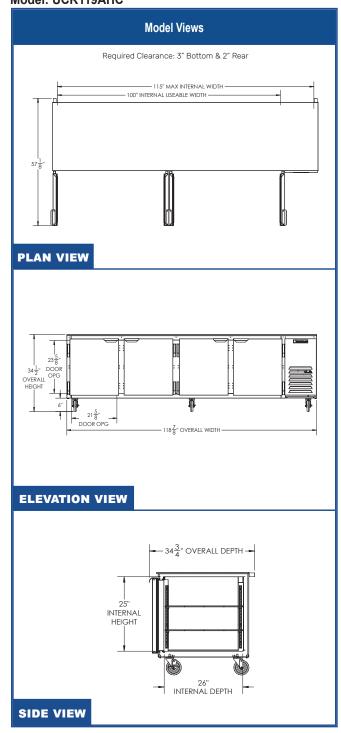



ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord and plug set.

