





Floor Troughs & Drains

EAGLETM
Foodservice Equipment Division
Profit from the Eagle Advantage[®]

Anti-splash Floor Troughs

- A wide variety of uses: drain off at ice machines, cooking lines, indirect drainage at walk-in boxes, or floor kettles.
- Patented “anti-splash” design assures complete drainage while preventing splash back onto floor.
- Built-in pitch towards drain insures complete drainage.
- Heavy duty 14 gauge type 304 stainless steel all-welded construction.
- Floor troughs come with subway-style stainless steel or fiberglass grating.
- Stainless steel drain accommodates up to a 4” diameter pipe, and features a removable perforated stainless steel basket.
- Custom lengths available. Consult factory for details.
- Troughs with **NEW** Pultruded Wide T-Bar Fiberglass Grating available. ADA-approved for use with the physically handicapped! Wide T-bar width provides a more solid walking area, and prevents objects from fall through. Resistant to corrosion, skid, fire, chipping and cracking.

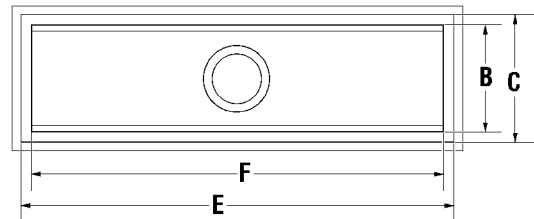

(see charts below for dimensions A through F)

Note To Installers: Add 1/4” to floor dimensions “D” & “F”

12”-wide Troughs

dimension A: 7”
dimension B: 9”
dimension C: 12”
dimension D: 11.25”

dimension E	dimension F	12”-wide Troughs			15”-wide Troughs		
		WITH FIBERGLASS GRATING model #	WITH PULTRUDED ADA-APPROVED FIBERGLASS GRATING model #	WITH STAINLESS STEEL GRATING model #	WITH FIBERGLASS GRATING model #	WITH PULTRUDED ADA-APPROVED FIBERGLASS GRATING model #	WITH STAINLESS STEEL GRATING model #
18”	15”	ASFT-1218-FG	ASFT-1218-FG-ADA	ASFT-1218-SG	n/a	n/a	n/a
24”	21”	ASFT-1224-FG	ASFT-1224-FG-ADA	ASFT-1224-SG	ASFT-1524-FG	ASFT-1524-FG-ADA	ASFT-1524-SG
30”	27”	ASFT-1230-FG	ASFT-1230-FG-ADA	ASFT-1230-SG	ASFT-1530-FG	ASFT-1530-FG-ADA	ASFT-1530-SG
36”	33”	ASFT-1236-FG	ASFT-1236-FG-ADA	ASFT-1236-SG	ASFT-1536-FG	ASFT-1536-FG-ADA	ASFT-1536-SG
48”	45”	ASFT-1248-FG	ASFT-1248-FG-ADA	ASFT-1248-SG	ASFT-1548-FG	ASFT-1548-FG-ADA	ASFT-1548-SG
60”	57”	ASFT-1260-FG	ASFT-1260-FG-ADA	ASFT-1260-SG	ASFT-1560-FG	ASFT-1560-FG-ADA	ASFT-1560-SG
72”	69”	ASFT-1272-FG	ASFT-1272-FG-ADA	ASFT-1272-SG	ASFT-1572-FG	ASFT-1572-FG-ADA	ASFT-1572-SG
84”	81”	ASFT-1284-FG	ASFT-1284-FG-ADA	ASFT-1284-SG	ASFT-1584-FG	ASFT-1584-FG-ADA	ASFT-1584-SG
96”	93”	ASFT-1296-FG	ASFT-1296-FG-ADA	ASFT-1296-SG	ASFT-1596-FG	ASFT-1596-FG-ADA	ASFT-1596-SG
120”	117”	ASFT-12120-FG	ASFT-12120-FG-ADA	ASFT-12120-SG	ASFT-15120-FG	ASFT-15120-FG-ADA	ASFT-15120-SG

18”-wide Troughs

dimension A: 13”
dimension B: 15”
dimension C: 18”
dimension D: 17.25”



dimension E	dimension F	18”-wide Troughs			24”-wide Troughs		
		WITH FIBERGLASS GRATING model #	WITH PULTRUDED ADA-APPROVED FIBERGLASS GRATING model #	WITH STAINLESS STEEL GRATING model #	WITH FIBERGLASS GRATING model #	WITH PULTRUDED ADA-APPROVED FIBERGLASS GRATING model #	WITH STAINLESS STEEL GRATING model #
24”	21”	ASFT-1824-FG	ASFT-1824-FG-ADA	ASFT-1824-SG	ASFT-2424-FG	ASFT-2424-FG-ADA	ASFT-2424-SG
30”	27”	ASFT-1830-FG	ASFT-1830-FG-ADA	ASFT-1830-SG	ASFT-2430-FG	ASFT-2430-FG-ADA	ASFT-2430-SG
36”	33”	ASFT-1836-FG	ASFT-1836-FG-ADA	ASFT-1836-SG	ASFT-2436-FG	ASFT-2436-FG-ADA	ASFT-2436-SG
48”	45”	ASFT-1848-FG	ASFT-1848-FG-ADA	ASFT-1848-SG	ASFT-2448-FG	ASFT-2448-FG-ADA	ASFT-2448-SG
60”	57”	ASFT-1860-FG	ASFT-1860-FG-ADA	ASFT-1860-SG	ASFT-2460-FG	ASFT-2460-FG-ADA	ASFT-2460-SG
72”	69”	ASFT-1872-FG	ASFT-1872-FG-ADA	ASFT-1872-SG	ASFT-2472-FG	ASFT-2472-FG-ADA	ASFT-2472-SG
84”	81”	ASFT-1884-FG	ASFT-1884-FG-ADA	ASFT-1884-SG	ASFT-2484-FG	ASFT-2484-FG-ADA	ASFT-2484-SG
96”	93”	ASFT-1896-FG	ASFT-1896-FG-ADA	ASFT-1896-SG	ASFT-2496-FG	ASFT-2496-FG-ADA	ASFT-2496-SG
120”	117”	ASFT-18120-FG	ASFT-18120-FG-ADA	ASFT-18120-SG	ASFT-24120-FG	ASFT-24120-FG-ADA	ASFT-24120-SG

Floor Troughs

- A wide variety of uses: drain off at ice machines, cooking lines, indirect drainage at walk-in boxes, or floor kettles.
- Heavy duty 14 gauge type 304 stainless steel all-welded construction.
- Designed for assurance of complete drainage.
- Stainless steel drain accommodates up to a 4" diameter pipe, and features a removable perforated stainless steel basket.
- Floor drains and floor troughs come with subway-style stainless steel or fiberglass grating.
- Custom lengths available. Consult factory for details.
- Troughs with **NEW** Pultruded Wide T-Bar Fiberglass Grating available. ADA-approved for use with the physically handicapped! Wide T-bar width provides a more solid walking area, and prevents objects from fall through. Resistant to corrosion, skid, fire, chipping and cracking.



MODEL #FT-1248-SG FLOOR TROUGH
WITH STAINLESS STEEL GRATING

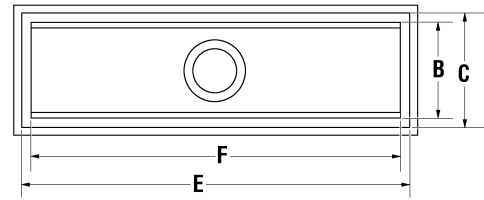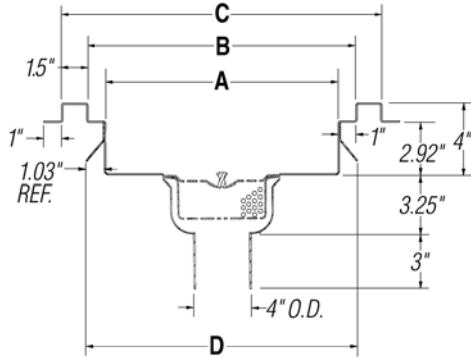

(see charts below for dimensions A through F)

Note To Installers: Add 1/4" to floor dimensions "D" & "F"

12"-wide Troughs

dimension A: 7"
dimension B: 9"
dimension C: 12"
dimension D: 9.25"

dimension E	dimension F	WITH FIBERGLASS GRATING model #	WITH PULTRUDED ADA-APPROVED FIBERGLASS GRATING model #	WITH STAINLESS STEEL GRATING model #	WITH FIBERGLASS GRATING model #	WITH PULTRUDED ADA-APPROVED FIBERGLASS GRATING model #	WITH STAINLESS STEEL GRATING model #
18"	15"	FT-1218-FG	FT-1218-FG-ADA	FT-1218-SG	n/a	n/a	n/a
24"	21"	FT-1224-FG	FT-1224-FG-ADA	FT-1224-SG	FT-1524-FG	FT-1524-FG-ADA	FT-1524-SG
30"	27"	FT-1230-FG	FT-1230-FG-ADA	FT-1230-SG	FT-1530-FG	FT-1530-FG-ADA	FT-1530-SG
36"	33"	FT-1236-FG	FT-1236-FG-ADA	FT-1236-SG	FT-1536-FG	FT-1536-FG-ADA	FT-1536-SG
48"	45"	FT-1248-FG	FT-1248-FG-ADA	FT-1248-SG	FT-1548-FG	FT-1548-FG-ADA	FT-1548-SG
60"	57"	FT-1260-FG	FT-1260-FG-ADA	FT-1260-SG	FT-1560-FG	FT-1560-FG-ADA	FT-1560-SG
72"	69"	FT-1272-FG	FT-1272-FG-ADA	FT-1272-SG	FT-1572-FG	FT-1572-FG-ADA	FT-1572-SG
84"	81"	FT-1284-FG	FT-1284-FG-ADA	FT-1284-SG	FT-1584-FG	FT-1584-FG-ADA	FT-1584-SG
96"	93"	FT-1296-FG	FT-1296-FG-ADA	FT-1296-SG	FT-1596-FG	FT-1596-FG-ADA	FT-1596-SG
120"	117"	FT-12120-FG	FT-12120-FG-ADA	FT-12120-SG	FT-15120-FG	FT-15120-FG-ADA	FT-15120-SG

15"-wide Troughs

dimension A: 10"
dimension B: 12"
dimension C: 15"
dimension D: 12.25"

18"-wide Troughs

dimension A: 13"
dimension B: 15"
dimension C: 18"
dimension D: 15.25"


dimension E	dimension F	WITH FIBERGLASS GRATING model #	WITH PULTRUDED ADA-APPROVED FIBERGLASS GRATING model #	WITH STAINLESS STEEL GRATING model #	WITH FIBERGLASS GRATING model #	WITH PULTRUDED ADA-APPROVED FIBERGLASS GRATING model #	WITH STAINLESS STEEL GRATING model #
24"	21"	FT-1824-FG	FT-1824-FG-ADA	FT-1824-SG	FT-2424-FG	FT-2424-FG-ADA	FT-2424-SG
30"	27"	FT-1830-FG	FT-1830-FG-ADA	FT-1830-SG	FT-2430-FG	FT-2430-FG-ADA	FT-2430-SG
36"	33"	FT-1836-FG	FT-1836-FG-ADA	FT-1836-SG	FT-2436-FG	FT-2436-FG-ADA	FT-2436-SG
48"	45"	FT-1848-FG	FT-1848-FG-ADA	FT-1848-SG	FT-2448-FG	FT-2448-FG-ADA	FT-2448-SG
60"	57"	FT-1860-FG	FT-1860-FG-ADA	FT-1860-SG	FT-2460-FG	FT-2460-FG-ADA	FT-2460-SG
72"	69"	FT-1872-FG	FT-1872-FG-ADA	FT-1872-SG	FT-2472-FG	FT-2472-FG-ADA	FT-2472-SG
84"	81"	FT-1884-FG	FT-1884-FG-ADA	FT-1884-SG	FT-2484-FG	FT-2484-FG-ADA	FT-2484-SG
96"	93"	FT-1896-FG	FT-1896-FG-ADA	FT-1896-SG	FT-2496-FG	FT-2496-FG-ADA	FT-2496-SG
120"	117"	FT-18120-FG	FT-18120-FG-ADA	FT-18120-SG	FT-24120-FG	FT-24120-FG-ADA	FT-24120-SG

24"-wide Troughs

dimension A: 19"
dimension B: 21"
dimension C: 24"
dimension D: 21.25"


Replacement Subway-Style Grating

Fiberglass Grating



- 1" high yellow or grey polyester material with a non slip grit on top surface.
- Tapered "I" beam construction for ease of cleaning and drainage.
- Sizes available fit floor drains and troughs ranging from 12" to 24" wide.

NEW Pultruded Wide T-Bar Fiberglass Grating -ADA-approved*!



- Solid walking surface.
- One-third the weight of steel.
- Skid resistant, fire retardant.
- High impact strength.
- Low maintenance.
- Low thermal conductivity.
- One-directional load capacity.
- Resistant to corrosion, chipping and cracking.

* Pultruded wide T-bar fiberglass grating conforms to ADA guidelines when installed in compliance with guidelines.

Stainless Steel Grating



- Type 304 stainless steel construction.
- Constructed of 3/8" x 1" vertically positioned bars, spaced 1" apart to allow ease of drainage 1/8" clearance between bars prevents casters on mobile equipment from wedging in grate.
- Two 3/8" rods, set 2 1/2" in from each edge, are welded to the bars to eliminate swaying. Grates 12" and 15" wide feature three rods, grates 21" wide feature five rods.
- Available in widths up to 24".

Floor Drains

Bottom is creased to insure complete drainage. Perforated waste cup can be inverted to double as a bee hive strainer. Comes with fiberglass grating or subway-style grating.



floor drain shown without grating

description	W x L in.	model #
with fiberglass grating	12" x 12"	FD-FG
with subway-style grating	12" x 12"	FD-SG

Note: Floor opening = 11 1/2" x 11 1/2"

for floor trough width	grate width x length	stainless steel model #	fiberglass model #	Pultruded model #
12"	9" x 7 1/2"	341169	n/a	n/a
12"	9" x 9"	341117	374015	370000
12"	9" x 12"	341123	374018	370001
12"	9" x 15"	n/a	374021	370002
15"	12" x 9"	340992	374044	370003
15"	12" x 12"	331006	374047	370004
18"	15" x 6"	341330	n/a	n/a
18"	15" x 7 1/2"	341110	n/a	n/a
18"	15" x 9"	341113	374073	370005
18"	15" x 12"	336992	374076	370006
18"	15" x 15"	345934	374079	370007
24"	21" x 9"	341109	374102	370008
24"	21" x 11"	351572	n/a	n/a
24"	21" x 12"	336976	374105	370009

© 2008 Eagle Group. The Eagle Advantage™ is a trademark of Eagle Group.

Although every attempt has been made to ensure the accuracy of the data in this publication, we cannot be responsible for printing or typographical errors or omissions.



VALUE

QUALITY

RELIABILITY

Profit from the Eagle Advantage®

Corporate Headquarters • 100 Industrial Boulevard
Clayton, DE 19938-8903
• Phone: (302) 653-3000

Foodservice/SpecFAB® Divisions • Phone: (800) 441-8440
• Fax: (302) 653-2065

Material Handling Division • Phone: (800) 637-5100
• Fax: (302) 653-2065

www.eaglegrp.com



EG7023 Rev 09/08