

# Tray Delivery Carts

## Premier Series™ High Capacity - Stainless Steel

Models 831, 832, 835  
836, 837



Model 835

### Low Profile Design For Safe View During Transport

- Perimeter bumper protects walls, furnishings and doors
- Accepts 14" x 18" (356 x 457 mm) or 15" x 20" (381 x 508 mm) trays
- 5" (127 mm) ledge spacing
- Doors conveniently open 270° for easy tray access
- Designed for rugged acute care foodservice use
- Easy to clean and sanitize. Simply wipe down or steam clean
- Removable ledge panels for easy cleaning



### Specifications

Unit is of welded and riveted 300-series stainless steel construction and accommodates either 14" x 18" (356 x 457 mm) or 15" x 20" (381 x 508 mm) meal trays. Top and base are 16-gauge stainless steel. Base has drain(s) to facilitate cleaning. Side and back panels are 18-gauge stainless steel. Tray compartment(s) feature louvered vents on side and back panels. Tray ledge panels are one-piece formed of 18-gauge stainless steel with 5" (127 mm) ledge spacing. Ledge panels are adjustable to accommodate 14" x 18" or 15" x 20" (508 mm) trays and are removable to facilitate cleaning. Door(s) are of 20-gauge double pan construction, with 1" (25 mm) rigid fiberglass insulation for sound deadening and have a stainless steel flush-mount paddle latch. Door(s) are mounted on heavy-duty stainless steel lift-off hinges which allow 270° door swing. Unit features a non-marking full-perimeter bumper and stainless steel push handle. Casters are extra-load 8" (203 mm) diameter, two fixed and two swivel with brakes, with 2" (51 mm) wide non-marking rounded cushion tread wheels. Unit is NSF listed.

#### Models 831 and 832 only:

Casters are extra-load 6" (152 mm) diameter, two fixed and two swivel with brakes, with 2" (51 mm) wide non-marking rounded cushion tread wheels.

Spec. #

AIA #

Lakeside Manufacturing, Inc.


4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.

800-558-8565 • 414-902-6400 • Fax 414-902-6446 • info@eLakeside.com • www.eLakesideFoodservice.com

**Models**  
**831, 832**  
**835, 836**  
**837**

# Tray Delivery Carts

Premier Series™ High Capacity - Stainless Steel

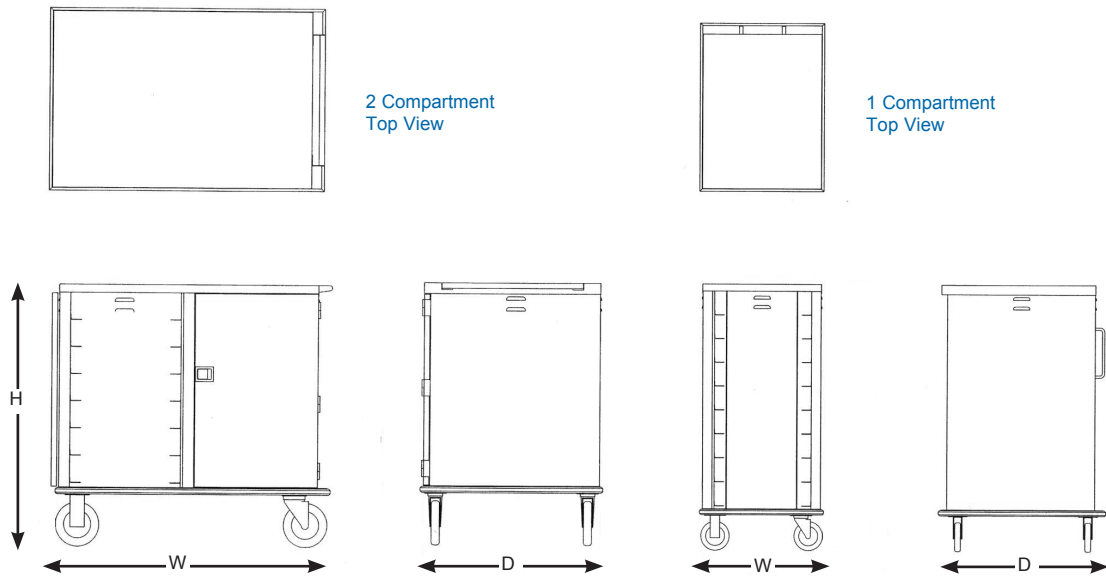

AutoCAD drawings available through KCL CADalog

## Optional Accessories

- 8" diameter casters (Models 831 and 832)
- Extra push handle
- Identification card holder
- Decorative laminate door panels

## Product Information

Model	Tray Capacity*	Ledge Spacing	Interior Compartments	Overall			Casters		Ship Weight Lbs. (Kg.)
				W	D	H	Type	Dia.	
831	18 ea. 14" x 18" or 15" x 20" (356 x 457) or (381 x 508)	5" (127)	1	36¾" (908)	26" (664)	56" (1422)	2 Swivel 2 Rigid	6"	300 (136)
832	20 ea. 14" x 18" or 15" x 20" (356 x 457) or (381 x 508)	5" (127)	1	36¾" (908)	26" (664)	61" (1549)	2 Swivel 2 Rigid	6"	320 (145)
835	24 ea. 14" x 18" or 15" x 20" (356 x 457) or (381 x 508)	5" (127)	2	52" (1321)	34¾" (883)	43" (1092)	2 Swivel 2 Rigid	8"	425 (193)
836	28 ea. 14" x 18" or 15" x 20" (356 x 457) or (381 x 508)	5" (127)	2	52" (1321)	34¾" (883)	48" (1219)	2 Swivel 2 Rigid	8"	450 (205)
837	32 ea. 14" x 18" or 15" x 20" (356 x 457) or (381 x 508)	5" (127)	2	52" (1321)	34¾" (883)	53" (1346)	2 Swivel 2 Rigid	8"	475 (216)

Measurements in ( ) denote metric millimeters, unless otherwise specified.



Lakeside Manufacturing, Inc.  
 4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.  
 800-558-8565 • 414-902-6400 • Fax 414-902-6446  
 info@eLakeside.com • www.eLakesideFoodservice.com