

"ST4R1.5-SSK" STAINLESS STEEL TOP WORK TABLES

14GA Top w/1.5" Riser & Stainless Steel Legs & Adjustable Undershef

FEATURES:

- 14GA Stainless Steel Top
- Type 300 Stainless Steel With #4 Polish, Satin Finish
- Top Is Sound Deadened
- Reinforced With 1"x2" Channel Running Length Of Table
- 1-1/2" Stallion Edge On Front And 1-1/2" Backsplash On Rear With Side Edges 90 Degree Bend Down For Table Line-Up
- Stainless Steel Base With Adjustable Undershef
- Adjustable Bullet Feet
- Shipped Knocked-Down, Easy-To-Assemble

SPECIFICATIONS:

- Top: Stainless Steel Tops Are TIG Welded, Exposed Welds Are Polished To Match Adjacent Surface
- Top: 14GA, Type 300 Stainless Steel With #4 Polish, Satin Finish
- Shelf: 18GA Stainless Steel, (36" Wide Tables, 16 GA Lower Shelf)
- Legs: 1-5/8" Round O.D. , 16GA Tubular Stainless Steel
- Gussets: Stainless Steel
- Feet: 1" Adjustable Stainless Steel Bullet Feet



ST4R1.5-3048SSK

CERTIFICATIONS:



ACCESSORIES

DESCRIPTION



- Drawer
- Drawer Lock
- Casters
- Overshelves
- Sinks
- Pot Rack

"ST4R1.5-SSK" STAINLESS STEEL TOP WORK TABLES




LENGTH	24" WIDE	WT	WT CAP	30" WIDE	WT	WT CAP	36" WIDE	WT	WT CAP
24"	ST4R1.5-2424SSK	46	900	ST4R1.5-3024SSK	52	900	ST4R1.5-3624SSK	61	900
30"	ST4R1.5-2430SSK	52	900	ST4R1.5-3030SSK	58	900	ST4R1.5-3630SSK	70	900
36"	ST4R1.5-2436SSK	58	900	ST4R1.5-3036SSK	67	900	ST4R1.5-3636SSK	81	900
48"	ST4R1.5-2448SSK	72	900	ST4R1.5-3048SSK	82	900	ST4R1.5-3648SSK	100	900
60"	ST4R1.5-2460SSK	85	650	ST4R1.5-3060SSK	98	650	ST4R1.5-3660SSK	120	650
72"	ST4R1.5-2472SSK	98	420	ST4R1.5-3072SSK	113	420	ST4R1.5-3672SSK	139	420
84"	ST4R1.5-2484SSK	119	1350	ST4R1.5-3084SSK	137	1350	ST4R1.5-3684SSK	168	1350
96"	ST4R1.5-2496SSK	132	1350	ST4R1.5-3096SSK	153	1350	ST4R1.5-3696SSK	188	1350
108"	ST4R1.5-24108SSK	145	1350	ST4R1.5-30108SSK	168	1350	ST4R1.5-36108SSK	209	1350
120"	ST4R1.5-24120SSK	158	1200	ST4R1.5-30120SSK	184	1200	ST4R1.5-36120SSK	229	1200
132"	ST4R1.5-24132SSK	171	960	ST4R1.5-30132SSK	200	960	ST4R1.5-36132SSK	248	960
144"	ST4R1.5-24144SSK	184	750	ST4R1.5-30144SSK	216	750	ST4R1.5-36144SSK	268	750

OVERALL WEIGHT (WT) AND MAX WEIGHT CAPACITY (WT CAP) ARE IN POUNDS (LBS). MAX WEIGHT CAPACITY EVENLY DISTRIBUTED. ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500". JOHN BOOS & CO. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

DETAILED SPECIFICATIONS

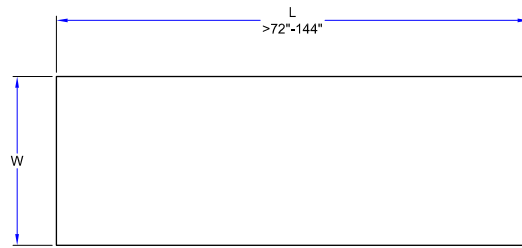

Units 7 Ft. & Larger Are
Furnished With Six Legs
Shelf Length = Length Minus 4.875"
Shelf Width = Width Minus 4.25"

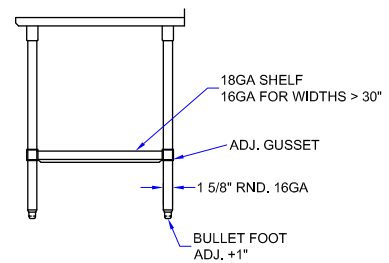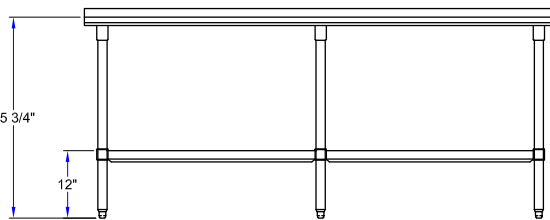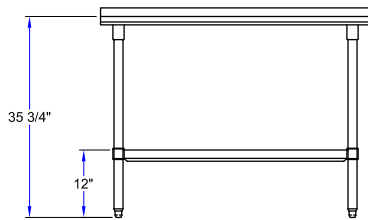

MODEL # STRUCTURE

1.5 = Ht. Of Riser w/Turndown

R = Top w/Riser

4 = 14GA Work Surface

ST = Stainless Steel Top

24 = Width Of Work Surface

30 = Length Of Work Surface

SS = Stainless Legs & Shelf

K = Ships Knocked Down

ST4R1.5-2430SSK

"ST4R1.5-SSK" STAINLESS STEEL TOP WORK TABLES

LENGTH	24" WIDE	WT	WT CAP	30" WIDE	WT	WT CAP	36" WIDE	WT	WT CAP
24"	ST4R1.5-2424SSK	46	900	ST4R1.5-3024SSK	52	900	ST4R1.5-3624SSK	61	900
30"	ST4R1.5-2430SSK	52	900	ST4R1.5-3030SSK	58	900	ST4R1.5-3630SSK	70	900
36"	ST4R1.5-2436SSK	58	900	ST4R1.5-3036SSK	67	900	ST4R1.5-3636SSK	81	900
48"	ST4R1.5-2448SSK	72	900	ST4R1.5-3048SSK	82	900	ST4R1.5-3648SSK	100	900
60"	ST4R1.5-2460SSK	85	650	ST4R1.5-3060SSK	98	650	ST4R1.5-3660SSK	120	650
72"	ST4R1.5-2472SSK	98	420	ST4R1.5-3072SSK	113	420	ST4R1.5-3672SSK	139	420
84"	ST4R1.5-2484SSK	119	1350	ST4R1.5-3084SSK	137	1350	ST4R1.5-3684SSK	168	1350
96"	ST4R1.5-2496SSK	132	1350	ST4R1.5-3096SSK	153	1350	ST4R1.5-3696SSK	188	1350
108"	ST4R1.5-24108SSK	145	1350	ST4R1.5-30108SSK	168	1350	ST4R1.5-36108SSK	209	1350
120"	ST4R1.5-24120SSK	158	1200	ST4R1.5-30120SSK	184	1200	ST4R1.5-36120SSK	229	1200
132"	ST4R1.5-24132SSK	171	960	ST4R1.5-30132SSK	200	960	ST4R1.5-36132SSK	248	960
144"	ST4R1.5-24144SSK	184	750	ST4R1.5-30144SSK	216	750	ST4R1.5-36144SSK	268	750

OVERALL WEIGHT (WT) AND MAX WEIGHT CAPACITY (WT CAP) ARE IN POUNDS (LBS). MAX WEIGHT CAPACITY EVENLY DISTRIBUTED.
ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500". JOHN BOOS & CO. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.