

PROJECT:		
ITEM #	QTY:	
MODEL #		
AIA #	SIS #	

# BOTTOM MOUNT GLASS DOOR DISPLAY FREEZER WITH ELECTRONIC LOCK

LSF27HC-1-IQ



## **EXCLUSIVE WARRANTY**

- 7 Year Parts, Labor and Compressor
- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)



#### CABINET CONSTRUCTION

- · Stainless Steel Exterior (galvanized back)
- · Aluminum Interior
- Full Electronic Control
- · Expansion Valve Technology
- Anti-Condensate Door Perimeter Heaters
- · LED Lighting
- · High-Performance, Balanced, Bottom-Mounted Refrigeration
- · Triple-Pane Glass Door
- Spring-Loaded Hinge With Stay-Open Door Feature For Easy Product Loading
- One-Piece, Snap-In Magnetic Door Gasket
- · Five (5) Heavy-Duty Epoxy Coated Shelves
- 6" Overall Height Casters Standard
- 8' Cord And Plug (see electrical data for details)

#### **FEATURES**

- · Full Electronic Control
- · Expansion Valve Technology
- · Anti-Condensate Door Perimeter Heaters

#### **ELECTRONIC LOCK FEATURES**

- Secure Temperature-Sensitive Product For Worry-Free Operation
- Automatically Locks When Power Loss Or Temperature Drop Is Sensed
- Led Indicator To Quickly View Status
- · Easy-Access Test Switch For Health Inspectors
- Built-In Safety Feature Allow Escape In Case Of Accidental Lock-In

### REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Hot Gas Condensate Evaporator
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- · Epoxy Coated Evaporator Coil
- Freezer Capable Of Maintaining Product Temperature 0°F



Please Verify Qualifying Units By Visiting: www.energystar.gov/cfs

### **OPTIONS & ACCESSORIES**

CUL US KEE AQ

- · Stainless Steel, Black Or White Interior
- Additional Shelves
- · Custom Color Cabinet
- · 3" Casters Or 6" Seismic Legs
- Door Swing Orientation (at time of order)
- Remote Models\* (6" legs only) (refrigerant must be specified at time of order, see note on back page)


3779 Champion Blvd, Winston-Salem, NC 27105
ph: (888) 845-9800 | fax: (800) 253-5168
Sclope Victor (Deficientation com | Victor (Deficientation com |

Sales@VictoryRefrigeration.com VictoryRefrigeration.com


 Rev. 7/1/24 Printed in the U.S.A.
 APPROVAL:
 DATE:





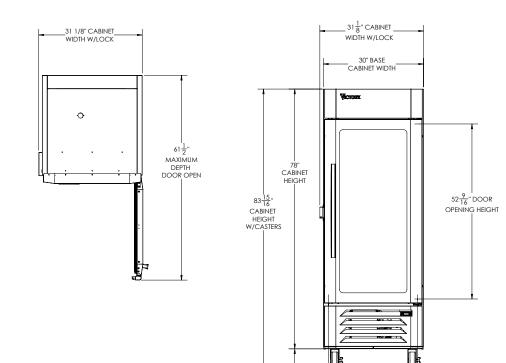

5<sup>15</sup>" CASTER HEIGHT

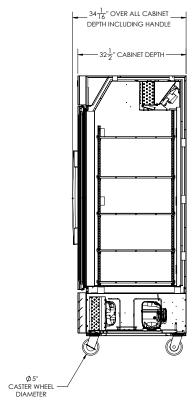

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements,  $additions\ or\ replacements\ for\ previously\ purchased\ equipment.\ Dimensional\ tolerances\ +/-\ 1/4".\ Metric\ dimensions\ (MM)$ 

\_\_ 26\frac{13}{16}" DOOR \_ OPENING WIDTH

12" Top, 6" Bottom, 3" Sides & 3" Rear clearance is required

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	25.5	Cabinet Voltage	115/60/1	Height	85"
Width, Overall (with lock)	31 1/8"	Total Amperes	7.5	Width	33"
Depth, Overall (with handle)	34 1/16"	NEMA Plug (8' cord)	5-15P	Depth	36"
Height Overall (with casters)	83 15/16"	REFRIGERATION DATA		Crated Weight	452 lbs
Depth, Door Open 90°	61 1/2"	Condensing Unit Size, HP	3/4	*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at	
Door Opening (in.)	26 13/16" x 52 9/16"	Refrigerant*	R-290		
No. Of Doors/Shelves	1/5	Capacity (BTU/HR) (100°F/-20°F)	1927		
		Heat Rejection (BTU/HR)	2890.5	time of order.	
		Charge (lbs/grams/ounces)	0.2204 / 100 / 3.53		

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 7/1/24 Printed in the U.S.A.

